




Down-flow Mobile Home Unit

- Manufactured with double door for quieter operation
- Easy accessible dual filter for better quality air flow
- Manufactured with filter racks on both sides to provide better quality air flow

Blower Performance for 1/2HP

| Model | Speed | External Static Pressure vs Coil Static Pressure 0.2" W.C.* | | | | | |
|-------|--------|---|------|------|------|--|--|
| | | 0.1 | 0.2 | 0.3 | 0.4 | | |
| ADFM | High | 1560 | 1550 | 1550 | 1550 | | |
| | Med-Hi | 1200 | 1220 | 1230 | 1210 | | |
| | Low | 950 | 1010 | 1000 | 1010 | | |

| Model | Speed | External Static Pressure vs Coil Static Pressure 0.3" W.C.* | | | | | |
|-------|--------|---|------|------|------|--|--|
| | | 0.1 | 0.2 | 0.3 | 0.4 | | |
| ADFM | High | 1590 | 1550 | 1550 | 1520 | | |
| | Med-Hi | 1210 | 1200 | 1210 | 1220 | | |
| | Low | 990 | 980 | 980 | 980 | | |

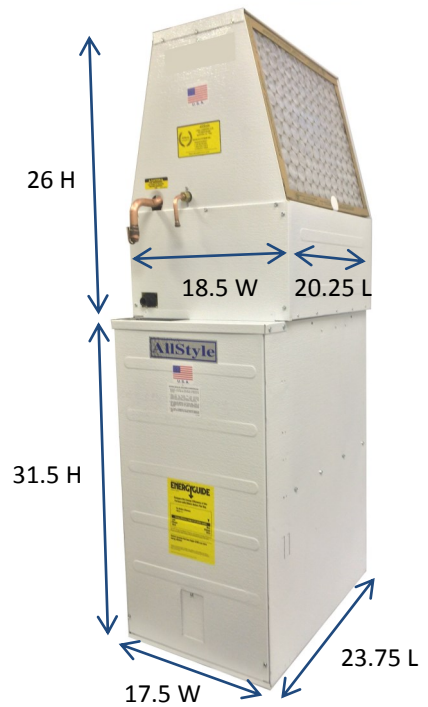

Over All Height 57.5"

Blower Performance for 3/4HP

| Model | Speed | External Static Pressure vs Coil Static Pressure 0.2" W.C.* | | | | | |
|-------|--------|---|------|------|------|--|--|
| | | 0.1 | 0.2 | 0.3 | 0.4 | | |
| ADFM | High | 2030 | 2000 | 1970 | 1950 | | |
| | Med-Hi | 1560 | 1550 | 1550 | 1550 | | |
| | Low | 1240 | 1230 | 1220 | 1230 | | |

| Model | Speed | External Static Pressure vs Coil Static Pressure 0.3" W.C.* | | | | | |
|-------|--------|---|------|------|------|--|--|
| | | 0.1 | 0.2 | 0.3 | 0.4 | | |
| ADFM | High | 1750 | 1750 | 1740 | 1720 | | |
| | Med-Hi | 1480 | 1470 | 1500 | 1520 | | |
| | Low | 1140 | 1130 | 1150 | 1150 | | |

Down-flow Mobile home Drives

ADFM-4D (1/2 HP)

Use ADFM-4D For 3-4 Tons Applications

ADFM-5D (3/4 HP)

Use ADFM-5D For 5 Tons applications only

Heat Strip Kits

3KWDFM-RP16009

5KWDFM-RP16010

8KWDFM-RP16011

10KWDFM-RP16012

15KWDFM-RP16013

20KWDFM-RP16014

RP54003

Drain Pan Replacement

Filter

(2) - 16 X20 X 1

Patented Product



AllStyle Coil Co., L.P.

7037 Brittmore; Houston, Texas 77041
www.allstyle.com © AllStyle Coil Co., L.P. 2003