


# BEAM CLAMP 255

## Malleable Iron Beam Clamp, Non-adjustable

- Size Range: 3/8", 1/2" and 5/8" rod sizes
- Surface Finish: Black, Electro-zinc plated
- Structural attachment to top or bottom of metal beams, purlins, channel, or angle iron
- Setscrew made of hardened steel
- For retainer straps see Models 255C
- Conforms with Federal Specification WW-H-171 (Type 23), Manufacturers Standardization Society ANSI/MSS-SP-58 (Type 23), install in accordance with ANSI/MSS-SP-69
- Setscrew must be tightened and torqued onto the sloped side of the I-beam



Part Number	RS	A	B	Set Screw	Max. Pipe Size	Max. Rec. Load (lbs)
Plain Finish						
2550037PL	3/8	3/4"	7/8"	3/8"	2"	400
2550050PL	1/2	3/4"	7/8"	3/8"	3-1/2"	400
2550062PL	5/8	3/4"	1-1/16"	3/8"	5"	400
Electro-zinc Plated Finish						
2550037EG	3/8	3/4"	7/8"	3/8"	2"	400
2550050EG	1/2	3/4"	7/8"	3/8"	3-1/2"	400
2550062EG	5/8	3/4"	1-1/16"	3/8"	5"	400

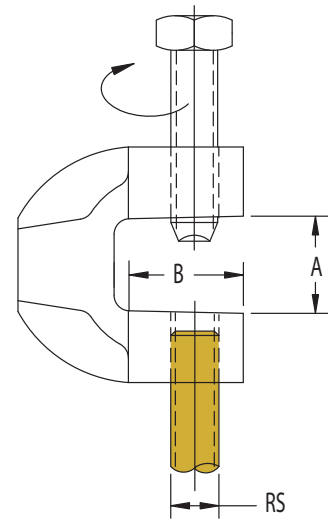

Recommended Torque\*\* (for setscrews):

Setscrew Size	1/4-20	3/8-16	1/2-13	5/8-11	3/4-10
Foot-lbs	4	5	11	21	34
Nm	(5)	(7)	(15)	(28)	(46)

\*\*Recognizing that torque wrenches are generally not used or available on many job sites, the setscrew should be tightened so it contacts the I-beam and then an additional 1/4 to 1/2 turn added.


# BEAM CLAMP 255L

## Malleable Iron Beam Clamp with Locknut, Non-adjustable

- Size Range: 3/8", 1/2" and 5/8" rod sizes
- Surface Finish: Black, Electro-zinc plated
- Structural attachment to top or bottom of metal beams, purlins, channel, or angle iron
- Setscrew made of hardened steel
- For retainer straps see Models 255C
- Conforms with Federal Specification WW-H-171 (Type 23), Manufacturers Standardization Society ANSI/MSS-SP-58 (Type 23), install in accordance with ANSI/MSS-SP-69
- Setscrew must be tightened and torqued onto the sloped side of the I-beam



Part Number	RS	A	B	Set Screw	Max. Pipe Size	Max. Rec. Load (lbs)
Plain Finish						
255L0037PL	3/8	3/4"	7/8"	3/8	2"	400
255L0050PL	1/2	3/4"	7/8"	3/8	3-1/2"	400
255L0062PL	5/8	3/4"	1-1/16"	3/8	5"	400
Electro-zinc Plated Finish						
255L0037EG	3/8	3/4"	7/8"	3/8	2"	400
255L0050EG	1/2	3/4"	7/8"	3/8	3-1/2"	400
255L0062EG	5/8	3/4"	1-1/16"	3/8	5"	400

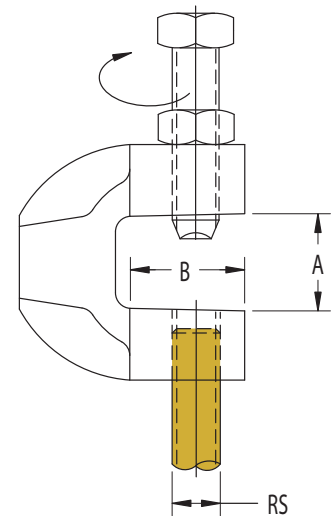

Recommended Torque\*\* (for setscrews):

Setscrew Size	1/4-20	3/8-16	1/2-13	5/8-11	3/4-10
Foot-lbs	4	5	11	21	34
Nm	(5)	(7)	(15)	(28)	(46)

\*\*Recognizing that torque wrenches are generally not used or available on many job sites, the setscrew should be tightened so it contacts the I-beam and then an additional 1/4 to 1/2 turn added.