


PADS

Air Handler Base.....26
 Anti-Vibration Pads..... 27-28
 Cladlite® Lightweight Equipment Pads.....22
 E Lite® Plastic Equipment Pads.....21
 Enviropad™25
 Heat Pump Pads25
 Heat Pump Risers26
 Heater Pads25
 Hef-T-Pad™24
 Mounting Brackets, Blocks27
 The Black Pad®24
 The Hurricane Pad™23
 Ultralite® Lightweight Equipment Pads.....20-21

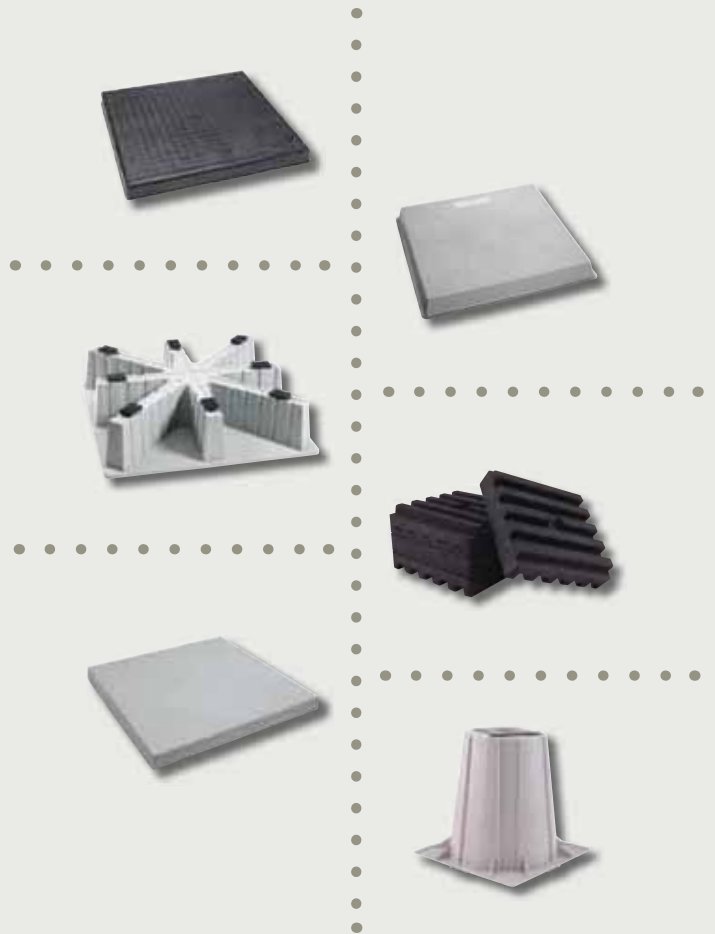

E Lite[®] Plastic Equipment Pads

E Lite[®] is a plastic pad designed as a mounting base for air conditioning condensers. The rugged design provides uniform and generous ribbing for optimum, self-leveling ground support without inserts. E Lite[®] is injection molded from polypropylene, resulting in a pad that is lightweight, but not too light. A subtle texture prevents unit slide and presents a classic appearance, which is enhanced by rounded edges and a concrete gray color. Each pad is molded with its size in raised letters.



This information is available as a contractor handout.
Order item number LIT-FLY-ELITE.



TECHNICAL DATA

MATERIAL

Polypropylene

FREEZE/THAW

Flawless performance under the 25-cycle regimen specified by ASTM C67

CHEMICAL RESISTANCE

Does not crack, flake, or warp when tested per ASTM D2299 with the following:

- R-22 and R-134a
- Synthetic canine urine
- Compressor oil
- Salt solution, 20% by volume




Each pad is molded with its size in raised letters.

FEATURES AND BENEFITS

- Lightweight, yet rugged
- Drillable for securing unit
- Uniform ribbing transfers load evenly
- Unaffected by UV or weather
- Subtle texture resists unit slide



The bottom of a 2" E Lite® pad shows extensive ribbing.



The bottom of a 3" E Lite® pad shows ribbing plus additional surface support.



E Lite® plastic equipment pads are manufactured at DiversiTech's Conyers, Georgia plant.

Hef-T-Pad™ Equipment Pads

Hef-T-Pad™ is an injection molded equipment pad created from high impact polypropylene with UV inhibitors making it easy to handle, yet durable and strong. It does not require any additional equipment for moving and handling. Hef-T-Pad™ is resistant to impact, ultraviolet degradation and weathering and will not crack, flake, or warp. It is virtually impervious to climatic variations. Hef-T-Pad™ is drillable to permit installation of refrigerant and electrical lines under and through the pad and to allow equipment to be easily secured to the pad.



This information is available as a contractor handout.
Order item number LIT-FLY-HEF.

FEATURES AND BENEFITS OF THE HEF-T-PAD™

Stabilization foot increases the surface area for bearing stabilization on soil; reduces sinking in soft soil under heavy load. Support ribs provide structural support.



Stabilization flange provides a wide perimeter that reduces sinking in soft soil under heavy load. Both the flange and ribbing provide reinforcement for the corners.




The thick walled polymer is suitable for drilling and screw fastening of equipment, line sets, and electrical connections.



Attractive neutral gray color with pad size and branding clearly embossed on pad surface.



Textured surface provides good aesthetics and a non-skid surface.

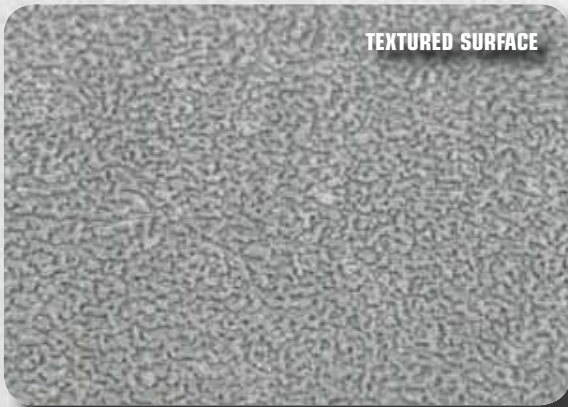

Pad size is molded into the side of the pad as well as the top surface.



The Black Pad[®] replaces Concrete Equipment Bases

Eco-friendly



An innovative equipment base, The Black Pad[®] uses ground, recycled rubber in a co-injection process. The pad is extremely durable, resistant to ultraviolet light, and heavier than a completely plastic pad. The Black Pad[®] is ideal for pool and spa pumps, filters and heaters. The Black Pad[®] is extremely weather resistant and easy to drill and secure pool and spa equipment.



This information is available as a contractor handout.
Order item number LIT-FLY-BPPOOL.

DIVERSITECH 

- No cracking and less breakage than concrete
- Extremely durable, yet lightweight
- UV resistant; unaffected by weather
- Generous ribbing for optimum, self-leveling ground support
- Outer edges have rounded corners with double-thick walls
- Uniform ribbing transfers load evenly
- Textured surface prevents equipment slippage
- Drillable for securing equipment
- Made of recycled material
- ICC Certified to 1997 Standard Swimming Pool Code sections 305.2 Mounting and section 405 Equipment Foundations and Enclosures.

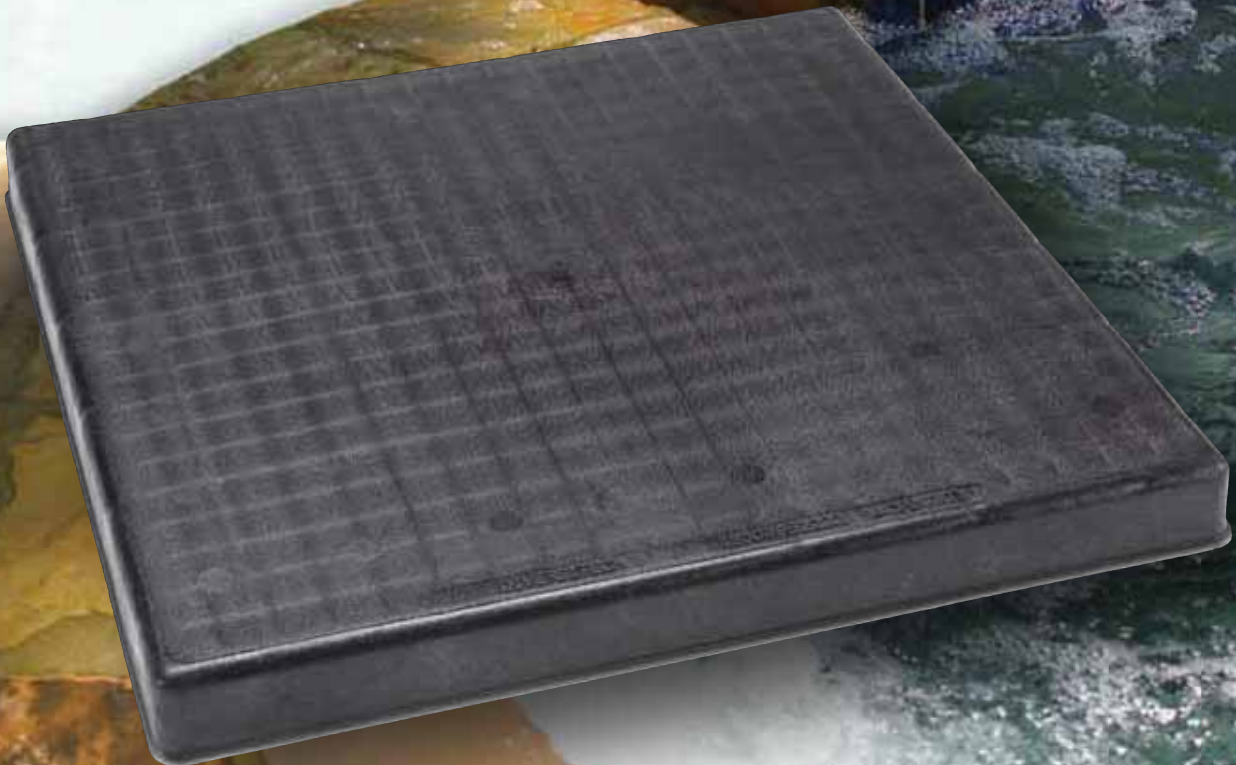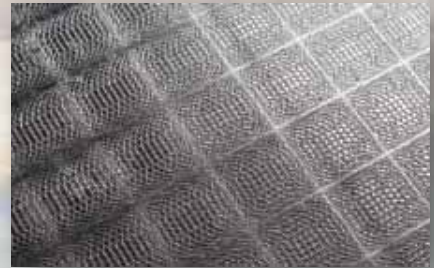

UltraLite[®] Equipment Pads

P
A
D
S



UltraLite[®] Pads are made by DiversiTech, North America's largest manufacturer of equipment pads.

This information is available as a contractor handout.
Order item number LIT-FLY-UC.



FEATURES AND BENEFITS

LIGHTWEIGHT At an average weight of 2-1/2 pounds per square foot (12 kg. per square metre), the UltraLite lightweight concrete pad is one of the lightest equipment mounting products available today. Lightweight products are important for ease of handling on job site.

DURABLE The exterior of the UltraLite lightweight concrete pad is specifically engineered for long-term exterior weather resistance.

DUCTILE The skin and core of the UltraLite lightweight concrete pad is specifically engineered for flexibility and ductility demanded of job site handling. Additionally, the ductility of the outer skin facilitates conformance to slight ground contours without fracture.

TIME/LABOR SAVINGS Time is money, and hence any time savings on site translates into money saved. The UltraLite lightweight concrete pad literally installs in seconds while providing a solid foundation for the condensing unit.

CONCRETE SURFACE The concrete external skin of the UltraLite lightweight concrete pad is not subject to ultraviolet degradation or weathering discoloration.

VIBRATION ABSORBING The engineered polystyrene core in the UltraLite lightweight concrete pad absorbs and dampens vibration associated with normal operation of a condensing unit.

FREEZE/THAW RESISTANT The UltraLite lightweight concrete pad is vapor permeable. Water vapor evaporates through the pad, hence the concrete outer skin is not subject to expansion cracks.

FLAME RESISTANT The concrete outer skin of the UltraLite lightweight concrete pad is resistant to heating caused by the compressor. Additionally, the surface is resistant to heat from incidental torch flame during site installation.

OUTSIDE STORAGE The UltraLite lightweight concrete pad is intended for life in the outdoors. As such, the pad is suitable for exterior storage prior to site installation.

TECHNICAL DATA

LOADING

To achieve the maximum permissible pad load capacity, the earth under the pad must be capable of supporting the transmitted compression load of the UltraLite pad. All values tabulated assume the earth has a bearing capacity of at least 1000 pounds per square foot (48 kPa).

The allowable loads assume a uniformly distributed loading on the pad surface (that is, a relatively flat-bottomed condenser unit in contact with the pad). For condenser units with footpads or other point loads, the maximum concentrated load for any size UltraLite pad is 125 pounds per 2" (56 kg per 50 mm) diameter (or equivalent surface area) footpad.

CHEMICAL RESISTANCE

In normal usage conditions an equipment pad can be exposed to a variety of chemicals. The UltraLite pad has been fully tested in accordance with ASTM D2299 for resistance against:

- R-22 and R-134a
- Compressor oil
- Salt solution, 20 percent by volume
- Synthetic canine urine

The UltraLite pad performs extraordinarily well under these testing criteria. UltraLite does not craze, soften, delaminate, or spall under exposure in this test.

FREEZE/THAW TESTING

The UltraLite pad has been independently tested to the rigorous freeze-thaw regimen specified by ASTM C67. This standard dictates a twenty-five cycle freeze-thaw sequence. The freeze portion of the sequence takes place with the top surface of the UltraLite pad under 1/2" (12 mm) of water. Once twenty-five cycles are complete, the pad is examined using visual magnification. No cracks or crazing is permitted. UltraLite has performed flawlessly.



CladLite® Equipment Pads

P
A
D
S



Tough. Durable. Strong.

This information is available as a contractor handout.
Order item number LIT-FLY-CLAD.



CladLite® Equipment Pads provide the strength and durability customers demand in an easy to install pad. CladLite® Pads are up to 80% lighter than solid concrete but still provide rock solid support for equipment. Once it's set, so are you. CladLite® Pads stay in place and can withstand anything mother nature can throw at them. These pads provide superior resistance to sun, moisture, and freeze-thaw conditions. And the vibration dampening EPS foam core is unaffected by water, soil, fungus or bacteria. CladLite® Pads are available in 2" and 3" thickness and more than 70 different sizes so you can get the exact pad you need for the job. Get the concrete pads that homeowners prefer – CladLite®.

CLADLITE® SPECIFICATIONS

Allowable Load: 125 lbs. per 2" diameter foot

Freeze/Thaw: Flawless performance under the 25-cycle regimen specified by ASTM C67

Chemical Resistance: Does not craze, soften, delaminate, or spall when tested per ASTM D2299 with the following:

- R-22 and R-134a
- Compressor oil
- Synthetic canine urine
- Salt solution, 20% by volume


Foam Core: ASTM Type 1 EPS

Flame Resistance: Cladding resists compressor heat and incidental torch contact. Not to be used under heating devices.



Heat Pump Pad™

Ideal for snowy climates, the new DiversiTech Heat Pump Pad™ is the perfect solution for protecting equipment and ensuring proper operation year round. The Heat Pump Pad™ provides a full 8" clearance from ground level in a compact 36" square footprint. Included with every Heat Pump Pad™ are 8 anti-vibration pads, specifically molded into slots in the pad to reduce vibration and provide quiet operation of your equipment. The base of the pad is also angled to direct melting snow or condensate away from the unit and pad. Heat Pump Pads are made from recycled polypropylene so they are eco-friendly and are built tough to provide many years of service. These pads also nest together for easier transportation and warehousing.

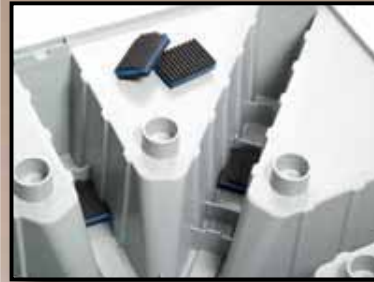

Each Heat Pump Pad™ includes eight Anti-Vibration pads to reduce equipment vibration and noise.



This information is available as a contractor handout.
Order item number LIT-FLY-HEAT.




The Hurricane Pad™

THE HURRICANE & THE HURRICANE T-CLASS PADS

Hurricane Strength Equipment Pads designed to Florida's tough standards.

- Steel reinforced
- 9,000 PSI fiber-concrete
- Much lighter than solid concrete
- The Hurricane Pads keep units from sliding or blowing over in 150 MPH winds when properly attached (see The Hurricane T-Class Pads section at right for exceptions)

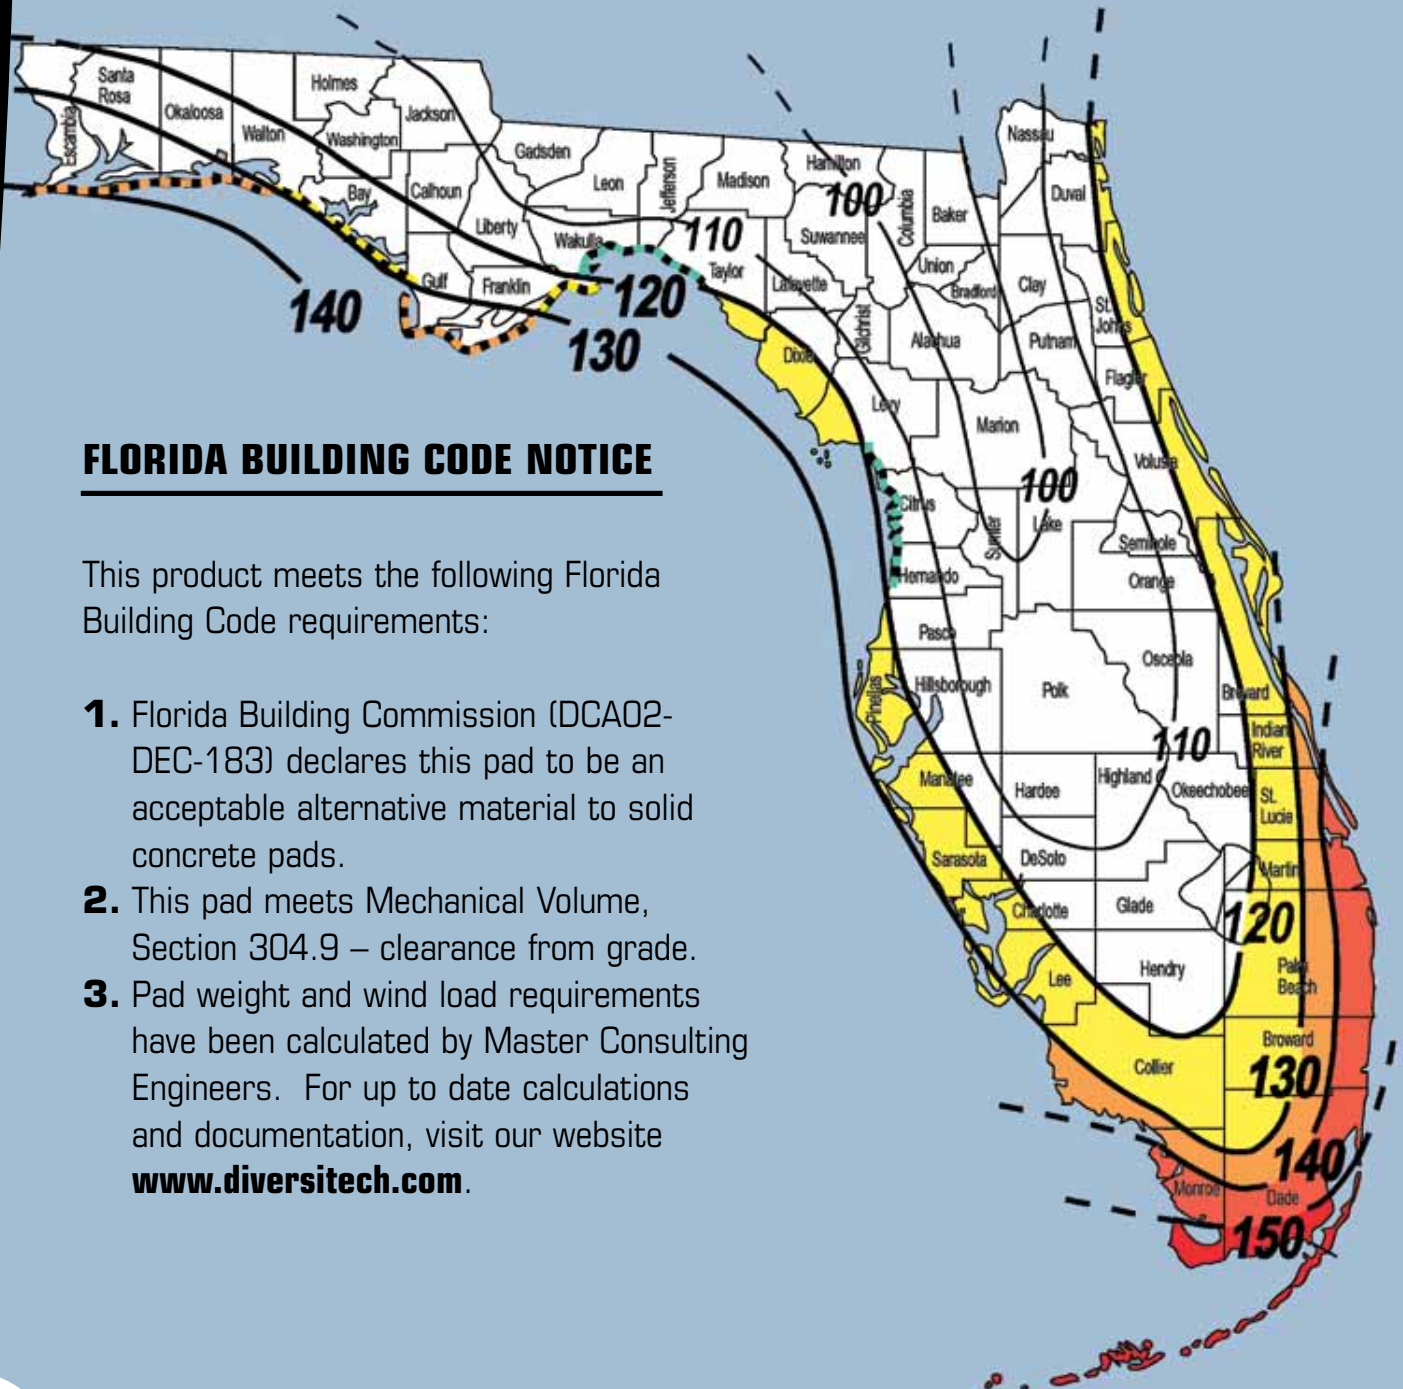

FLORIDA BUILDING CODE NOTICE

This product meets the following Florida Building Code requirements:

1. Florida Building Commission (DCA02-DEC-183) declares this pad to be an acceptable alternative material to solid concrete pads.
2. This pad meets Mechanical Volume, Section 304.9 – clearance from grade.
3. Pad weight and wind load requirements have been calculated by Master Consulting Engineers. For up to date calculations and documentation, visit our website www.diversitech.com.

This information is available as a contractor handout.
Order item number LIT-FLY-HPAD.



THE HURRICANE T-CLASS PADS

For certain taller equipment profiles that are used in high wind zone areas, T-Class pads may be required. For a complete list of pad sizes and information, please go to www.diversitech.com.




Equipment must be properly attached to The Hurricane Pad™ or The Hurricane T-Class Pad™ in order to prevent sliding and tipping in high winds.

Anti-Vibration Pads

EVA™ PAD: The BEST Performer

EVA™ (Extreme Vibration Attenuation) is the latest generation in vibration dampening technology. In the most severe vibration extremes, testing shows the EVA™ pad outperforms cork and rubber by greater than 3:1 and outperforms our competitor's "waffle" pad by greater than 8:1! The enhanced performance comes from the special composite foam center which is structurally more sound than cork. EVA™ is not affected by oils or chemicals that can break down cork and is much more effective at vibration dampening than solid rubber. Designed to withstand 50 psi. Choose EVA™ to get the best of both worlds!



ANTI-VIBRATION PAD PERFORMANCE

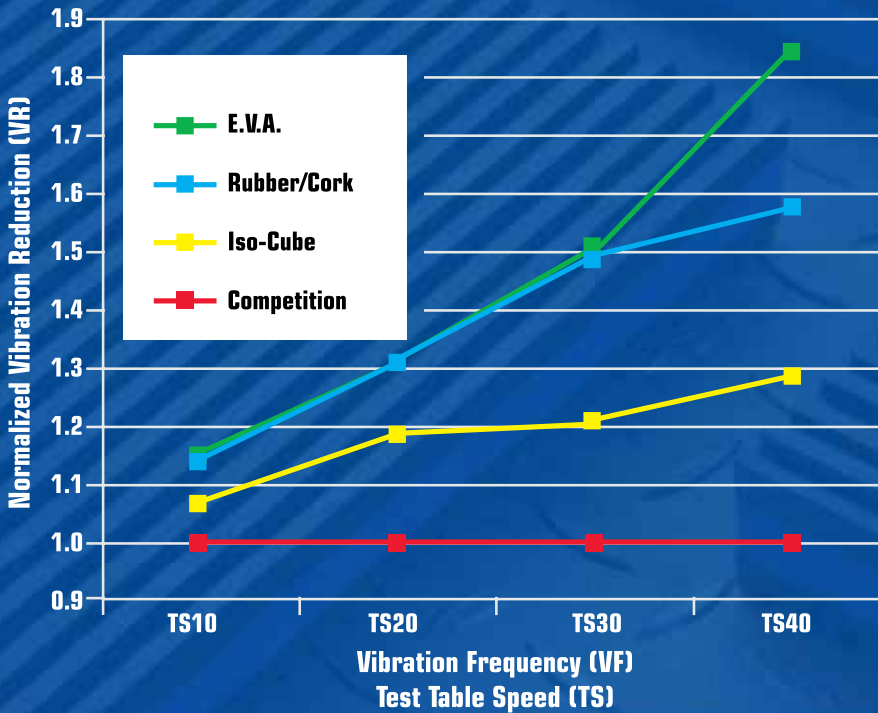

This information is available as a contractor handout.
Order item number LIT-FLY-AVPAD.

**RUBBER/CORK PAD:
The Industry Standard**

These pads are made with the highest quality elastomeric oil resistant padding. Designed to withstand 50 psi. The rubber pads are corrugated on both sides and laminated to the cork center.

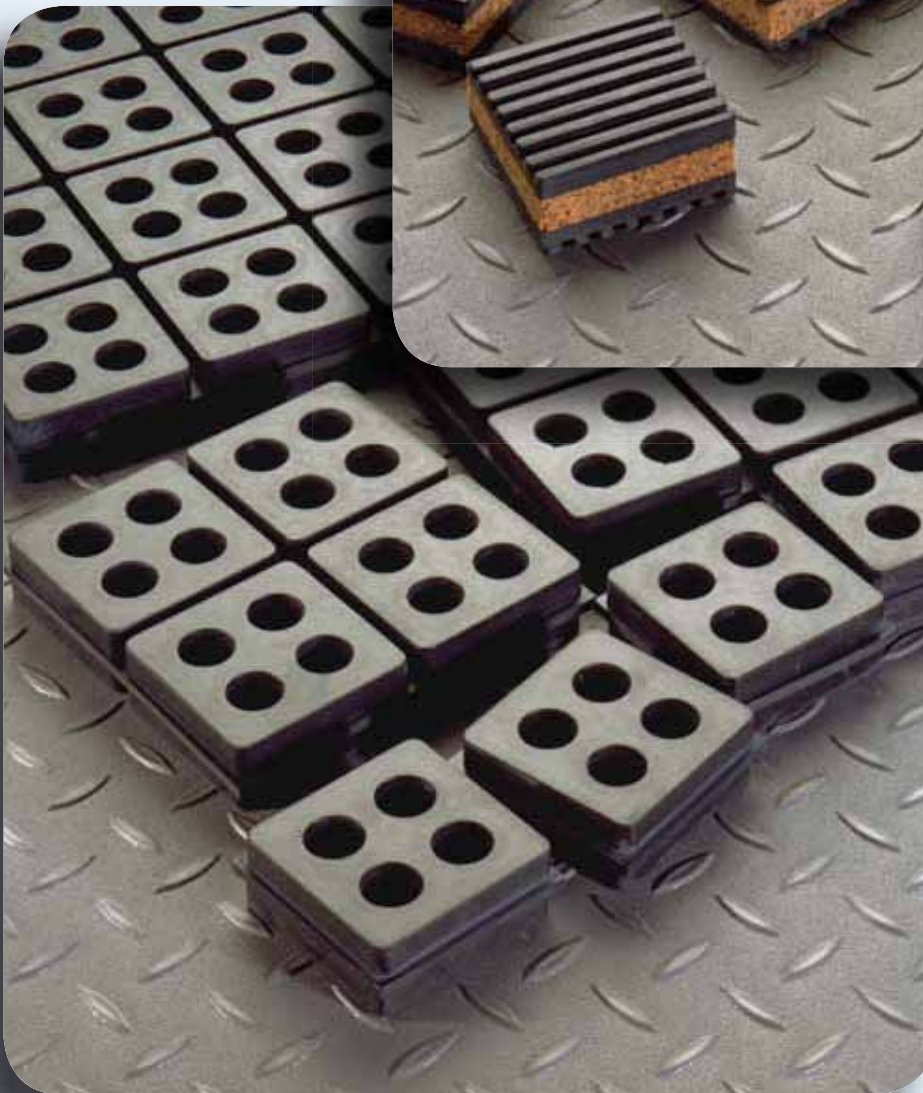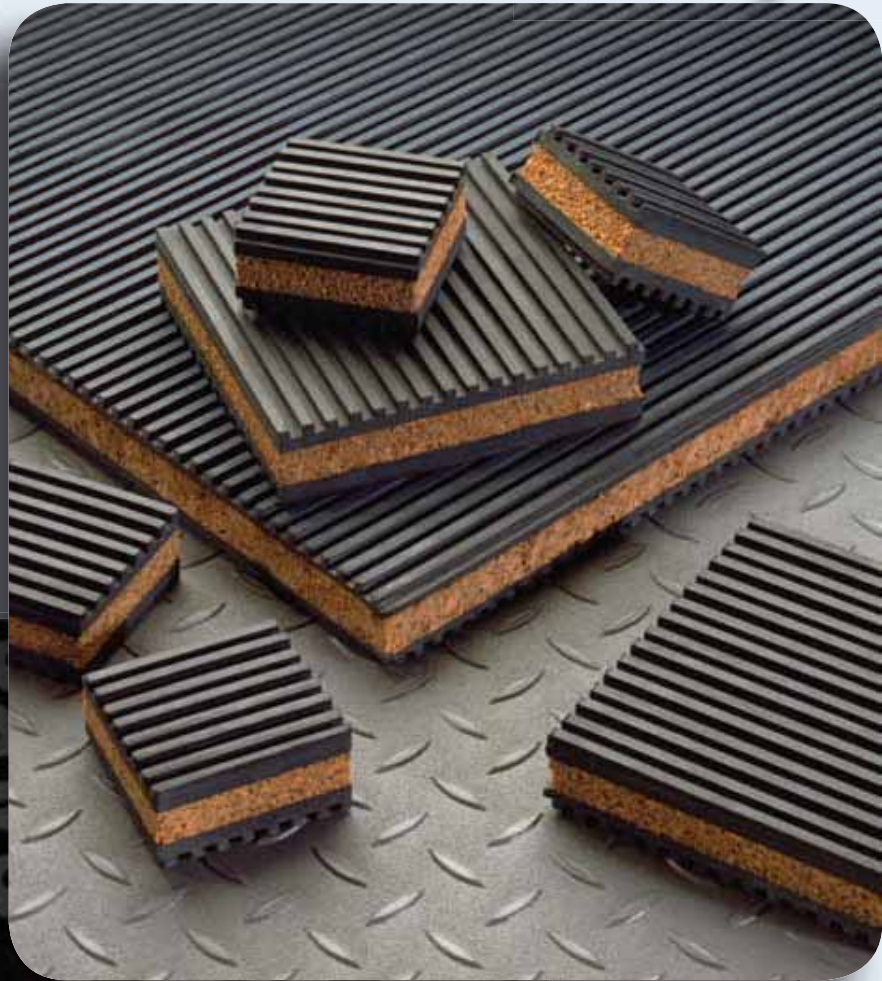

**ISO-CUBE:
Solid Rubber Tough**

Natural rubber pads designed to reduce vibration and noise emanating from refrigeration or AC equipment. Circular design offers a suction cup effect eliminating the need to bolt the pads down. A standard 18" pad divides into eighty-one 2" segments which may be cut or torn into smaller pads. The 50 durometer pads will withstand a load of 180 psi with great resiliency.

A/C Brackets

DiversiTech offers a complete selection of quality air conditioning brackets for standard and mini-split condensing units.



AIR CONDITIONING BRACKETS

These heavy duty 1/8" thick steel A/C brackets are perfect for hanging A/C condensers and heat pumps outside the home.

Hef-T-Bracket™



HEF-T-BRACKET™ TYPE 2

These brackets feature a cross bar that is attached to a wall and two L-shaped brackets that are hooked and bolted into place on the cross bar.



When operating in heat pump mode, the unit will produce condensate which is easily captured and managed using this snap on drain pan.

Hef-T-Block™



HEF-T-BLOCK™

For use as mounting bases when condensing units must be bolted down. End caps are also available for aesthetics.



Hef-T-Frame™

The flexibility of the Hef-T-Frame™ equipment support system means that "designing" is simple. It is a perfect solution for mounting any type of equipment. Simply start with a Hef-T-Frame™ Base and add as many Hef-T-Frame™ Extenders as needed to create your own system.

See pages 188-189 for more information on the Hef-T-Frame™ equipment support system.



ULTRALITE® LIGHTWEIGHT EQUIPMENT PADS

A true concrete equipment pad at the weight of plastic (about 2.5 lbs. per square foot). UltraLite® is strengthened by miles of fiber in each square foot of fiber-cement coating. This fiber allows the pad to flex instead of cracking or breaking. The textured surface prevents the condensing unit or portable generator from sliding, and allows water drainage, while the engineered encapsulated polystyrene (EPS) core prevents warping and provides a solid bottom to resist settling. Unaffected by soil conditions, ultraviolet (UV) light, temperature extremes, and other weather conditions.



UC2424-2



2" UltraLite® Pads


The 2" thick UltraLite® pad is the industry standard. Used across a wide variety of applications, unless a thicker pad (3") is required by the local building code.

CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
UC1636-2	16 X 36	11	20	250	EA	20
UC2424-2	24 X 24	15	20	323	EA	20
UC2430-2	24 X 30	17	20	361	EA	20
UC2436-2	24 X 36	22	20	455	EA	20
UC2448-2	24 X 48	18	20	385	EA	20
UC2626-2	26 X 26	17	20	365	EA	20
UC2628-2	26 X 28	19	20	397	EA	20
UC2636-2	26 X 36	21	20	446	EA	20
UC3030-2	30 X 30	21	20	441	EA	20
UC3036-2	30 X 36	27	20	571	EA	20
UC3040-2	30 X 40	30	20	617	EA	20
UC3143-2	31 X 43	26	20	551	EA	20
UC3232-2	32 X 32	24	20	501	EA	20
UC3234-2	32 X 34	23	20	485	EA	20
UC3237-2	32 X 37	28	20	579	EA	20
UC3434-2	34 X 34	23	20	493	EA	20
UC3445-2	34 X 45	45	20	915	EA	20
UC3636-2	36 X 36	27	20	555	EA	20
UC3640-2	36 X 40	29	20	608	EA	20
UC3648-2	36 X 48	35	20	725	EA	20
UC3842-2	38 X 42	30	20	625	EA	20
UC4040-2	40 X 40	32	20	644	EA	20
UC4147-2	41 X 47	39	20	805	EA	20

U.S. Patents 7,334,385; 7,232,589; 6,931,822; 6,927,183; 5,728,458; 5,664,394; 5,268,226; 5,209,968, and patents pending. ICBO PFC-5112.

3" UltraLite® Pads

Where local codes supersede the International code and require a pad thicker than 2" – 3" UltraLite® is the solution.



UC2424-3



CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
UC1636-3	16 X 36	18	15	297	EA	15
UC2424-3	24 X 24	18	15	294	EA	15
UC2430-3	24 X 30	21	15	339	EA	15
UC2436-3	24 X 36	26	15	412	EA	15
UC2442-3	24 X 42	28	15	441	EA	15
UC2448-3	24 X 48	28	15	443	EA	15
UC2626-3	26 X 26	17	15	279	EA	15
UC2636-3	26 X 36	29	15	428	EA	15
U2660-3	26 X 60	55	15	850	EA	15
UC2838-3	28 X 38	30	15	471	EA	15
UC3030-3	30 X 30	23	15	370	EA	15
UC3036-3	30 X 36	30	15	471	EA	15
UC3040-3	30 X 40	33	15	517	EA	15
UC3048-3	30 X 48	40	15	625	EA	15
U3060-3	30 X 60	63	15	970	EA	15
UC3232-3	32 X 32	26	15	411	EA	15
UC3237-3	32 X 37	27	15	436	EA	15
U3353-3	33 X 53	68	15	1,045	EA	15
UC3434-3	34 X 34	27	15	427	EA	15
UC3445-3	34 X 45	39	15	612	EA	15
U3465-3	34 X 65	71	15	1,090	EA	15
UC3636-3	36 X 36	34	15	528	EA	15
UC3642-3	36 X 42	32	15	510	EA	15
UC3648-3	36 X 48	37	15	579	EA	15
U3650-3	36 X 50	38	15	595	EA	15
U3654-3	36 X 54	71	15	1,096	EA	15
U3660-3	36 X 60	49	15	767	EA	15
U3678-3	36 X 78	99	15	1,510	EA	15
UC3842-3	38 X 42	35	15	550	EA	15
U3865-3	38 X 65	85	15	1,300	EA	15
U3870-3	38 X 70	113	15	1,720	EA	15
UC4040-3	40 X 40	34	15	510	EA	15
UC4042-3	40 X 42	36	15	565	EA	15
U4054-3	40 X 54	81	15	1,240	EA	15
UC4347-3	43 X 47	60	15	925	EA	15
U4550-3	45 X 50	81	15	1,240	EA	15
U4558-3	45 X 58	93	15	1,420	EA	15
U4848-3	48 X 48	85	15	1,300	EA	15
U4854-3	48 X 54	91	15	1,390	EA	15
U4866-3	48 X 66	108	15	1,645	EA	15
U5053-3	50 X 53	92	15	1,405	EA	15
U5056-3	50 X 56	97	15	1,480	EA	15
U5075-3	50 X 75	130	15	1,975	EA	15
U5079-3	50 X 79	145	15	2,200	EA	15
U5252-3	52 X 52	94	15	1,435	EA	15
U5260-3	52 X 60	109	15	1,660	EA	15
U5557-3	55 X 57	109	15	1,660	EA	15
U6067-3	60 X 67	134	15	2,035	EA	15

* California Earthquake Code Compliant.



Literature – Download all literature from the DiversiTech website using the Form ID shown in the icon. The URL is www.diversitech.com/literature/FORMID.pdf

ULTRALITE® LIGHTWEIGHT EQUIPMENT PADS cont'd

3" UltraLite® Wedge Pads

The new UltraLite® Wedge Pad is designed for Lennox condensing units.



UC3132-3L



CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
UC3132-3L	31 X 32	23.33	15	350	EA	15
UC3539-3L	35 X 39	33.46	15	502	EA	15
UC4044-3L	40 X 44	37.53	15	563	EA	15

UltraLite® Earthquake Code Compliant Pads

Required nearly exclusively in Southern California, the UltraLite® pad is available for compliance with strict attachment provisions detailed in earthquake prone local building codes.

UltraLite® earthquake code compliant pads are only available for sale in regions where local codes mandate installation of pads with these particular characteristics. Currently these locales include most of Southern California, portions of Washington, and portions of Oregon.



UC2424-3CA



CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
UC2424-3CA	24 X 24	14	15	241	EA	15
UC2436-3CA	24 X 36	22	15	349	EA	15
NEW UC2448-3CA	24 X 48*	28	15	443	EA	15
UC2636-3CA	26 X 36	29	15	428	EA	15
UC2838-3CA	28 X 38	26	15	411	EA	15
UC3030-3CA	30 X 30	22	15	351	EA	15
UC3036-3CA	30 X 36	25	15	400	EA	15
UC3040-3CA	30 X 40	34	15	510	EA	15
UC3232-3CA	32 X 32	24	15	381	EA	15
UC3445-3CA	34 X 45	33	15	516	EA	15
UC3636-3CA	36 X 36	28	15	441	EA	15
UC3642-3CA	36 X 42	32	15	510	EA	15
UC3648-3CA	36 X 48	37	15	579	EA	15
UC4040-3CA	40 X 40	34	15	510	EA	15

E LITE® PLASTIC EQUIPMENT PADS

E Lite's rugged design provides uniform and generous ribbing for optimum, self-leveling ground support without inserts. The result is a pad that is lightweight, but not too light. A subtle texture prevents unit slide and presents a classic appearance, which is enhanced by rounded edges and a concrete gray color. Each pad is molded with a size label and a symbol representing content of recycled material.



EL2424-2



3" E Lite® Pads

Used where local codes supersede the International code and require a pad thicker than 2".



EL5658-3



2" E Lite® Pads


The 2" thick E Lite® pad is the choice for plastic pads, unless a thicker pad (3") is required by the local building code.

CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
EL2424-2	24 X 24	7	44	333	EA	44
EL2430-2	24 X 30	9	22	219	EA	22
EL2436-2	24 X 36	11	22	256	EA	22
EL2626-2	26 X 26	8	22	205	EA	22
EL3030-2	30 X 30	11	22	265	EA	22
EL3036-2	30 X 36	13	22	313	EA	22
EL3040-2	30 X 40	15	22	346	EA	22
EL3232-2	32 X 32	13	22	300	EA	22
EL3238-2	32 X 38	15	22	351	EA	22
EL3244-2	32 X 44	17	22	401	EA	22
EL3434-2	34 X 34	14	22	350	EA	22
EL3636-2	36 X 36	16	22	373	EA	22
EL3640-2	36 X 40	18	22	410	EA	22
EL3648-2	36 X 48	29	22	663	EA	22
EL3842-2	38 X 42	19	22	470	EA	22

CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
EL1838-3	18 X 38	16	16	300	EA	16
EL2424-3	24 X 24	13	16	225	EA	16
EL2430-3	24 X 30	16	16	277	EA	16
EL2436-3	24 X 36	19	16	321	EA	16
EL3030-3	30 X 30	20	16	345	EA	16
EL3040-3	30 X 40	26	16	448	EA	16
EL3232-3	32 X 32	21	16	353	EA	16
EL3238-3	32 X 38	26	16	448	EA	16
EL3244-3	32 X 44	30	16	499	EA	16
EL3434-3	34 X 34	22	16	400	EA	16
EL3636-3	36 X 36	28	16	471	EA	16
EL3640-3	36 X 40	31	16	521	EA	16
EL3648-3	36 X 48	36	16	601	EA	16
EL3842-3	38 X 42	33	16	575	EA	16
EL3870-3	38 X 70	36	16	604	EA	16
EL4040-3	40 X 40	31	16	546	EA	16
EL4558-3	45 X 58	33	16	545	EA	16
EL4848-3	48 X 48	29	16	481	EA	16
EL4872-3	48 X 72	72	16	1,177	EA	16
EL5252-3	52 X 52	48	16	793	EA	16
EL5658-3	56 X 58	43	16	715	EA	16

CLADLITE® LIGHTWEIGHT EQUIPMENT PADS

Concrete surface and superior performance at 20% the weight of conventional concrete pads. The cladding provides superior resistance to sun, moisture and freeze-thaw conditions; the engineered encapsulated polystyrene (EPS) core is virtually impervious to water, soil conditions, fungus and bacteria. CladLite® is further strengthened by continuous steel reinforcement throughout the cladding. CladLite® is code approved for installation throughout the U.S.




2424-2



3" CladLite® Pads

Used where local codes supersede the International code and require a pad thicker than 2".



2424-3



2" CladLite® Pads

The 2" thick CladLite® pad is the choice for equipment pads, unless a thicker pad (3") is required by the local building code.

CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
1636-2	16 X 36	33	25	850	EA	25
2424-2	24 X 24	36	25	913	EA	25
2430-2	24 X 30	37	25	950	EA	25
2436-2	24 X 36	50	25	1,275	EA	25
2442-2	24 X 42	57	25	1,450	EA	25
2448-2	24 X 48	72	25	1,825	EA	25
2454-2	24 X 54	84	25	2,125	EA	25
26-2	26 Round	31	25	800	EA	25
2626-2	26 X 26	38	25	975	EA	25
2636-2	26 X 36	54	25	1,375	EA	25
2660-2	26 X 60	95	25	2,400	EA	25
2838-2	28 X 38	55	25	1,400	EA	25
30-2	30 Round	36	25	925	EA	25
3030-2	30 X 30	48	25	1,225	EA	25
3036-2	30 X 36	60	25	1,525	EA	25
3040-2	30 X 40	70	25	1,775	EA	25
3048-2	30 X 48	72	25	1,825	EA	25
3060-2	30 X 60	112	25	2,825	EA	25
3143-2	31 X 43	83	25	2,100	EA	25
32-2	32 Round	44	25	1,125	EA	25
3232-2	32 X 32	54	25	1,375	EA	25
3237-2	32 X 37	66	25	1,675	EA	25
3434-2	34 X 34	63	25	1,600	EA	25
36-2	36 Round	51	25	1,300	EA	25
3636-2	36 X 36	76	25	1,925	EA	25
3640-2	36 X 40	81	25	2,050	EA	25
3648-2	36 X 48	115	25	2,900	EA	25
3654-2	36 X 54	93	25	2,350	EA	25
3842-2	38 X 42	81	25	2,100	EA	25
4147-2	41 X 47	115	25	2,900	EA	25
4848-2	48 X 48	100	25	2,525	EA	25
5050-2	50 X 50	120	20	2,425	EA	20

NEW

U.S. Patent number 4,505,449, and patents pending. ICBO No. PFC-5112.

CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
1636-3	16 X 36	46	20	945	EA	20
2424-3	24 X 24	49	20	995	EA	20
2430-3	24 X 30	57	20	1,165	EA	20
2436-3	24 X 36	63	20	1,285	EA	20
2448-3	24 X 48	71	20	1,445	EA	20
2460-3	24 X 60	105	20	2,125	EA	20
2626-3	26 X 26	53	20	1,085	EA	20
2660-3	26 X 60	109	20	2,205	EA	20
2838-3	28 X 38	84	20	1,705	EA	20
3030-3	30 X 30	62	20	1,265	EA	20
3036-3	30 X 36	71	20	1,445	EA	20
3040-3	30 X 40	94	20	1,905	EA	20
3060-3	30 X 60	130	15	1,975	EA	15
3143-3	31 X 43	74	20	1,505	EA	20
32-3	32 Round	67	20	1,365	EA	20
3232-3	32 X 32	68	20	1,385	EA	20
3237-3	32 X 37	87	20	1,765	EA	20
3345-3	33 X 45	117	20	2,365	EA	20
3434-3	34 X 34	86	20	1,770	EA	20
3465-3	34 X 65	160	15	2,425	EA	15
36-3	36 Round	80	20	1,625	EA	20
3636-3	36 X 36	100	20	2,025	EA	20
3640-3	36 X 40	120	20	2,425	EA	20
3648-3	36 X 48	132	20	2,665	EA	20
3650-3	36 X 50	137	15	2,080	EA	15
3660-3	36 X 60	163	15	2,470	EA	15
3678-3	36 X 78	196	10	1,985	EA	10
3842-3	38 X 42	132	20	2,700	EA	20
3865-3	38 X 65	179	15	2,710	EA	15
3870-3	38 X 70	179	10	1,815	EA	10
4042-3	40 X 42	170	10	1,700	EA	10
4054-3	40 X 54	167	15	2,530	EA	15
4062-3	40 X 62	179	10	1,815	EA	10
4147-3	41 X 47	140	15	2,125	EA	15
4183-3	41 X 83	231	10	2,335	EA	10
4550-3	45 X 50	158	15	2,395	EA	15
4558-3	45 X 58	177	15	2,680	EA	15
4766-3	47 X 66	219	10	2,215	EA	10
4848-3	48 X 48	150	15	2,275	EA	15
5053-3	50 X 53	194	15	2,935	EA	15
5056-3	50 X 56	212	10	2,145	EA	10
5058-3	50 X 58	212	10	2,145	EA	10
5070-3	50 X 70	257	10	2,595	EA	10
5252-3	52 X 52	197	10	1,995	EA	10
5557-3	55 X 57	237	10	2,395	EA	10
6067-3	60 X 67	284	10	2,865	EA	10



Literature - Download all literature from the DiversiTech website using the Form ID shown in the icon. The URL is www.diversitech.com/literature/FORMID.pdf

THE HURRICANE PAD™

The Hurricane Pad™

Designed specifically for the hurricane prone regions of Florida and the Gulf Coast, The Hurricane Pad™ meets stringent local code requirements for wind resistance. Heavier than a normal concrete pad, this 4" pad provides sufficient weight to meet code. For certain taller equipment, The Hurricane T-Class Pad™ is needed. Due to their extra weight, standard freight terms only apply for shipments to Florida. All other shipments are shipped FOB Conyers, GA.



H2424-4



The Hurricane T-Class Pad™

The Hurricane T-Class Pad™ is even heavier than The Hurricane Pad™ and is designed to meet the higher wind loads of taller equipment. The taller the piece of equipment mounted to the pad, the greater the wind load on the pad. These heavier 4" pads provide sufficient weight to meet code for these taller condensing units. Due to their extra weight, standard freight terms for The Hurricane T-Class Pad™ only apply for shipments to Florida. All other shipments are shipped FOB Conyers, GA.




HT2424-4



CATALOG NO.	SIZE	PALLET QTY.	UOM	ORDER MULTIPLE
H1840-4	18 X 40	16	EA	16
H2424-4	24 X 24	16	EA	16
H2436-4	24 X 36	16	EA	16
H3030-4	30 X 30	16	EA	16
H3060-4	30 X 60	16	EA	16
H3232-4	32 X 32	16	EA	16
H3345-4	33 X 45	16	EA	16
H3434-4	34 X 34	16	EA	16
H3636-4	36 X 36	16	EA	16
H3642-4	36 X 42	16	EA	16
H3648-4	36 X 48	16	EA	16
H3652-4	36 X 52	8	EA	8
H3672-4	36 X 72	8	EA	8
H3842-4	38 X 42	16	EA	16
H3852-4	38 X 52	8	EA	8
H3865-4	38 X 65	8	EA	8
H4040-4	40 X 40	8	EA	8
H4242-4	42 X 42	8	EA	8
H4545-4	45 X 45	8	EA	8
H4558-4	45 X 58	8	EA	8
H5151-4	51 X 51	8	EA	8
H5557-4	55 X 57	8	EA	8

CATALOG NO.	SIZE	PALLET QTY.	UOM	ORDER MULTIPLE
HT2424-4	24 X 24	10	EA	10
HT2436-4	24 X 36	10	EA	10
HT3030-4	30 X 30	10	EA	10
HT3060-4	30 X 60	10	EA	10
HT3232-4	32 X 32	10	EA	10
HT3345-4	33 X 45	10	EA	10
HT3434-4	34 X 34	10	EA	10
HT3636-4	36 X 36	10	EA	10
HT3642-4	36 X 42	10	EA	10
HT3648-4	36 X 48	10	EA	10
HT3652-4	36 X 52	10	EA	10
HT3672-4	36 X 72	10	EA	10
HT3842-4	38 X 42	10	EA	10
HT3852-4	38 X 52	10	EA	10
HT3865-4	38 X 65	10	EA	10
HT4040-4	40 X 40	10	EA	10
HT4242-4	42 X 42	10	EA	10
HT4545-4	45 X 45	10	EA	10
HT4558-4	45 X 58	10	EA	10
HT5151-4	51 X 51	10	EA	10
HT5557-7	55 X 57	10	EA	10

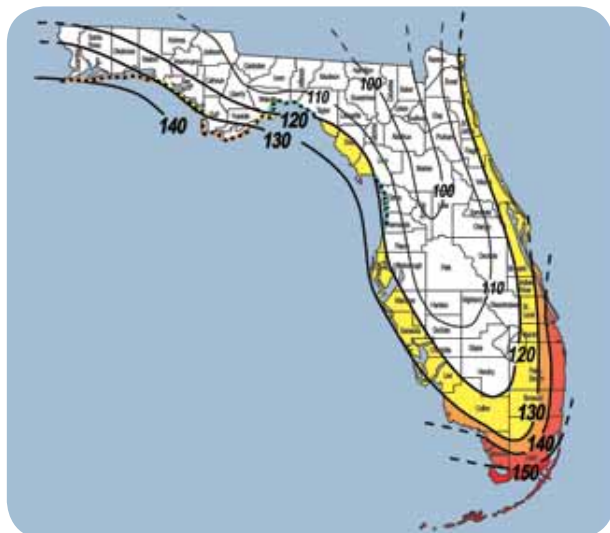

The Hurricane Pad Attachment Bracket

Bracket secures condenser to The Hurricane Pad. Use #8 self-drilling or self-tapping screws to secure condenser to brackets. Be sure to place brackets according to local building code requirements.



HC-1




CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
HC-1	The Hurricane Pad Attachment Bracket, pack of 4	PK	1
HC-1-100	The Hurricane Pad Attachment Bracket, pack of 100	PK	1

THE BLACK PAD®

The Black Pad® – 2"

The Black Pad® is an innovative equipment pad using ground, recycled rubber in a co-injection process. The pad is extremely durable, resistant to ultraviolet light, and heavier than a completely plastic pad. The Black Pad® is suitable for use with pool pumps, filters, and heaters and complies with the 1997 Standard Swimming Pool Code sections 305.2 Mounting and section 405 Equipment Foundations and Enclosures.




ACP24242



CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
ACP24242	24 X 24	10	24	240	EA	24
ACP24362	24 X 36	15	24	360	EA	24
ACP30302	30 X 30	13	24	312	EA	24
ACP32322	32 X 32	16	24	384	EA	24
ACP32442	32 X 44	23	24	552	EA	24
ACP36362	36 X 36	19	24	456	EA	24
ACP38422	38 X 42	25	24	600	EA	24

The Black Pad® – 3"

Used where local codes supersede the International code and require a pad thicker than 2".



ACP24243



CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
ACP24243	24 X 24	12	16	192	EA	16
ACP24363	24 X 36	25	16	400	EA	16
ACP28383	28 X 38	25	16	400	EA	16
ACP30303	30 X 30	20	16	320	EA	16
ACP30363	30 X 36	29	16	464	EA	16
ACP32323	32 X 32	25	16	400	EA	16
ACP32443	32 X 44	35	16	560	EA	16
ACP36363	36 X 36	23	16	368	EA	16
ACP36483	36 X 48	37	16	592	EA	16
ACP40403	40 X 40	31	16	496	EA	16
ACP52523	52 X 52	75	15	1,125	EA	15

HEF-T-PAD™

Hef-T-Pad™ – 2"

Hef-T-Pad™ is an injection molded equipment pad created from high impact polypropylene with UV inhibitors making it easy to handle, yet durable and strong. It does not require any additional equipment for moving and handling. It is resistant to impact, ultra violet degradation and weathering and will not crack, flake, or warp. The Hef-T-Pad™ is virtually impervious to climatic variations. It is drillable to permit installation of refrigerant and electrical lines under and through the pad and to allow equipment to be easily secured to the pad.



X3030211



CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
X2424211	24 X 24 X 2	6	24	208	EA	24
X2430211	24 X 30 X 2	8	24	251	EA	24
X2436211	24 X 36 X 2	10	24	290	EA	24
X3030211	30 X 30 X 2	10	24	290	EA	24
X3232211	32 X 32 X 2	11	24	312	EA	24
X3244211	32 X 44 X 2	14	24	382	EA	24
X3636211	36 X 36 X 2	13	24	367	EA	24
X3830211	38 X 30 X 2	14	24	378	EA	24
X3836211	38 X 36 X 2	14	24	376	EA	24
X3842211	38 X 42 X 2	17	24	464	EA	24

Hef-T-Pad™ – 3"

The 3" Hef-T-Pad™ shares the same great qualities of the 2" pad but works for areas that require a thicker pad to be used.



X3030311



CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
X2424311	24 X 24 X 3	9	16	200	EA	16
X2436311	24 X 36 X 3	12	16	242	EA	16
X3030311	30 X 30 X 3	13	16	264	EA	16
X3232311	32 X 32 X 3	16	EA	300	EA	16
X3238311	32 X 38 X 3	16	EA	296	EA	16
X3244311	32 X 44 X 3	14	EA	273	EA	16
X3636311	36 X 36 X 3	17	EA	319	EA	16
X3848311	38 X 48 X 3	24	EA	428	EA	16
X5055301	50 X 55 X 3	42	EA	724	EA	16
X2600311	26 X 3 Round	9	EA	194	EA	16



Literature - Download all literature from the DiversiTech website using the Form ID shown in the icon. The URL is www.diversitech.com/literature/FORMID.pdf

ENVIROPAD™

EnviroPad™ – 2"

An injection molded equipment pad created from 100% recycled materials to minimize environmental impact. It does not require any additional equipment for moving and handling. EnviroPad™ is resistant to impact, ultra-violet degradation and weathering (virtually impervious to climatic variations), and will not crack, flake, or warp. Drillable to permit installation of refrigerant and electrical lines under and through the pad and to allow equipment to easily secure to the pad.



EnviroPad™ – 3"

The 3" EnviroPad™ shares the same great qualities of the 2" pad but works for areas that require a thicker pad to be used.



CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
EP2424-2	24 X 24 X 2	6	24	208	EA	24
EP3030-2	30 X 30 X 2	10	24	290	EA	24
EP3232-2	32 X 32 X 2	11	24	312	EA	24
EP3244-2	32 X 44 X 2	14	24	382	EA	24
EP3636-2	36 X 36 X 2	13	24	367	EA	24
EP3842-2	38 X 42 X 2	17	24	450	EA	24

CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
EP2424-3	24 X 24 X 3	9	16	200	EA	16
EP3030-3	30 X 30 X 3	13	16	264	EA	16
EP3232-3	32 X 32 X 3	16	16	300	EA	16
EP3244-3	32 X 44 X 3	14	16	273	EA	16
EP3636-3	36 X 36 X 3	17	16	319	EA	16
EP3848-3	36 X 36 X 3	24	16	378	EA	16

HEAT PUMP PADS

Heat Pump Pad™

Provides an effective base for heat pump equipment installed in snowy climates. Rather than a combination of a typical 2" (or 3") equipment pad and 6" heat pump risers, the Heat Pump Pad™ provides a full 8" of elevation in a simple 36" by 36" footprint. The star pattern of the integral risers allows for installation of equipment with different size footprints up to 36" X 36". Also included are eight anti-vibration pads uniquely designed to fit into the guide slots on the top of the integral risers. The base is sloped outward to allow for easy drainage of condensate or defrost cycle condensate when the outdoor coil is operating in heat pump mode. Nestable for efficient shipping, transportation, and warehousing. Injection molded from concrete gray, recycled polypropylene material, the Heat Pump Pad™ is environmentally friendly and designed to last longer than the equipment it supports. Patent(s) pending.





CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
HP3636-8	36 X 36 X 8	16	16	264	EA	16

HEATER PADS

Heater Pad

A heavy duty version of an all concrete pad designed specifically for pool heater and filter applications. Due to their extra weight, standard freight terms for Heater Pads only apply for shipments to Georgia and Florida. All other shipments are shipped FOB Conyers, Georgia.



CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
LF2436-2	24 X 36 X 2	66	20	1,345	EA	20
LF3030-2	30 X 30 X 2	73	20	1,485	EA	20
LF3036-2	30 X 36 X 2	89	20	1,805	EA	20
LF3636-2	36 X 36 X 2	120	15	1,825	EA	15
LF2436-3	24 X 36 X 3	88	15	1,345	EA	15
LF3030-3	30 X 30 X 3	92	15	1,430	EA	15
LF3636-3	36 X 36 X 3	170	10	1,725	EA	10

HEAT PUMP RISERS

Heat Pump Risers


Sturdy and stable, DiversiTech's Heat Pump Riser provides the desired elevation for condensers, heat pumps, and air handlers. The one-piece, heavy-duty plastic unit is manufactured in three heights. Butyl mastic on the top and bottom guarantees no slipping and reduced vibration and noise. Available in 1 or 2 piece risers.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
HPR-3	Riser – 3"	EA	48
HPR-6	Riser – 6"	EA	36
HPR-12	Riser – 12"	EA	16
HPR-3-2P	Two Piece Riser – 3"	EA	32
HPR-6-2P	Two Piece Riser – 6"	EA	16
HPR-3-2PG	Two Piece Dark Gray Riser – 3"	EA	32
HPR-6-2PG	Two Piece Dark Gray Riser – 6"	EA	16
HPR-EXT	4" Extension	EA	28

Furnace Mounting Blocks


Each furnace mounting block can support 40% more weight than competitive products – over 500 pounds! Easy peel and stick installation.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
FB-1	Furnace Mounting Block	EA	72

AIR HANDLER BASE

Air Handler Base – Heavy-duty Adjustable



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-HAB-BG	Black Steel Air Handler Base	EA	1

Heat Pump Riser – Structural

NEW!


HPR-6S is a patent pending structural heat pump riser engineered to deliver sturdy and stable elevation for condensers, heat pumps, and air handlers. The one-piece light weight polymer unit is precision injection molded in a new computer generated geometric design. Butyl mastic included on the top and bottom guarantee no slipping and reduced vibration and noise.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
HPR-6S	Heat Pump Riser – Structural	EA	36

Air Handler Block

Lightweight styrofoam block (concrete gray) provides A/C air handler support in attic installations.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
7-60	Air Handler Block 8" x 8" x 4"	EA	144
7-64	Air Handler Block 8" x 8" x 4" – pack of 4	PK	4

MOUNTING BRACKETS, BLOCKS

Air Conditioner Brackets

These heavy duty 1/8" thick steel AC brackets are perfect for hanging A/C condensers and heat pumps outside the home. Mount at any height to allow for easy maintenance under units. No need to wait for finished grade or landscaping prior to installation of AC unit. Pre-punched holes for easy installation. Powder coated gray finish. Load rating 600 lbs. per pair.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
ACB-30	AC Mounting Bracket - 30", pack of 2	PK	1
ACB-36	AC Mounting Bracket - 36", pack of 2	PK	1
ACB-42	AC Mounting Bracket - 42", pack of 2	PK	1
ACB-48	AC Mounting Bracket - 48", pack of 2	PK	1

Hef-T-Bracket™ (Type 2)

Used for supporting condensing units, Hef-T-Brackets (Type 2) feature a cross bar that is attached to a wall, and two L-shaped brackets that are hooked and bolted into place on the cross bar. The condensing unit is mounted onto the L-shaped brackets, and fastened using the bolts and anti-vibration washers provided.



CATALOG NO.	DESCRIPTION	ARM LENGTH	LOAD RATING PER ARM	UOM	ORDER MULTIPLE
230-B2M	Hef-T-Bracket™ (Type 2) - Medium	18"	165#	EA	1
230-B2L	Hef-T-Bracket™ (Type 2) - Large	21"	220#	EA	1

Hef-T-Block™

Used as mounting bases when condensing units must be bolted down. Available in three lengths. End caps are also available for aesthetics. Furnished complete with mounting bolts. Maximum load capacity is 900 pounds per mounting block. Installation temperature range from -4F (-20C) to 140F (60C). Hef-T-Blocks fit all mini-split condensing units with a unique sliding rail feature.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
230-MB14W	14" Hef-T-Block™ (White), pack of 2	PK	1
230-MB17W	17" Hef-T-Block™ (White), pack of 2	PK	1
230-MB36W	36" Hef-T-Block™ (White), pack of 2	PK	1
230-MBCW	Hef-T-Block™ End Cap (White), pack of 4	PK	1

Hef-T-Bracket™ (Type 3)

Used for supporting condensing units, Hef-T-Brackets (Type 3), just like Hef-T-Brackets (Type 2), feature a cross bar that is attached to a wall, and two L-shaped brackets that are hooked and bolted into place on the cross bar. The condensing unit is mounted onto the L-shaped brackets, and fastened using the bolts and anti-vibration washers provided.

The Hef-T-Bracket™ (Type 3) features an innovative locking mechanism called Easy-Fit™. Easy-Fit™ enables the arms to be joined to the uprights in a matter of seconds. A spring-lock automatically secures the joint, preventing the arms from being dislodged accidentally. All brackets are furnished complete with an integral bubble level to make correct installation of the crossbar easier.




CATALOG NO.	DESCRIPTION	ARM LENGTH	LOAD RATING PER ARM	UOM	ORDER MULTIPLE
230-B3M	Hef-T-Bracket™ (Type 3) - Medium	19"	100#	EA	1
230-B3L	Hef-T-Bracket™ (Type 3) - Large	21"	150#	EA	1

ANTI-VIBRATION PADS

E.V.A. Anti-Vibration Pad


The latest generation in vibration dampening technology. The most effective vibration dampening pad available on the market. The EVA Pad was tested against other pads at four different vibration settings. In the most severe vibration extremes, the EVA Pad outperforms cork and rubber by a margin of greater than 3:1! This is due to the special composite foam center which is much more structurally sound than cork. It is not affected by oils or chemicals that can break down cork and is much more effective at vibration dampening than solid rubber. All this at a very competitive price. Designed to withstand 50 psi.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
MP-2E	2" x 2" x 7/8" E.V.A. Pad	EA	48
MP-3E	3" x 3" x 7/8" E.V.A. Pad	EA	36
MP-4E	4" x 4" x 7/8" E.V.A. Pad	EA	24
MP-6E	6" x 6" x 7/8" E.V.A. Pad	EA	24
MP-12E	12" x 12" x 7/8" E.V.A. Pad	EA	12
MP-18E	18" x 18" x 7/8" E.V.A. Pad	EA	6

Rubber/Cork Anti-Vibration Pad

Highest quality elastomeric oil resistant padding. Designed to withstand 50 psi. The rubber pads are corrugated on both sides. The cork is laminated between two corrugated pads. Ideal for air conditioners, compressors, cooling towers, presses, machines, etc.




CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
MP-2C	2" x 2" x 7/8" Rubber/Cork	EA	48
MP-3C	3" x 3" x 7/8" Rubber/Cork	EA	36
MP-4C	4" x 4" x 7/8" Rubber/Cork	EA	24
MP-6C	6" x 6" x 7/8" Rubber/Cork	EA	24
MP-8C	8" x 8" x 7/8" Rubber/Cork	EA	12
MP-12C	12" x 12" x 7/8" Rubber/Cork	EA	12
MP-18C	18" x 18" x 7/8" Rubber/Cork	EA	6

ANTI-VIBRATION PADS cont'd

Rubber Anti-Vibration Pad

Highest quality elastomeric oil resistant padding. Designed to withstand 50 lbs. psi. The rubber pads are corrugated on both sides. Ideal for air conditioners, compressors, cooling towers, presses, machines, etc.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
MP-2	2" x 2" x 3/8" Rubber	EA	48
MP-3	3" x 3" x 3/8" Rubber	EA	36
MP-4	4" x 4" x 3/8" Rubber	EA	24
MP-6	6" x 6" x 3/8" Rubber	EA	24
MP-8	8" x 8" x 3/8" Rubber	EA	12
MP-12	12" x 12" x 3/8" Rubber	EA	12
MP-18	18" x 18" x 3/8" Rubber	EA	6

Iso-Cube Economy Anti-Vibration Pad

Natural rubber pads, designed to reduce vibration and noise emanating from refrigeration and air conditioning equipment. The circular design in each pad offers a suction cup effect, which eliminates the need to bolt the pads down. A standard 18" (46cm) pad is divided into eighty-one 2" (5cm) segments, each of which may be cut or torn to provide smaller pads. These 50 durometer pads will withstand a load of 180 psi with greater resiliency.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
ISO-2	2" x 2" x 3/4" Iso-Cube	EA	24
ISO-4	4" x 4" x 3/4" Iso-Cube	EA	12
ISO-18	18" x 18" x 3/4" Iso-Cube	EA	6

Silent Support Anti-Vibration Pad

Silent Support is DiversiTech's recycled rubber anti-vibration pad. When placed under highly vibration prone equipment, it will absorb much of the energy and prevent most unwanted noise. If the equipment needs to be slightly raised, the Silent Support can form an interlocking stack.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
MP-6S	6"W x 6"L x 1-1/2"H Recycled Rubber, pack of 4	PK	4



Literature - Download all literature from the DiversiTech website using the Form ID shown in the icon. The URL is www.diversitech.com/literature/FORMID.pdf