



Air Conditioning & Heating

GSZ13

ENERGY-EFFICIENT R-410A

SPLIT SYSTEM HEAT PUMP

1½ TO 5 TONS

COOLING CAPACITY: 17,400 TO 57,000 BTU/H

HEATING CAPACITY: 17,000 TO 58,000 BTU/H



Contents

Nomenclature.....	2
Product Specifications.....	3
Expanded Cooling Data	4
Expanded Heating Data.....	18
AHRI Ratings	20
Wiring Diagram.....	27
Dimensions	28
Accessories	28

Standard Features

- R-410A chlorine-free refrigerant
- High-efficiency scroll compressor
- SmartShift® technology to ensure quiet reliable defrost
- Factory-installed bi-flow liquid-line filter drier
- Factory-installed suction-line accumulator
- Factory-installed compressor crankcase heater
- Factory-installed high-capacity muffler
- High- and low-pressure switches
- Service valves with sweat connections and easy access to gauge ports
- Copper tube/enhanced aluminum fin coil
- Fully charged for 15' of tubing length
- Contactor with lug connection
- Ground lug connection
- AHRI Certified; ETL Listed


Cabinet Features

- Goodman® brand sound control top design
- Steel louver coil guard
- Heavy-gauge galvanized-steel cabinet
- Attractive Architectural Gray powder-paint finish with 500-hour salt-spray approval
- Top and side maintenance access
- Service ports and controls are accessible while unit is operating
- When properly anchored, meets the 2010 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)



* Complete warranty details available from your local dealer or at www.goodmanmfg.com. To receive the 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Quebec.

NOMENCLATURE

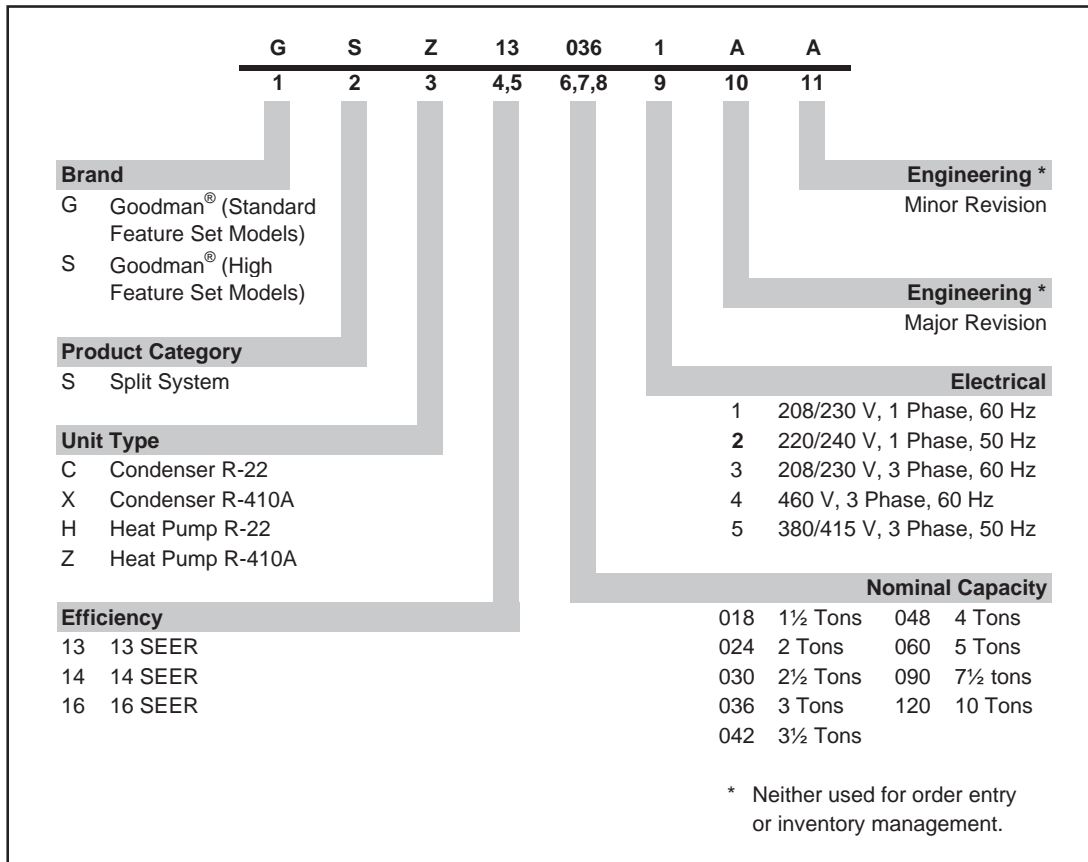

SPECIFICATIONS

	GSZ13 0181A*	GSZ13 0241B*	GSZ13 0301A*	GSZ13 0361B*	GSZ13 0421A*	GSZ13 0481A*	GSZ13 0601A*
NOMINAL CAPACITIES							
Cooling (BTU/h)	18,000	24,000	30,000	36,000	42,000	48,000	60,000
Heating (BTU/h)	18,000	24,000	30,000	36,000	42,000	48,000	60,000
Decibels	71	73	72	74	74	76	75
COMPRESSOR							
RLA	9.0	13.5	14.1	16.7	17.9	19.9	26.4
LRA	48.0	58.3	73.0	79.0	112.0	109.0	134.0
Type	Scroll	Scroll	Scroll	Scroll	Scroll	Scroll	Scroll
CONDENSER FAN MOTOR							
Horsepower	1/6	1/4	1/6	1/4	1/4	1/4	1/4
FLA	0.70	0.70	1.10	1.50	1.50	1.50	1.50
REFRIGERATION SYSTEM							
Refrigerant Line Size ¹							
Liquid Line Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Line Size ("O.D.)	3/4"	3/4"	3/4"	7/8"	1 1/8"	1 1/8"	1 1/8"
Refrigerant Connection Size							
Liquid Valve Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Valve Size ("O.D.)	3/4"	3/4"	3/4"	3/4"	7/8"	7/8"	7/8"
Valve Connection Type	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat
Refrigerant Charge	109	99	124	128	149	204	231
Shipped with Orifice Size	0.051	0.057	0.065	0.071	0.074	0.078	0.088
ELECTRICAL DATA							
Volts-Hz	208/230-60	208/230-60	208/230-60	208/230-60	208/230-60	208/230-60	208/230-60
Minimum Circuit Ampacity ²	12.4	17.5	18.7	22.4	23.9	26.4	34.5
Max. Overcurrent Protection ³	20	30	30	35	40	45	60
Min / Max Volts	197 / 253	197 / 253	197 / 253	197 / 253	197 / 253	197 / 253	197 / 253
Electrical Conduit Size	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"
EQUIPMENT WEIGHT (LBS)							
	145	136	142	156	202	219	268
SHIP WEIGHT (LBS)							
	162	153	159	174	220	237	290

¹ Tested and rated in accordance with ARI Standard 210/240

² Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes

³ Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

NOTES

- Always check the S&R plate for electrical data on the unit being installed.
- Installer will need to supply 3/8" to 1 1/8" adapters for suction line connections.
- Unit is charged with refrigerant for 15' of 3/8" liquid line. System charge must be adjusted per Installation Instructions Final Charge Procedure.
- Installation of these units requires the specified TXV Kit to be installed on the indoor coil. THE SPECIFIED TXV IS DETERMINED BY THE OUTDOOR UNIT NOT THE INDOOR COIL.

COOLING DATA — GSZ130181A* / AR*F182416**

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																								
		65°F				75°F				85°F				95°F				105°F				115°F				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
70	675	MBh	17.1	17.7	19.4	-	16.7	17.3	18.9	-	16.3	16.9	18.5	-	15.9	16.4	18.0	-	15.1	15.6	17.1	-	14.0	14.5	15.9	-
		S/T	0.74	0.62	0.43	-	0.77	0.64	0.45	-	0.79	0.66	0.46	-	0.82	0.68	0.47	-	0.85	0.71	0.49	-	0.85	0.71	0.49	-
		ΔT	17	15	11	-	17	15	11	-	17	15	11	-	18	15	12	-	17	15	11	-	16	14	11	-
		KW	1.25	1.27	1.31	-	1.34	1.37	1.41	-	1.42	1.45	1.50	-	1.49	1.52	1.57	-	1.55	1.59	1.64	-	1.61	1.64	1.69	-
		Amps	4.5	4.6	4.8	-	4.9	5.0	5.2	-	5.3	5.4	5.6	-	5.7	5.8	6.0	-	6.0	6.2	6.4	-	6.4	6.5	6.8	-
		Hi PR	225	242	255	-	252	271	287	-	287	309	326	-	327	352	371	-	367	395	418	-	406	437	461	-
	Lo PR	109	116	126	-	115	122	133	-	119	127	139	-	125	133	146	-	131	140	152	-	136	144	158	-	
	600	MBh	16.6	17.2	18.8	-	16.2	16.8	18.4	-	15.8	16.4	17.9	-	15.4	16.0	17.5	-	14.6	15.2	16.6	-	13.6	14.0	15.4	-
		S/T	0.71	0.59	0.41	-	0.73	0.61	0.43	-	0.75	0.63	0.44	-	0.78	0.65	0.45	-	0.81	0.67	0.47	-	0.81	0.68	0.47	-
		ΔT	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	17	15	11	-
		KW	1.24	1.26	1.30	-	1.33	1.36	1.40	-	1.41	1.44	1.48	-	1.48	1.51	1.56	-	1.54	1.57	1.62	-	1.59	1.63	1.68	-
		Amps	4.5	4.6	4.7	-	4.8	4.9	5.1	-	5.2	5.4	5.6	-	5.6	5.7	5.9	-	6.0	6.1	6.3	-	6.3	6.5	6.7	-
Hi PR		222	239	253	-	250	269	284	-	284	306	323	-	323	348	368	-	364	392	413	-	402	433	457	-	
Lo PR	108	114	125	-	114	121	132	-	118	126	137	-	124	132	144	-	130	138	151	-	134	143	156	-		
525	MBh	15.3	15.8	17.4	-	14.9	15.5	16.9	-	14.6	15.1	16.5	-	14.2	14.7	16.1	-	13.5	14.0	15.3	-	12.5	13.0	14.2	-	
	S/T	0.68	0.57	0.40	-	0.71	0.59	0.41	-	0.73	0.61	0.42	-	0.75	0.63	0.43	-	0.78	0.65	0.45	-	0.78	0.66	0.45	-	
	ΔT	18	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	18	16	12	-	17	15	11	-	
	KW	1.21	1.23	1.27	-	1.30	1.32	1.36	-	1.38	1.40	1.45	-	1.44	1.47	1.52	-	1.50	1.53	1.58	-	1.55	1.59	1.64	-	
	Amps	4.3	4.5	4.6	-	4.7	4.8	5.0	-	5.1	5.2	5.4	-	5.5	5.6	5.8	-	5.8	5.9	6.1	-	6.1	6.3	6.5	-	
	Hi PR	216	232	245	-	242	261	275	-	275	296	313	-	314	338	356	-	353	380	401	-	390	420	443	-	
Lo PR	104	111	121	-	110	117	128	-	115	122	133	-	120	128	140	-	126	134	146	-	130	139	151	-		
75	675	MBh	17.34	17.85	19.32	20.74	16.94	17.44	18.87	20.26	16.53	17.02	18.43	19.78	16.13	16.61	17.98	19.29	15.32	15.78	17.08	18.33	14.19	14.61	15.82	16.98
		S/T	0.84	0.76	0.57	0.37	0.88	0.78	0.59	0.38	0.90	0.80	0.61	0.39	0.93	0.83	0.63	0.40	0.96	0.86	0.65	0.42	0.97	0.87	0.66	0.42
		ΔT	20	18	15	10	20	19	15	11	20	19	15	11	20	19	15	11	20	18	15	10	19	17	14	10
		KW	1.26	1.28	1.32	1.36	1.35	1.38	1.42	1.46	1.43	1.46	1.51	1.56	1.50	1.54	1.58	1.64	1.57	1.60	1.65	1.70	1.62	1.65	1.71	1.76
		Amps	4.6	4.7	4.8	5.0	4.9	5.0	5.2	5.4	5.3	5.5	5.7	5.9	5.7	5.9	6.0	6.3	6.1	6.2	6.4	6.7	6.4	6.6	6.8	7.1
		Hi PR	227	244	258	269	255	274	289	302	290	312	329	343	330	355	375	391	371	399	422	440	410	441	466	486
	Lo PR	110	117	127	136	116	123	135	143	120	128	140	149	127	135	147	157	133	141	154	164	137	146	159	170	
	600	MBh	16.8	17.3	18.8	20.1	16.4	16.9	18.3	19.7	16.1	16.5	17.9	19.2	15.7	16.1	17.5	18.7	14.9	15.3	16.6	17.8	13.8	14.2	15.4	16.5
		S/T	0.81	0.72	0.55	0.35	0.84	0.75	0.57	0.36	0.86	0.77	0.58	0.37	0.88	0.79	0.60	0.38	0.92	0.82	0.62	0.40	0.93	0.83	0.63	0.40
		ΔT	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	20	18	15	10
		KW	1.25	1.27	1.31	1.35	1.34	1.37	1.41	1.45	1.42	1.45	1.50	1.54	1.49	1.52	1.57	1.62	1.55	1.59	1.64	1.69	1.61	1.64	1.69	1.75
		Amps	4.5	4.6	4.8	4.9	4.9	5.0	5.2	5.3	5.3	5.4	5.6	5.8	5.7	5.8	6.0	6.2	6.0	6.2	6.4	6.6	6.4	6.5	6.8	7.0
Hi PR		225	242	255	266	252	271	287	299	287	309	326	340	327	352	371	387	368	396	418	436	406	437	461	481	
Lo PR	109	116	126	134	115	122	133	142	119	127	139	148	125	133	146	155	131	140	153	162	136	145	158	168		
525	MBh	15.5	16.0	17.3	18.6	15.2	15.6	16.9	18.2	14.8	15.3	16.5	17.7	14.5	14.88	16.1	17.3	13.7	14.1	15.3	16.4	12.7	13.1	14.2	15.2	
	S/T	0.78	0.69	0.53	0.34	0.81	0.72	0.55	0.35	0.83	0.74	0.56	0.36	0.85	0.76	0.58	0.37	0.88	0.79	0.60	0.39	0.89	0.80	0.60	0.39	
	ΔT	21	19	16	11	21	20	16	11	21	20	16	11	22	20	16	11	21	20	16	11	20	18	15	10	
	KW	1.22	1.24	1.28	1.32	1.31	1.33	1.38	1.42	1.39	1.42	1.46	1.51	1.46	1.49	1.53	1.58	1.51	1.55	1.60	1.65	1.57	1.60	1.65	1.71	
	Amps	4.4	4.5	4.6	4.8	4.7	4.9	5.0	5.2	5.2	5.3	5.5	5.7	5.5	5.6	5.8	6.0	5.9	6.0	6.2	6.4	6.2	6.4	6.6	6.8	
	Hi PR	218	235	248	258	245	263	278	290	278	299	316	330	317	341	360	376	357	384	405	423	394	424	448	467	
Lo PR	105	112	122	130	111	118	129	138	116	123	134	143	122	129	141	150	127	136	148	158	132	140	153	163		

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects ACCA (TVA) Rating Conditions
 KW = Total system power
 Amps = Outdoor unit amps (compressor + fan)

COOLING DATA — GSZ130241B*/AR*F182416**

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																								
		65°F				75°F				85°F				95°F				105°F				115°F				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
70	900	MBh	22.5	23.4	25.6	-	22.0	22.8	25.0	-	21.5	22.3	24.4	-	21.0	21.7	23.8	-	19.9	20.6	22.6	-	18.4	19.1	21.0	-
		S/T	0.75	0.63	0.44	-	0.78	0.65	0.45	-	0.80	0.67	0.46	-	0.83	0.69	0.48	-	0.86	0.72	0.50	-	0.86	0.72	0.50	-
		ΔT	17	15	11	-	18	15	12	-	18	15	12	-	18	15	12	-	17	15	11	-	16	14	11	-
		KW	1.63	1.66	1.71	-	1.75	1.78	1.84	-	1.85	1.89	1.95	-	1.95	1.99	2.05	-	2.03	2.07	2.14	-	2.10	2.14	2.21	-
		Amps	6.1	6.2	6.4	-	6.5	6.7	6.9	-	7.1	7.3	7.5	-	7.6	7.8	8.0	-	8.1	8.3	8.5	-	8.5	8.8	9.0	-
		Hi/Pr	228	246	259	-	256	276	291	-	291	314	331	-	332	357	377	-	373	402	424	-	413	444	469	-
	Lo/Pr	103	110	120	-	109	116	127	-	114	121	132	-	119	127	139	-	125	133	145	-	129	138	150	-	
	800	MBh	21.9	22.7	24.8	-	21.4	22.2	24.3	-	20.9	21.6	23.7	-	20.4	21.1	23.1	-	19.3	20.0	22.0	-	17.9	18.6	20.3	-
		S/T	0.72	0.60	0.42	-	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.79	0.66	0.46	-	0.82	0.68	0.47	-	0.82	0.69	0.48	-
		ΔT	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	17	15	11	-
		KW	1.62	1.65	1.70	-	1.74	1.77	1.83	-	1.84	1.88	1.94	-	1.93	1.97	2.04	-	2.01	2.05	2.12	-	2.08	2.12	2.19	-
		Amps	6.0	6.2	6.3	-	6.5	6.6	6.9	-	7.0	7.2	7.4	-	7.5	7.7	8.0	-	8.0	8.2	8.5	-	8.5	8.7	9.0	-
Hi/Pr		226	243	257	-	254	273	288	-	288	310	328	-	329	354	373	-	370	398	420	-	408	440	464	-	
Lo/Pr	102	109	119	-	108	115	126	-	112	120	131	-	118	126	137	-	124	132	144	-	128	136	149	-		
700	MBh	20.2	20.9	22.9	-	19.7	20.4	22.4	-	19.3	20.0	21.9	-	18.8	19.5	21.3	-	17.8	18.5	20.3	-	16.5	17.1	18.8	-	
	S/T	0.69	0.58	0.40	-	0.72	0.60	0.42	-	0.74	0.61	0.43	-	0.76	0.63	0.44	-	0.79	0.66	0.46	-	0.80	0.66	0.46	-	
	ΔT	18	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	18	16	12	-	17	15	11	-	
	KW	1.58	1.61	1.66	-	1.69	1.73	1.78	-	1.80	1.83	1.89	-	1.89	1.93	1.99	-	1.96	2.00	2.07	-	2.03	2.07	2.14	-	
	Amps	5.9	6.0	6.2	-	6.3	6.5	6.7	-	6.8	7.0	7.2	-	7.3	7.5	7.7	-	7.8	8.0	8.2	-	8.2	8.4	8.7	-	
	Hi/Pr	219	236	249	-	246	265	280	-	280	301	318	-	319	343	362	-	359	386	407	-	396	426	450	-	
Lo/Pr	99	106	115	-	105	112	122	-	109	116	127	-	115	122	133	-	120	128	139	-	124	132	144	-		
75	900	MBh	22.92	23.60	25.54	27.41	22.39	23.05	24.95	26.78	21.85	22.50	24.36	26.14	21.32	21.95	23.76	25.50	20.25	20.85	22.57	24.23	18.76	19.32	20.91	22.44
		S/T	0.86	0.77	0.58	0.37	0.89	0.79	0.60	0.39	0.91	0.81	0.62	0.40	0.94	0.84	0.64	0.41	0.97	0.87	0.66	0.42	0.98	0.88	0.67	0.43
		ΔT	20	18	15	10	20	19	15	11	20	19	15	11	20	19	15	11	20	19	15	11	19	17	14	10
		KW	1.64	1.67	1.73	1.78	1.76	1.80	1.85	1.91	1.87	1.91	1.97	2.03	1.96	2.01	2.07	2.14	2.04	2.09	2.16	2.23	2.11	2.16	2.23	2.30
		Amps	6.1	6.3	6.5	6.7	6.6	6.8	7.0	7.2	7.2	7.3	7.6	7.9	7.7	7.8	8.1	8.4	8.1	8.3	8.6	8.9	8.6	8.8	9.1	9.5
		Hi/Pr	231	248	262	273	259	279	294	307	294	317	334	349	335	361	381	397	377	406	429	447	417	448	474	494
	Lo/Pr	104	111	121	129	110	117	128	137	115	122	133	142	121	128	140	149	126	134	147	156	131	139	152	162	
	800	MBh	22.3	22.9	24.8	26.6	21.7	22.4	24.2	26.0	21.2	21.8	23.6	25.4	20.7	21.3	23.1	24.8	19.7	20.2	21.9	23.5	18.2	18.8	20.3	21.8
		S/T	0.82	0.73	0.55	0.36	0.85	0.76	0.57	0.37	0.87	0.78	0.59	0.38	0.90	0.80	0.61	0.39	0.93	0.83	0.63	0.40	0.94	0.84	0.63	0.41
		ΔT	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	20	18	15	10
		KW	1.63	1.66	1.71	1.77	1.75	1.79	1.84	1.90	1.85	1.89	1.95	2.02	1.95	1.99	2.05	2.12	2.03	2.07	2.14	2.21	2.10	2.14	2.21	2.28
		Amps	6.1	6.2	6.4	6.6	6.5	6.7	6.9	7.2	7.1	7.3	7.5	7.8	7.6	7.8	8.0	8.3	8.1	8.3	8.5	8.9	8.5	8.8	9.0	9.4
Hi/Pr		228	246	260	271	256	276	291	304	291	314	331	345	332	357	377	393	373	402	424	443	413	444	469	489	
Lo/Pr	103	110	120	128	109	116	127	135	114	121	132	141	119	127	139	148	125	133	145	155	129	138	150	160		
700	MBh	20.5	21.1	22.9	24.6	20.1	20.7	22.4	24.0	19.6	20.2	21.8	23.4	19.1	19.7	21.3	22.9	18.2	18.7	20.2	21.7	16.8	17.3	18.7	20.1	
	S/T	0.79	0.70	0.53	0.34	0.82	0.73	0.55	0.36	0.84	0.75	0.57	0.36	0.86	0.77	0.58	0.38	0.90	0.80	0.61	0.39	0.90	0.81	0.61	0.39	
	ΔT	21	20	16	11	22	20	16	11	22	20	16	11	22	20	16	11	21	20	16	11	20	18	15	10	
	KW	1.59	1.62	1.67	1.72	1.71	1.74	1.80	1.85	1.81	1.85	1.91	1.97	1.90	1.94	2.00	2.07	1.98	2.02	2.09	2.15	2.05	2.09	2.16	2.23	
	Amps	5.9	6.0	6.2	6.5	6.4	6.5	6.7	7.0	6.9	7.1	7.3	7.6	7.4	7.6	7.8	8.1	7.8	8.0	8.3	8.6	8.3	8.5	8.8	9.1	
	Hi/Pr	222	238	252	263	249	267	282	295	283	304	321	335	322	346	366	382	362	390	412	429	400	431	455	474	
Lo/Pr	100	107	117	124	106	113	123	131	110	117	128	136	116	123	134	143	121	129	141	150	125	133	146	155		

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects ACCA (TVA) Rating Conditions
 KW = Total system power
 Amps = Outdoor unit amps (compressor + fan)

COOLING DATA — GSZ130241B*/AR*F182416** (CONT.)

IDB		OUTDOOR AMBIENT TEMPERATURE																																															
		65°F								75°F								85°F								95°F								105°F								115°F							
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71																
900		ENTERING INDOOR WET BULB TEMPERATURE																																															
		23.33	23.84	25.47	27.22	22.79	23.28	24.87	26.59	22.24	22.73	24.28	25.96	21.70	22.17	23.69	25.32	20.62	21.07	22.51	24.06	19.10	19.51	20.85	22.29	19.10	19.51	20.85	22.29																				
900		MbH	0.94	0.88	0.72	0.54	1.00	0.91	0.74	0.56	1.00	0.94	0.76	0.57	1.00	0.97	0.79	0.59	1.00	1.00	0.82	0.61	1.00	1.00	0.82	0.61	1.00	1.00	0.82	0.61																			
		S/T	22	21	19	15	23	22	19	15	23	22	19	15	22	22	19	15	21	22	19	15	20	20	18	14	20	20	18	14																			
900		ΔT	1.65	1.69	1.74	1.79	1.78	1.81	1.87	1.93	1.88	1.92	1.98	2.05	1.98	2.02	2.09	2.15	2.06	2.11	2.17	2.24	2.13	2.18	2.25	2.32	2.13	2.18	2.25	2.32																			
		KW	6.2	6.3	6.5	6.8	6.7	6.8	7.0	7.3	7.2	7.4	7.7	7.9	7.7	7.9	8.2	8.5	8.2	8.4	8.7	9.0	8.7	8.9	9.2	9.6	8.7	8.9	9.2	9.6																			
900		Amps	233	251	265	276	261	281	297	310	297	320	338	352	339	364	385	401	381	410	433	452	421	453	478	499	421	453	478	499																			
		Hi Pr	106	112	123	131	112	119	130	138	116	123	135	143	122	130	141	151	128	136	148	158	132	140	153	163	132	140	153	163																			
80		Lo Pr	22.6	23.1	24.7	26.4	22.1	22.6	24.2	25.8	21.6	22.1	23.6	25.2	21.1	21.5	23.0	24.6	20.0	20.5	21.9	23.4	18.5	18.9	20.2	21.6	18.5	18.9	20.2	21.6																			
		MbH	0.90	0.84	0.68	0.51	0.93	0.87	0.71	0.53	0.95	0.89	0.73	0.54	0.98	0.92	0.75	0.56	1.00	0.96	0.78	0.58	1.00	0.96	0.78	0.58	1.00	0.96	0.78	0.58																			
80		S/T	23	22	19	16	24	23	20	16	24	23	20	16	24	23	20	16	23	22	20	16	21	21	18	15	21	21	18	15																			
		ΔT	1.64	1.67	1.73	1.78	1.76	1.80	1.85	1.91	1.87	1.91	1.97	2.03	1.96	2.01	2.07	2.14	2.04	2.09	2.16	2.23	2.11	2.16	2.23	2.30	2.11	2.16	2.23	2.30																			
80		KW	6.1	6.3	6.5	6.7	6.6	6.8	7.0	7.2	7.2	7.3	7.6	7.9	7.7	7.8	8.1	8.4	8.1	8.3	8.6	8.9	8.6	8.8	9.1	9.5	8.6	8.8	9.1	9.5																			
		Amps	231	248	262	273	259	279	294	307	294	317	335	349	335	361	381	397	377	406	429	447	417	448	474	494	417	448	474	494																			
80		Hi Pr	105	111	121	129	110	117	128	137	115	122	133	142	121	128	140	149	126	134	147	156	131	139	152	162	131	139	152	162																			
		Lo Pr	20.9	21.4	22.8	24.4	20.4	20.9	22.3	23.8	19.9	20.4	21.8	23.3	19.4	19.9	21.2	22.7	18.5	18.9	20.2	21.6	17.1	17.5	18.7	20.0	17.1	17.5	18.7	20.0																			
700		MbH	0.86	0.81	0.66	0.49	0.90	0.84	0.68	0.51	0.92	0.86	0.70	0.52	0.95	0.89	0.72	0.54	0.98	0.92	0.75	0.56	0.99	0.93	0.76	0.57	0.99	0.93	0.76	0.57																			
		S/T	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	22	21	19	15	22	21	19	15																			
700		ΔT	1.60	1.64	1.69	1.74	1.72	1.76	1.81	1.87	1.83	1.86	1.92	1.98	1.92	1.96	2.02	2.08	1.99	2.04	2.10	2.17	2.06	2.11	2.17	2.25	2.06	2.11	2.17	2.25																			
		KW	6.0	6.1	6.3	6.5	6.4	6.6	6.8	7.0	7.0	7.1	7.4	7.6	7.9	7.4	7.6	7.9	8.2	7.9	8.1	8.4	8.7	8.4	8.6	8.9	9.2	8.4	8.6	8.9	9.2																		
700		Amps	224	241	254	265	251	270	285	298	286	307	324	338	325	350	370	385	366	394	416	434	404	435	459	479	404	435	459	479																			
		Hi Pr	101	108	118	125	107	114	124	132	111	118	129	138	117	124	136	145	123	130	142	152	127	135	147	157	127	135	147	157																			
85		Lo Pr	23.74	24.19	25.34	27.03	23.18	23.63	24.75	26.40	22.63	23.07	24.16	25.78	22.08	22.51	23.57	25.15	20.98	21.38	22.39	23.89	19.43	19.81	20.74	22.13	19.43	19.81	20.74	22.13																			
		MbH	0.98	0.95	0.86	0.70	1.00	0.98	0.89	0.72	1.00	1.00	0.91	0.74	1.00	1.00	0.94	0.76	1.00	1.00	0.98	0.79	1.00	1.00	0.98	0.80	1.00	1.00	0.98	0.80																			
900		S/T	24	23	22	19	24	24	22	19	23	24	22	19	23	23	23	20	21	22	22	19	20	20	21	18	20	20	21	18																			
		ΔT	1.67	1.70	1.75	1.81	1.79	1.83	1.88	1.94	1.90	1.94	2.00	2.07	2.00	2.04	2.10	2.17	2.08	2.12	2.19	2.26	2.15	2.20	2.27	2.34	2.15	2.20	2.27	2.34																			
900		KW	6.2	6.4	6.6	6.8	6.7	6.9	7.1	7.4	7.3	7.5	7.7	8.0	7.8	8.0	8.2	8.6	8.3	8.5	8.8	9.1	8.8	9.0	9.3	9.7	8.8	9.0	9.3	9.7																			
		Amps	235	253	267	279	264	284	300	313	300	323	341	356	342	368	389	405	385	414	437	456	425	457	483	504	425	457	483	504																			
900		Hi Pr	107	113	124	132	113	120	131	139	117	125	136	145	123	131	143	152	129	137	150	159	133	142	155	165	133	142	155	165																			
		Lo Pr	23.0	23.5	24.6	26.2	22.5	22.9	24.0	25.6	22.0	22.4	23.5	25.0	21.4	21.9	22.9	24.4	20.4	20.8	21.7	23.2	18.9	19.2	20.1	21.5	18.9	19.2	20.1	21.5																			
800		MbH	0.94	0.91	0.82	0.66	0.97	0.94	0.85	0.69	1.00	0.96	0.87	0.71	1.00	0.99	0.90	0.73	1.00	1.00	0.93	0.76	1.00	1.00	0.94	0.76	1.00	1.00	0.94	0.76																			
		S/T	25	24	23	20	25	25	23	20	25	25	23	20	25	25	24	20	23	24	23	20	22	22	22	19	22	22	22	19																			
800		ΔT	1.65	1.69	1.74	1.79	1.78	1.81	1.87	1.93	1.88	1.92	1.98	2.05	1.98	2.02	2.09	2.15	2.06	2.11	2.17	2.24	2.13	2.18	2.25	2.32	2.13	2.18	2.25	2.32																			
		KW	6.2	6.3	6.5	6.8	6.7	6.8	7.0	7.3	7.2	7.4	7.7	7.9	7.7	7.9	8.2	8.5	8.2	8.4	8.7	9.0	8.7	8.9	9.2	9.6	8.7	8.9	9.2	9.6																			
800		Amps	233	251	265	276	261	281	297	310	297	320	338	352	339	364	385	401	381	410	433	452	421	453	478	499	421	453	478	499																			
		Hi Pr	106	112	123	131	112	119	130	138	116	123	135	143	122	130	141	151	128	136	148	158	132	140	153	163	132	140	153	163																			
800		Lo Pr	21.3	21.7	22.7	24.2	20.8	21.2	22.2	23.7	20.3	20.7	21.7	23.1	19.8	20.2	21.1	22.5	18.8	19.2	20.1	21.4	17.4	17.7	18.6	19.8	17.4	17.7	18.6	19.8																			
		MbH	0.91	0.87	0.79	0.64	0.94	0.91	0.82	0.66	0.96	0.93	0.84	0.68	0.99	0.96	0.86	0.70	1.00	0.99	0.90	0.73	1.00	1.00	0.91	0.73	1.00	1.00	0.91	0.73																			
700		S/T	25	25	24	21	26	25	24	21	26	25	24	21	26	25	24	21	25	25	24	20	23	23	22	19	23	23	22	19																			
		ΔT	1.62	1.65	1.70	1.75	1.73	1.77	1.83	1.88	1.84	1.88	1.94	2.00	1.93	1.97	2.04	2.10	2.01	2.05	2.12	2.19	2.08	2.12	2.19	2.26	2.08	2.12	2.19	2.26																			
700		KW	6.0	6.1	6.3	6.6	6.5	6.6	6.9	7.1	7.0	7.2	7.4	7.7	7.5	7.7	7.9	8.2	8.0	8.2	8.5	8.8	8.5	8.7	9.0	9.3	8.5	8.7	9.0	9.3																			
		Amps	226	243	257	268	254	273	288	301	288	310	328	342	328	353	373	389	370	398	420	438	408	439	464	484	408	439	464	484																			
700		Hi Pr	102	109	119	127	108	115	126	134	112	120	131	139	118	126	137	146	124	132	144	153	128	136	149	158	128	136	149	158																			
		Lo Pr	20.9	21.4	22.8	24.4	20.4	20.9	22.3	23.8	19.9	20.4	21.8	23.3	19.4	19.9	21.2	22.7	18.5	18.9	20.2	21.6	17.1	17.5	18.7	20.0	17.1	17.5	18.7	20.0																			

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects AHRI (TVA) Rating Conditions
 KW = Total system power
 Amps = Outdoor unit amps (compressor + fan)

COOLING DATA — GSZ130301A* / AR*F30301**

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																							
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
70	MBh	27.4	28.4	31.1	-	26.8	27.8	30.4	-	26.1	27.1	29.7	-	25.5	26.4	29.0	-	24.2	25.1	27.5	-	22.4	23.3	25.5	-
	S/T	0.76	0.63	0.44	-	0.79	0.66	0.46	-	0.81	0.67	0.47	-	0.83	0.70	0.48	-	0.87	0.72	0.50	-	0.87	0.73	0.51	-
	ΔT	16	14	11	-	17	14	11	-	17	14	11	-	17	14	11	-	16	14	11	-	15	13	10	-
	KW	1.98	2.02	2.08	-	2.13	2.17	2.24	-	2.25	2.30	2.37	-	2.37	2.42	2.49	-	2.46	2.52	2.60	-	2.55	2.60	2.68	-
	Amps	7.8	7.9	8.2	-	8.3	8.5	8.8	-	9.0	9.2	9.5	-	9.6	9.8	10.2	-	10.2	10.5	10.8	-	10.8	11.1	11.4	-
	Hi PR	229	246	260	-	257	276	292	-	292	314	332	-	333	358	378	-	374	403	425	-	413	445	470	-
Lo PR	107	114	124	-	113	120	131	-	117	125	136	-	123	131	143	-	129	137	150	-	134	142	155	-	
1050	MBh	27.0	28.0	30.7	-	26.4	27.4	30.0	-	25.8	26.7	29.3	-	25.1	26.1	28.5	-	23.9	24.7	27.1	-	22.1	22.9	25.1	-
	S/T	0.73	0.61	0.42	-	0.75	0.63	0.44	-	0.77	0.65	0.45	-	0.80	0.67	0.46	-	0.83	0.69	0.48	-	0.84	0.70	0.48	-
	ΔT	17	15	11	-	17	15	11	-	17	15	11	-	18	15	12	-	17	15	11	-	16	14	11	-
	KW	1.97	2.01	2.07	-	2.12	2.16	2.22	-	2.24	2.29	2.36	-	2.35	2.40	2.48	-	2.45	2.50	2.58	-	2.53	2.59	2.67	-
	Amps	7.7	7.9	8.1	-	8.3	8.5	8.8	-	9.0	9.2	9.5	-	9.6	9.8	10.1	-	10.2	10.4	10.7	-	10.7	11.0	11.3	-
	Hi PR	227	245	258	-	255	274	290	-	290	312	330	-	330	355	375	-	372	400	422	-	411	442	467	-
Lo PR	106	113	123	-	112	119	130	-	116	124	135	-	122	130	142	-	128	136	149	-	133	141	154	-	
927	MBh	25.7	26.6	29.1	-	25.1	26.0	28.5	-	24.5	25.4	27.8	-	23.9	24.7	27.1	-	22.7	23.5	25.8	-	21.0	21.8	23.9	-
	S/T	0.70	0.58	0.40	-	0.72	0.60	0.42	-	0.74	0.62	0.43	-	0.77	0.64	0.44	-	0.79	0.66	0.46	-	0.80	0.67	0.46	-
	ΔT	18	15	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	15	12	-	17	14	11	-
	KW	1.94	1.98	2.04	-	2.08	2.13	2.19	-	2.21	2.25	2.32	-	2.32	2.37	2.44	-	2.41	2.46	2.54	-	2.49	2.54	2.62	-
	Amps	7.6	7.8	8.0	-	8.2	8.3	8.6	-	8.8	9.0	9.3	-	9.4	9.6	9.9	-	10.0	10.2	10.5	-	10.5	10.8	11.1	-
	Hi PR	223	240	253	-	250	269	284	-	284	306	323	-	324	348	368	-	364	392	414	-	402	433	457	-
Lo PR	104	111	121	-	110	117	128	-	114	121	133	-	120	128	139	-	126	134	146	-	130	138	151	-	
75	MBh	27.89	28.71	31.08	33.36	27.24	28.05	30.36	32.58	26.59	27.38	29.64	31.81	25.94	26.71	28.91	31.03	24.65	25.38	27.47	29.48	22.83	23.51	25.44	27.31
	S/T	0.86	0.77	0.59	0.38	0.90	0.80	0.61	0.39	0.92	0.82	0.62	0.40	0.95	0.85	0.64	0.41	0.98	0.88	0.67	0.43	0.99	0.89	0.67	0.43
	ΔT	19	17	14	10	19	18	14	10	19	18	14	10	19	18	15	10	19	17	14	10	18	16	13	9
	KW	2.00	2.04	2.10	2.16	2.14	2.19	2.25	2.33	2.27	2.32	2.39	2.47	2.39	2.44	2.51	2.59	2.48	2.54	2.62	2.70	2.57	2.62	2.71	2.79
	Amps	7.8	8.0	8.2	8.5	8.4	8.6	8.9	9.2	9.1	9.3	9.6	10.0	9.7	9.9	10.3	10.6	10.3	10.5	10.9	11.3	10.9	11.2	11.5	11.9
	Hi PR	231	249	263	274	259	279	295	307	295	317	335	350	336	362	382	398	378	407	430	448	418	449	475	495
Lo PR	108	115	125	133	114	121	132	141	118	126	138	147	124	132	145	154	130	139	151	161	135	144	157	167	
1050	MBh	27.5	28.3	30.6	32.9	26.8	27.6	29.9	32.1	26.2	27.0	29.2	31.3	25.6	26.3	28.5	30.6	24.3	25.0	27.1	29.0	22.5	23.2	25.1	26.9
	S/T	0.83	0.74	0.56	0.36	0.86	0.77	0.58	0.37	0.88	0.79	0.60	0.38	0.91	0.81	0.61	0.40	0.94	0.84	0.64	0.41	0.95	0.85	0.64	0.41
	ΔT	20	18	15	10	20	19	15	10	20	19	15	11	20	19	15	11	20	18	15	10	19	17	14	10
	KW	1.99	2.03	2.09	2.15	2.13	2.18	2.24	2.31	2.26	2.31	2.38	2.45	2.37	2.42	2.50	2.58	2.47	2.52	2.60	2.69	2.55	2.61	2.69	2.78
	Amps	7.8	8.0	8.2	8.5	8.4	8.6	8.8	9.1	9.1	9.3	9.6	9.9	9.6	9.9	10.2	10.6	10.2	10.5	10.8	11.2	10.8	11.1	11.4	11.9
	Hi PR	230	247	261	272	258	277	293	305	293	315	333	347	334	359	379	395	375	404	427	445	415	446	471	492
Lo PR	107	114	124	133	113	120	131	140	118	125	137	146	124	131	144	153	130	138	150	160	134	143	156	166	
927	MBh	26.1	26.9	29.1	31.2	25.5	26.3	28.4	30.5	24.9	25.6	27.7	29.8	24.3	25.0	27.1	29.0	23.1	23.8	25.7	27.6	21.4	22.0	23.8	25.6
	S/T	0.79	0.71	0.54	0.35	0.82	0.73	0.56	0.36	0.84	0.75	0.57	0.37	0.87	0.78	0.59	0.38	0.90	0.81	0.61	0.39	0.91	0.81	0.62	0.40
	ΔT	21	19	15	11	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	19	18	15	10
	KW	1.96	2.00	2.06	2.12	2.10	2.14	2.21	2.28	2.22	2.27	2.34	2.42	2.34	2.38	2.46	2.54	2.43	2.48	2.56	2.64	2.51	2.56	2.65	2.73
	Amps	7.6	7.8	8.1	8.3	8.2	8.4	8.7	9.0	8.9	9.1	9.4	9.7	9.5	9.7	10.0	10.4	10.1	10.3	10.6	11.0	10.6	10.9	11.2	11.6
	Hi PR	225	242	256	267	252	272	287	299	287	309	326	340	327	352	372	388	368	396	418	436	406	437	462	482
Lo PR	105	112	122	130	111	118	129	137	115	123	134	143	121	129	141	150	127	135	147	157	131	140	152	162	

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects ACCA (TVA) Rating Conditions
 KW = Total system power
 Amps = Outdoor unit amps (compressor + fan)

COOLING DATA — GSZ130301A* / AR*F30301** (CONT.)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE											
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	MBh	28.38	29.00	30.99	33.13	27.72	28.33	30.27	32.36	27.06	27.66	29.55	31.59	26.40	26.98	28.83	30.81	25.08	25.63	27.38	29.27	23.24	23.74	25.37	27.12
	S/T	0.95	0.89	0.72	0.54	0.98	0.92	0.75	0.56	1.00	0.94	0.77	0.57	1.00	0.98	0.79	0.59	1.00	1.00	0.82	0.62	1.00	1.00	0.83	0.62
	ΔT	21	20	18	14	21	20	18	14	21	20	18	14	21	21	18	14	20	20	18	14	18	19	17	13
	kW	2.01	2.05	2.12	2.18	2.16	2.20	2.27	2.34	2.29	2.34	2.41	2.49	2.41	2.46	2.53	2.62	2.50	2.56	2.64	2.72	2.59	2.64	2.73	2.82
	Amps	7.9	8.1	8.3	8.6	8.5	8.7	9.0	9.3	9.2	9.4	9.7	10.1	9.8	10.0	10.3	10.7	10.4	10.6	11.0	11.4	11.0	11.3	11.6	12.0
	Hi PR	234	251	265	277	262	282	298	311	298	321	339	353	339	365	386	402	382	411	434	453	422	454	479	500
	Lo PR	109	116	127	135	115	123	134	142	120	127	139	148	126	134	146	156	132	140	153	163	136	145	158	169
	MBh	28.0	28.6	30.5	32.6	27.3	27.9	29.8	31.9	26.7	27.2	29.1	31.1	26.0	26.6	28.4	30.4	24.7	25.3	27.0	28.8	22.9	23.4	25.0	26.7
	S/T	0.91	0.85	0.69	0.52	0.94	0.88	0.72	0.54	0.96	0.90	0.74	0.55	1.00	0.93	0.76	0.57	1.00	0.97	0.79	0.59	1.00	0.98	0.80	0.59
	ΔT	22	21	19	15	22	22	19	15	23	22	19	15	23	22	19	15	22	21	19	15	20	20	17	14
kW	2.00	2.04	2.10	2.17	2.15	2.19	2.26	2.33	2.28	2.33	2.40	2.47	2.39	2.44	2.52	2.60	2.49	2.54	2.62	2.71	2.57	2.63	2.71	2.80	
Amps	7.8	8.0	8.3	8.6	8.4	8.6	8.9	9.2	9.1	9.3	9.6	10.0	9.7	10.0	10.3	10.7	10.3	10.6	10.9	11.3	10.9	11.2	11.5	12.0	
Hi PR	232	250	264	275	260	280	296	308	296	318	336	351	337	363	383	399	379	408	431	449	419	451	476	497	
Lo PR	108	115	126	134	114	122	133	141	119	126	138	147	125	133	145	154	131	139	152	162	135	144	157	167	
MBh	26.6	27.1	29.0	31.0	25.9	26.5	28.3	30.3	25.3	25.9	27.7	29.6	24.7	25.3	27.0	28.8	23.5	24.0	25.6	27.4	21.7	22.2	23.7	25.4	
S/T	0.87	0.82	0.66	0.50	0.90	0.85	0.69	0.51	0.92	0.87	0.71	0.53	0.95	0.89	0.73	0.54	0.99	0.93	0.76	0.56	1.00	0.94	0.76	0.57	
ΔT	23	22	19	15	23	22	19	15	23	22	19	15	23	22	19	16	23	22	19	15	22	21	18	14	
kW	1.97	2.01	2.07	2.13	2.12	2.16	2.22	2.29	2.24	2.29	2.36	2.43	2.35	2.40	2.48	2.56	2.45	2.50	2.58	2.66	2.53	2.59	2.67	2.76	
Amps	7.7	7.9	8.1	8.4	8.3	8.5	8.8	9.1	9.0	9.2	9.5	9.8	9.6	9.8	10.1	10.5	10.2	10.4	10.7	11.1	10.7	11.0	11.3	11.8	
Hi PR	227	245	258	269	255	274	290	302	290	312	330	344	330	355	375	391	372	400	422	440	411	442	467	487	
Lo PR	106	113	123	131	112	119	130	139	116	124	135	144	122	130	142	151	128	136	149	159	133	141	154	164	
85	MBh	28.88	29.44	30.83	32.89	28.21	28.76	30.12	32.13	27.54	28.07	29.40	31.36	26.87	27.39	28.68	30.60	25.52	26.02	27.25	29.07	23.64	24.10	25.24	26.93
	S/T	0.99	0.96	0.87	0.70	1.00	0.99	0.90	0.73	1.00	1.00	0.92	0.75	1.00	1.00	0.95	0.77	1.00	1.00	0.99	0.80	1.00	1.00	0.99	0.81
	ΔT	22	22	21	18	22	22	21	18	22	22	21	18	21	21	21	18	20	20	21	18	19	19	20	17
	kW	2.03	2.07	2.13	2.20	2.18	2.22	2.29	2.36	2.31	2.36	2.43	2.51	2.42	2.48	2.55	2.64	2.52	2.58	2.66	2.75	2.61	2.66	2.75	2.84
	Amps	8.0	8.1	8.4	8.7	8.6	8.8	9.0	9.4	9.3	9.5	9.8	10.1	9.9	10.1	10.4	10.8	10.5	10.7	11.1	11.5	11.1	11.4	11.7	12.2
	Hi PR	236	254	268	280	265	285	301	314	301	324	342	357	343	369	390	406	386	415	438	457	426	459	484	505
	Lo PR	110	117	128	136	116	124	135	144	121	129	140	150	127	135	147	157	133	142	155	165	138	146	160	170
	MBh	28.5	29.0	30.4	32.4	27.8	28.3	29.7	31.7	27.1	27.7	29.0	30.9	26.5	27.0	28.3	30.1	25.1	25.6	26.8	28.6	23.3	23.7	24.9	26.5
	S/T	0.95	0.92	0.83	0.67	0.99	0.95	0.86	0.70	1.00	0.98	0.88	0.71	1.00	1.00	0.91	0.74	1.00	1.00	0.94	0.77	1.00	1.00	0.95	0.77
	ΔT	24	23	22	19	24	24	22	19	24	24	22	19	23	24	22	19	22	22	22	19	20	21	21	18
kW	2.02	2.06	2.12	2.19	2.17	2.21	2.28	2.35	2.30	2.34	2.42	2.49	2.41	2.46	2.54	2.62	2.51	2.56	2.64	2.73	2.59	2.65	2.74	2.82	
Amps	7.9	8.1	8.3	8.6	8.5	8.7	9.0	9.3	9.2	9.4	9.7	10.1	9.8	10.1	10.4	10.7	10.4	10.7	11.0	11.4	11.0	11.3	11.6	12.1	
Hi PR	234	252	266	278	263	283	299	311	299	322	340	354	340	366	387	403	383	412	435	454	423	455	481	502	
Lo PR	109	116	127	135	116	123	134	143	120	128	139	148	126	134	146	156	132	141	153	163	137	145	159	169	
MBh	27.0	27.6	28.9	30.8	26.4	26.9	28.2	30.1	25.8	26.3	27.5	29.4	25.1	25.6	26.8	28.6	23.9	24.4	25.5	27.2	22.1	22.6	23.6	25.2	
S/T	0.91	0.88	0.79	0.64	0.94	0.91	0.82	0.67	0.97	0.93	0.84	0.68	1.00	0.96	0.87	0.71	1.00	1.00	0.90	0.73	1.00	1.00	0.91	0.74	
ΔT	24	24	23	20	25	24	23	20	25	24	23	20	25	25	23	20	24	24	23	20	22	22	21	18	
kW	1.99	2.03	2.09	2.15	2.13	2.18	2.24	2.31	2.26	2.31	2.38	2.45	2.37	2.42	2.50	2.58	2.47	2.52	2.60	2.69	2.55	2.61	2.69	2.78	
Amps	7.8	8.0	8.2	8.5	8.4	8.6	8.8	9.1	9.1	9.3	9.6	9.9	9.6	9.9	10.2	10.6	10.2	10.5	10.8	11.2	10.8	11.1	11.4	11.9	
Hi PR	230	247	261	272	258	277	293	305	293	315	333	347	334	359	379	395	375	404	426	445	415	446	471	491	
Lo PR	107	114	124	133	113	120	131	140	118	125	137	146	124	131	144	153	130	138	150	160	134	143	156	166	

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects AHRI (TVA) Rating Conditions
 kW = Total system power
 Amps = Outdoor unit amps (compressor + fan)

COOLING DATA — GSZ130361B* / AR*F364216**

IDB		OUTDOOR AMBIENT TEMPERATURE																																			
		65°F						75°F						85°F						95°F						105°F						115°F					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
1350		34.3	35.5	38.9	-	33.5	34.7	38.0	-	32.7	33.9	37.1	-	31.9	33.1	36.2	-	30.3	31.4	34.4	-	28.1	29.1	31.9	-	28.1	29.1	31.9	-	28.1	29.1	31.9	-				
S/T		0.75	0.63	0.44	-	0.78	0.65	0.45	-	0.80	0.67	0.46	-	0.83	0.69	0.48	-	0.86	0.72	0.50	-	0.86	0.72	0.50	-	0.86	0.72	0.50	-	0.86	0.72	0.50	-				
ΔT		18	15	12	-	18	15	12	-	18	15	12	-	18	16	12	-	18	15	12	-	17	14	11	-	17	14	11	-	17	14	11	-				
KW		2.49	2.54	2.62	-	2.68	2.74	2.82	-	2.84	2.91	3.00	-	2.99	3.06	3.16	-	3.12	3.18	3.29	-	3.22	3.30	3.40	-	3.22	3.30	3.40	-	3.22	3.30	3.40	-				
Amps		8.6	8.8	9.1	-	9.3	9.5	9.8	-	10.1	10.3	10.7	-	10.8	11.0	11.4	-	11.5	11.7	12.1	-	12.1	12.4	12.8	-	12.1	12.4	12.8	-	12.1	12.4	12.8	-				
Hi Pr		238	256	270	-	267	287	303	-	304	327	345	-	346	372	393	-	389	419	442	-	430	463	488	-	430	463	488	-	430	463	488	-				
Lo Pr		107	114	124	-	113	120	131	-	118	125	137	-	124	131	144	-	130	138	150	-	134	143	156	-	134	143	156	-	134	143	156	-				
70		33.3	34.5	37.8	-	32.5	33.7	36.9	-	31.7	32.9	36.1	-	31.0	32.1	35.2	-	29.4	30.5	33.4	-	27.3	28.3	31.0	-	27.3	28.3	31.0	-	27.3	28.3	31.0	-				
S/T		0.72	0.60	0.42	-	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.79	0.66	0.46	-	0.82	0.68	0.47	-	0.82	0.68	0.48	-	0.82	0.68	0.48	-	0.82	0.68	0.48	-				
ΔT		18	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	18	16	12	-	17	15	11	-	17	15	11	-	17	15	11	-				
KW		2.47	2.52	2.60	-	2.66	2.71	2.80	-	2.82	2.88	2.97	-	2.97	3.03	3.13	-	3.09	3.16	3.26	-	3.20	3.27	3.38	-	3.20	3.27	3.38	-	3.20	3.27	3.38	-				
Amps		8.5	8.7	9.0	-	9.2	9.4	9.7	-	10.0	10.2	10.6	-	10.7	10.9	11.3	-	11.3	11.6	12.0	-	12.0	12.3	12.7	-	12.0	12.3	12.7	-	12.0	12.3	12.7	-				
Hi Pr		236	253	268	-	264	284	300	-	301	323	342	-	342	368	389	-	385	414	438	-	426	458	484	-	426	458	484	-	426	458	484	-				
Lo Pr		106	113	123	-	112	119	130	-	116	124	135	-	122	130	142	-	128	136	149	-	133	141	154	-	133	141	154	-	133	141	154	-				
1050		30.7	31.9	34.9	-	30.0	31.1	34.1	-	29.3	30.4	33.3	-	28.6	29.6	32.5	-	27.2	28.2	30.8	-	25.2	26.1	28.6	-	25.2	26.1	28.6	-	25.2	26.1	28.6	-				
S/T		0.69	0.58	0.40	-	0.72	0.60	0.42	-	0.74	0.61	0.43	-	0.76	0.63	0.44	-	0.79	0.66	0.46	-	0.80	0.66	0.46	-	0.80	0.66	0.46	-	0.80	0.66	0.46	-				
ΔT		19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	18	15	12	-	18	15	12	-	18	15	12	-				
KW		2.41	2.46	2.54	-	2.59	2.65	2.73	-	2.75	2.81	2.90	-	2.89	2.96	3.05	-	3.01	3.08	3.18	-	3.12	3.19	3.29	-	3.12	3.19	3.29	-	3.12	3.19	3.29	-				
Amps		8.3	8.5	8.8	-	9.0	9.2	9.5	-	9.7	10.0	10.3	-	10.4	10.6	11.0	-	11.0	11.3	11.7	-	11.7	12.0	12.4	-	11.7	12.0	12.4	-	11.7	12.0	12.4	-				
Hi Pr		228	246	260	-	256	276	291	-	292	314	331	-	332	357	377	-	374	402	425	-	413	444	469	-	413	444	469	-	413	444	469	-				
Lo Pr		103	109	120	-	109	116	126	-	113	120	131	-	119	126	138	-	124	132	144	-	129	137	149	-	129	137	149	-	129	137	149	-				
75		34.88	35.91	38.87	41.72	34.07	35.08	37.97	40.75	33.26	34.24	37.06	39.78	32.45	33.41	36.16	38.81	30.82	31.74	34.35	36.87	28.55	29.40	31.82	34.15	28.55	29.40	31.82	34.15	28.55	29.40	31.82	34.15				
S/T		0.86	0.77	0.58	0.37	0.89	0.79	0.60	0.39	0.91	0.81	0.62	0.40	0.94	0.84	0.64	0.41	0.97	0.87	0.66	0.42	0.98	0.88	0.67	0.43	0.98	0.88	0.67	0.43	0.98	0.88	0.67	0.43				
ΔT		20	19	15	11	21	19	16	11	21	19	16	11	21	19	16	11	20	19	15	11	19	18	14	10	19	18	14	10	19	18	14	10				
KW		2.51	2.56	2.64	2.73	2.70	2.76	2.84	2.94	2.87	2.93	3.02	3.12	3.02	3.08	3.18	3.29	3.14	3.21	3.32	3.43	3.25	3.32	3.43	3.55	3.25	3.32	3.43	3.55	3.25	3.32	3.43	3.55				
Amps		8.7	8.9	9.2	9.5	9.4	9.6	9.9	10.3	10.2	10.4	10.8	11.2	10.9	11.1	11.5	11.9	11.6	11.8	12.2	12.7	12.2	12.5	13.0	13.4	12.2	12.5	13.0	13.4	12.2	12.5	13.0	13.4				
Hi Pr		240	259	273	285	270	290	306	320	307	330	349	364	349	376	397	414	393	423	447	466	434	467	493	515	434	467	493	515	434	467	493	515				
Lo Pr		108	115	126	134	114	122	133	141	119	126	138	147	125	133	145	154	131	139	152	162	135	144	157	167	135	144	157	167	135	144	157	167				
1350		33.9	34.9	37.7	40.5	33.1	34.1	36.9	39.6	32.3	33.2	36.0	38.6	31.5	32.4	35.1	37.7	29.9	30.8	33.3	35.8	27.7	28.5	30.9	33.2	27.7	28.5	30.9	33.2	27.7	28.5	30.9	33.2				
S/T		0.82	0.73	0.55	0.36	0.85	0.76	0.57	0.37	0.87	0.78	0.59	0.38	0.90	0.80	0.61	0.39	0.93	0.83	0.63	0.40	0.94	0.84	0.63	0.41	0.94	0.84	0.63	0.41	0.94	0.84	0.63	0.41				
ΔT		21	20	16	11	21	20	16	11	21	20	16	11	21	20	16	11	21	20	16	11	20	18	15	10	20	18	15	10	20	18	15	10				
KW		2.49	2.54	2.62	2.70	2.68	2.74	2.82	2.91	2.85	2.91	3.00	3.10	2.99	3.06	3.16	3.26	3.12	3.19	3.29	3.40	3.22	3.30	3.40	3.52	3.22	3.30	3.40	3.52	3.22	3.30	3.40	3.52				
Amps		8.6	8.8	9.1	9.4	9.3	9.5	9.8	10.2	10.1	10.3	10.7	11.1	10.8	11.0	11.4	11.8	11.5	11.7	12.1	12.6	12.1	12.4	12.8	13.3	12.1	12.4	12.8	13.3	12.1	12.4	12.8	13.3				
Hi Pr		238	256	270	282	267	287	303	316	304	327	345	360	346	372	393	410	389	419	442	461	430	463	489	510	430	463	489	510	430	463	489	510				
Lo Pr		107	114	124	133	113	120	131	140	118	125	137	146	124	131	144	153	130	138	150	160	134	143	156	166	134	143	156	166	134	143	156	166				
1200		31.3	32.2	34.8	37.4	30.5	31.4	34.0	36.5	29.8	30.7	33.2	35.6	29.1	29.9	32.4	34.8	27.6	28.4	30.8	33.0	25.6	26.3	28.5	30.6	25.6	26.3	28.5	30.6	25.6	26.3	28.5	30.6				
S/T		0.79	0.70	0.53	0.34	0.82	0.73	0.55	0.36	0.84	0.75	0.57	0.36	0.86	0.77	0.58	0.38	0.90	0.80	0.61	0.39	0.90	0.81	0.61	0.39	0.90	0.81	0.61	0.39	0.90	0.81	0.61	0.39				
ΔT		22	20	16	11	22	20	16	11	22	20	16	11	22	20	16	11	22	20	16	11	20	19	15	11	20	19	15	11	20	19	15	11				
KW		2.43	2.48	2.56	2.64	2.61	2.67	2.75	2.84	2.78	2.84	2.93	3.02	2.92	2.98	3.08	3.18	3.04	3.11	3.21	3.31	3.04	3.11	3.21	3.32	3.04	3.11	3.21	3.32	3.04	3.11	3.21	3.32				
Amps		8.4	8.6	8.9	9.2	9.0	9.3	9.6	9.9	9.8	10.0	10.4	10.8	10.5	10.7	11.1	11.5	11.1	11.4	11.8	12.2	11.8	12.1	12.5	13.0	11.8	12.1	12.5	13.0	11.8	12.1	12.5	13.0				
Hi Pr		231	248	262	274	259	279	294	307	295	317	335	349	335	361	381	398	377	406	429	447	417	449	474	494	417	449	474	494	417	449	474	494				
Lo Pr		104	111	121	129	110	117	128	136	114	121	133	141	120	128	139	148	126	134	146	155	130	138	151	161	130	138	151	161	130	138	151	161				

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects ACCA (TVA) Rating Conditions
 KW = Total system power
 Amps = Outdoor unit amps (compressor + fan)

COOLING DATA — GSZ130361B* / AR*F364216** (CONT.)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE											
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	MBh	35.50	36.27	38.75	41.43	34.67	35.43	37.85	40.46	33.85	34.59	36.95	39.50	33.02	33.74	36.05	38.54	31.37	32.06	34.25	36.61	29.06	29.69	31.72	33.91
	S/T	0.94	0.88	0.72	0.54	1.00	0.91	0.74	0.56	1.00	0.94	0.76	0.57	1.00	0.97	0.79	0.59	1.00	1.00	0.82	0.61	1.00	1.00	0.82	0.62
	ΔT	23	22	19	15	23	22	19	15	23	22	19	15	22	22	19	15	21	22	19	15	20	20	18	14
	KW	2.53	2.58	2.66	2.75	2.72	2.78	2.87	2.96	2.89	2.95	3.05	3.15	3.04	3.11	3.21	3.32	3.17	3.24	3.35	3.46	3.28	3.35	3.46	3.58
	Amps	8.8	9.0	9.3	9.6	9.5	9.7	10.0	10.4	10.3	10.5	10.9	11.3	11.0	11.2	11.6	12.0	11.7	12.0	12.3	12.8	12.4	12.7	13.1	13.6
	Hi Pr	243	261	276	288	272	293	310	323	310	333	352	367	353	380	401	418	397	427	451	470	439	472	498	520
	Lo Pr	109	116	127	135	116	123	134	143	120	128	139	148	126	134	146	156	132	141	153	163	137	145	159	169
	MBh	34.5	35.2	37.6	40.2	33.7	34.4	36.8	39.3	32.9	33.6	35.9	38.4	32.1	32.8	35.0	37.4	30.5	31.1	33.3	35.5	28.2	28.8	30.8	32.9
	S/T	0.90	0.84	0.68	0.51	0.93	0.87	0.71	0.53	0.95	0.89	0.73	0.54	0.98	0.92	0.75	0.56	1.00	0.96	0.78	0.58	1.00	0.96	0.78	0.59
	ΔT	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	23	23	20	16	22	21	19	15
KW	2.51	2.56	2.64	2.73	2.70	2.76	2.85	2.94	2.87	2.93	3.02	3.12	3.02	3.08	3.18	3.29	3.14	3.21	3.32	3.43	3.25	3.32	3.43	3.55	
Amps	8.7	8.9	9.2	9.5	9.4	9.6	9.9	10.3	10.2	10.4	10.8	11.2	10.9	11.1	11.5	11.9	11.6	11.8	12.2	12.7	12.2	12.5	13.0	13.4	
Hi Pr	240	259	273	285	270	290	306	320	307	330	349	364	349	376	397	414	393	423	447	466	434	467	493	515	
Lo Pr	108	115	126	134	114	122	133	141	119	126	138	147	125	133	145	154	131	139	152	162	135	144	157	167	
MBh	31.8	32.5	34.7	37.1	31.1	31.7	33.9	36.3	30.3	31.0	33.1	35.4	29.6	30.2	32.3	34.5	28.1	28.7	30.7	32.8	26.0	26.6	28.4	30.4	
S/T	0.86	0.81	0.66	0.49	0.89	0.84	0.68	0.51	0.92	0.86	0.70	0.52	0.95	0.89	0.72	0.54	0.98	0.92	0.75	0.56	0.99	0.93	0.76	0.57	
ΔT	24	23	20	16	24	23	20	16	24	23	20	16	25	24	20	16	24	23	20	16	23	22	19	15	
KW	2.45	2.50	2.58	2.66	2.64	2.69	2.78	2.87	2.80	2.86	2.95	3.05	2.94	3.01	3.10	3.21	3.06	3.13	3.23	3.34	3.17	3.24	3.35	3.46	
Amps	8.5	8.7	8.9	9.3	9.1	9.3	9.6	10.0	9.9	10.1	10.5	10.9	10.6	10.8	11.2	11.6	11.2	11.5	11.9	12.3	11.9	12.2	12.6	13.1	
Hi Pr	233	251	265	276	262	282	297	310	298	320	338	353	339	365	385	402	381	410	433	452	421	453	479	499	
Lo Pr	105	112	122	130	111	118	129	137	115	123	134	143	121	129	141	150	127	135	147	157	131	140	152	162	
85	MBh	36.12	36.82	38.56	41.14	35.28	35.96	37.66	40.18	34.44	35.11	36.77	39.22	33.60	34.25	35.87	38.27	31.92	32.54	34.08	36.35	29.57	30.14	31.57	33.68
	S/T	0.98	0.95	0.86	0.70	1.00	0.98	0.89	0.72	1.00	1.00	0.91	0.74	1.00	1.00	0.94	0.76	1.00	1.00	0.98	0.79	1.00	1.00	0.98	0.80
	ΔT	24	24	23	19	24	24	23	20	23	24	23	20	23	23	23	20	22	22	23	20	20	21	21	18
	KW	2.55	2.60	2.68	2.77	2.74	2.80	2.89	2.99	2.91	2.98	3.07	3.18	3.07	3.13	3.24	3.34	3.20	3.27	3.37	3.49	3.31	3.38	3.49	3.61
	Amps	8.8	9.1	9.3	9.7	9.5	9.8	10.1	10.5	10.4	10.6	11.0	11.4	11.1	11.3	11.7	12.2	11.8	12.1	12.5	12.9	12.5	12.8	13.2	13.7
	Hi Pr	245	264	279	291	275	296	313	326	313	337	356	371	356	384	405	422	401	431	456	475	443	477	503	525
	Lo Pr	110	117	128	137	117	124	135	144	121	129	141	150	127	135	148	158	133	142	155	165	138	147	160	171
	MBh	35.1	35.7	37.4	39.9	34.3	34.9	36.6	39.0	33.4	34.1	35.7	38.1	32.6	33.3	34.8	37.2	31.0	31.6	33.1	35.3	28.7	29.3	30.6	32.7
	S/T	0.94	0.91	0.82	0.66	0.97	0.94	0.85	0.69	1.00	0.96	0.87	0.70	1.00	0.99	0.90	0.73	1.00	1.00	0.93	0.76	1.00	1.00	0.94	0.76
	ΔT	25	25	23	20	26	25	24	21	26	25	24	21	25	25	24	21	24	24	24	20	22	22	22	19
KW	2.53	2.58	2.66	2.75	2.72	2.78	2.87	2.96	2.89	2.95	3.05	3.15	3.04	3.11	3.21	3.32	3.17	3.24	3.35	3.46	3.28	3.35	3.46	3.58	
Amps	8.8	9.0	9.3	9.6	9.5	9.7	10.0	10.4	10.3	10.5	10.9	11.3	11.0	11.2	11.6	12.0	11.7	12.0	12.3	12.8	12.4	12.7	13.1	13.6	
Hi Pr	243	261	276	288	272	293	310	323	310	333	352	367	353	380	401	418	397	427	451	470	439	472	498	520	
Lo Pr	109	116	127	135	116	123	134	143	120	128	139	148	126	134	146	156	132	141	153	163	137	145	159	169	
MBh	32.4	33.0	34.6	36.9	31.6	32.2	33.8	36.0	30.9	31.5	32.9	35.1	30.1	30.7	32.1	34.3	28.6	29.2	30.5	32.6	26.5	27.0	28.3	30.2	
S/T	0.91	0.87	0.79	0.64	0.94	0.91	0.82	0.66	0.96	0.93	0.84	0.68	0.99	0.96	0.86	0.70	1.00	0.99	0.90	0.73	1.00	1.00	0.91	0.73	
ΔT	26	25	24	21	26	26	24	21	26	26	24	21	26	26	24	21	25	25	24	21	23	24	22	19	
KW	2.47	2.52	2.60	2.68	2.66	2.71	2.80	2.89	2.82	2.88	2.97	3.07	2.97	3.03	3.13	3.23	3.09	3.16	3.26	3.37	3.20	3.27	3.38	3.49	
Amps	8.5	8.7	9.0	9.3	9.2	9.4	9.7	10.1	10.0	10.2	10.6	11.0	10.7	10.9	11.3	11.7	11.3	11.6	12.0	12.5	12.0	12.3	12.7	13.2	
Hi Pr	235	253	268	279	264	284	300	313	301	323	341	356	342	368	389	406	385	414	438	456	425	458	483	504	
Lo Pr	106	113	123	131	112	119	130	139	116	124	135	144	122	130	142	151	128	136	149	159	133	141	154	164	

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects AHRI (TVA) Rating Conditions
 kW = Total system power
 Amps = Outdoor unit amps (compressor + fan)

COOLING DATA — GSZ130421A* / AR*F364216**

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																								
		65°F				75°F				85°F				95°F				105°F				115°F				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
70	1519	MBh	39.7	41.1	45.1	-	38.8	40.2	44.0	-	37.8	39.2	43.0	-	36.9	38.3	41.9	-	35.1	36.4	39.8	-	32.5	33.7	36.9	-
		S/T	0.74	0.62	0.43	-	0.77	0.64	0.45	-	0.79	0.66	0.46	-	0.82	0.68	0.47	-	0.85	0.71	0.49	-	0.85	0.71	0.49	-
		ΔT	18	15	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	17	15	11	-
		kW	2.89	2.95	3.04	-	3.10	3.17	3.27	-	3.29	3.36	3.47	-	3.46	3.54	3.65	-	3.60	3.68	3.80	-	3.73	3.81	3.93	-
		Amps	10.3	10.5	10.9	-	11.1	11.4	11.8	-	12.1	12.4	12.8	-	13.0	13.3	13.8	-	13.8	14.2	14.7	-	14.7	15.1	15.6	-
	1181	Hi PR	218	234	247	-	244	263	277	-	278	299	315	-	316	340	359	-	356	383	404	-	393	423	447	-
		Lo PR	107	114	124	-	113	120	131	-	118	125	137	-	124	131	144	-	130	138	150	-	134	143	156	-
		MBh	38.5	39.9	43.8	-	37.6	39.0	42.7	-	36.7	38.1	41.7	-	35.8	37.1	40.7	-	34.1	35.3	38.7	-	31.5	32.7	35.8	-
		S/T	0.71	0.59	0.41	-	0.73	0.61	0.43	-	0.75	0.63	0.44	-	0.78	0.65	0.45	-	0.81	0.67	0.47	-	0.81	0.68	0.47	-
		ΔT	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	17	15	11	-
75	1519	MBh	40.36	41.55	44.98	48.27	39.42	40.59	43.93	47.15	38.48	39.62	42.89	46.03	37.54	38.65	41.84	44.91	35.67	36.72	39.75	42.66	33.04	34.02	36.82	39.52
		S/T	0.84	0.76	0.57	0.37	0.88	0.78	0.59	0.38	0.90	0.80	0.61	0.39	0.93	0.83	0.63	0.40	0.96	0.86	0.65	0.42	0.97	0.87	0.66	0.42
		ΔT	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	19	18	15	10
		kW	2.91	2.97	3.06	3.16	3.13	3.19	3.29	3.40	3.32	3.39	3.50	3.61	3.49	3.57	3.68	3.80	3.63	3.71	3.83	3.96	3.76	3.84	3.97	4.10
		Amps	10.4	10.6	11.0	11.4	11.2	11.5	11.9	12.4	12.2	12.5	13.0	13.5	13.1	13.4	13.9	14.4	14.0	14.3	14.8	15.4	14.8	15.2	15.7	16.4
	1181	Hi PR	220	236	250	260	247	265	280	292	280	302	319	332	319	344	363	379	359	387	408	426	397	427	451	471
		Lo PR	108	115	126	134	114	122	133	141	119	126	138	147	125	133	145	154	131	139	152	162	135	144	157	167
		MBh	39.2	40.3	43.7	46.9	38.3	39.4	42.7	45.8	37.4	38.5	41.6	44.7	36.5	37.5	40.6	43.6	34.6	35.7	38.6	41.4	32.1	33.0	35.7	38.4
		S/T	0.81	0.72	0.55	0.35	0.84	0.75	0.57	0.36	0.86	0.77	0.58	0.37	0.88	0.79	0.60	0.38	0.92	0.82	0.62	0.40	0.93	0.83	0.63	0.40
		ΔT	22	20	16	11	22	20	16	11	22	20	16	11	22	20	17	11	22	20	16	11	20	19	15	11

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects ACCA (ITVA) Rating Conditions
 kW = Total system power
 Amps = Outdoor unit amps (compressor + fan)

COOLING DATA — GSZ130421A* / AR*F364216** (CONT.)

IDB		OUTDOOR AMBIENT TEMPERATURE																																															
		65°F								75°F								85°F								95°F								105°F								115°F							
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71																
1519		ENTERING INDOOR WET BULB TEMPERATURE																																															
		41.08	41.97	44.84	47.94	40.12	41.00	43.80	46.82	39.17	40.02	42.76	45.71	38.21	39.05	41.72	44.59	36.30	37.09	39.63	42.36	33.63	34.36	36.71	39.24	41.08	41.97	44.84	47.94	40.12	41.00	43.80	46.82	39.17	40.02	42.76	45.71	38.21	39.05	41.72	44.59	36.30	37.09	39.63	42.36	33.63	34.36	36.71	39.24
80		MBh	0.93	0.87	0.71	0.53	0.96	0.90	0.73	0.55	1.00	0.92	0.75	0.56	1.00	0.95	0.78	0.58	1.00	1.00	0.81	0.60	1.00	1.00	0.81	0.60	1.00	1.00	0.81	0.60	1.00	1.00	0.81	0.60	1.00	1.00	0.81	0.60	1.00	1.00	0.81	0.60							
		S/T	2.93	2.22	1.91	1.51	2.32	2.22	1.91	1.61	2.42	2.22	1.91	1.61	2.32	2.22	1.91	1.61	2.42	2.22	1.91	1.61	2.32	2.22	1.91	1.61	2.42	2.22	1.91	1.61	2.32	2.22	1.91	1.61	2.42	2.22	1.91	1.61	2.32	2.22	1.91	1.61							
1181		ΔT	2.93	3.00	3.09	3.18	3.15	3.22	3.32	3.43	3.35	3.42	3.53	3.64	3.52	3.59	3.71	3.83	3.66	3.74	3.87	3.99	3.79	3.87	4.00	4.13	3.79	3.87	4.00	4.13	3.79	3.87	4.00	4.13	3.79	3.87	4.00	4.13	3.79	3.87	4.00	4.13							
		Amps	10.4	10.7	11.1	11.5	11.3	11.6	12.0	12.5	12.3	12.7	13.1	13.6	13.2	13.6	14.0	14.6	14.1	14.5	15.0	15.6	15.0	15.4	15.9	16.5	15.0	15.4	15.9	16.5	15.0	15.4	15.9	16.5	15.0	15.4	15.9	16.5	15.0	15.4	15.9	16.5							
85		Hi PR	222	239	252	263	249	268	283	295	283	305	322	336	323	347	367	382	363	391	412	430	401	432	456	475	401	432	456	475	401	432	456	475	401	432	456	475	401	432	456	475							
		Lo PR	109	116	127	135	116	123	134	143	120	128	139	148	126	134	146	156	132	141	153	163	137	145	159	169	137	145	159	169	137	145	159	169	137	145	159	169	137	145	159	169							
1519		MBh	39.9	40.8	43.5	46.5	39.0	39.8	42.5	45.5	38.0	38.9	41.5	44.4	37.1	37.9	40.5	43.3	35.2	36.0	38.5	41.1	32.6	33.4	35.6	38.1	32.6	33.4	35.6	38.1	32.6	33.4	35.6	38.1	32.6	33.4	35.6	38.1	32.6	33.4	35.6	38.1							
		S/T	0.88	0.83	0.67	0.50	0.92	0.86	0.70	0.52	0.94	0.88	0.72	0.54	0.97	0.91	0.74	0.55	1.00	0.94	0.77	0.57	1.00	0.95	0.78	0.58	1.00	0.95	0.78	0.58	1.00	0.95	0.78	0.58	1.00	0.95	0.78	0.58	1.00	0.95	0.78	0.58							
1181		ΔT	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16							
		kW	2.91	2.97	3.06	3.16	3.13	3.19	3.29	3.40	3.32	3.39	3.50	3.61	3.49	3.57	3.68	3.80	3.63	3.71	3.83	3.96	3.76	3.84	3.97	4.10	3.76	3.84	3.97	4.10	3.76	3.84	3.97	4.10	3.76	3.84	3.97	4.10											
85		Amps	10.4	10.6	11.0	11.4	11.2	11.5	11.9	12.4	12.2	12.5	13.0	13.5	13.1	13.4	13.9	14.4	14.0	14.3	14.8	15.4	14.8	15.2	15.7	16.4	14.8	15.2	15.7	16.4	14.8	15.2	15.7	16.4	14.8	15.2	15.7	16.4											
		Hi PR	220	237	250	260	247	265	280	292	280	302	319	332	319	344	363	379	359	387	408	426	397	427	451	471	397	427	451	471	397	427	451	471															
1519		Lo PR	108	115	126	134	114	122	133	141	119	126	138	147	125	133	145	154	131	139	152	162	135	144	157	167	135	144	157	167	135	144	157	167	135	144	157	167											
		MBh	36.8	37.6	40.2	43.0	36.0	36.7	39.3	42.0	35.1	35.9	38.3	41.0	34.2	35.0	37.4	40.0	32.5	33.2	35.5	38.0	30.1	30.8	32.9	35.2	30.1	30.8	32.9	35.2	30.1	30.8	32.9	35.2															
1181		S/T	0.85	0.80	0.65	0.49	0.88	0.83	0.67	0.50	0.91	0.85	0.69	0.52	0.93	0.88	0.71	0.53	0.97	0.91	0.74	0.55	0.98	0.92	0.75	0.56	0.98	0.92	0.75	0.56	0.98	0.92	0.75	0.56															
		ΔT	24	23	20	16	25	24	21	16	25	24	21	16	25	24	21	17	25	24	20	16	23	22	19	15	23	22	19	15																			
85		kW	2.84	2.90	2.99	3.08	3.06	3.12	3.22	3.32	3.24	3.31	3.41	3.52	3.41	3.48	3.59	3.71	3.55	3.62	3.74	3.86	3.67	3.75	3.87	3.99	3.67	3.75	3.87	3.99																			
		Amps	10.1	10.3	10.7	11.1	10.9	11.2	11.6	12.0	11.9	12.2	12.6	13.1	12.7	13.1	13.5	14.0	13.6	13.9	14.4	15.0	14.4	14.8	15.3	15.9	14.4	14.8	15.3	15.9																			
1519		Hi PR	213	229	242	253	239	257	272	284	272	293	309	322	310	333	352	367	349	375	396	413	385	414	438	456	385	414	438	456																			
		Lo PR	110	117	128	137	117	124	135	144	121	129	141	150	127	135	148	158	133	142	155	165	138	147	160	171	138	147	160	171																			
1181		MBh	40.6	41.4	43.3	46.2	39.6	40.4	42.3	45.1	38.7	39.4	41.3	44.1	37.7	38.5	40.3	43.0	35.9	36.6	38.3	40.8	33.2	33.9	35.5	37.8	33.2	33.9	35.5	37.8																			
		S/T	0.93	0.89	0.81	0.65	0.96	0.93	0.84	0.68	0.98	0.95	0.86	0.70	1.00	0.98	0.89	0.72	1.00	1.00	0.92	0.75	1.00	1.00	0.93	0.75	1.00	1.00	0.93	0.75																			
85		ΔT	26	25	24	21	26	25	24	21	26	26	24	21	26	26	24	21	24	25	24	21	23	23	22	19	23	23	22	19																			
		kW	2.93	3.00	3.09	3.18	3.15	3.22	3.32	3.43	3.35	3.42	3.53	3.64	3.52	3.59	3.71	3.83	3.66	3.74	3.87	3.99	3.79	3.87	4.00	4.13	3.79	3.87	4.00	4.13																			
1519		Amps	10.4	10.7	11.1	11.5	11.3	11.6	12.0	12.5	12.3	12.7	13.1	13.6	13.2	13.6	14.0	14.6	14.1	14.5	15.0	15.6	15.0	15.4	15.9	16.5	15.0	15.4	15.9	16.5																			
		Hi PR	222	239	252	263	249	268	283	295	283	305	322	336	323	347	367	382	363	391	412	430	401	432	456	475	401	432	456	475																			
1181		Lo PR	109	116	127	135	116	123	134	143	120	128	139	148	126	134	146	156	132	141	153	163	137	145	159	169	137	145	159	169																			
		MBh	37.5	38.2	40.0	42.7	36.6	37.3	39.1	41.7	35.7	36.4	38.1	40.7	34.8	35.5	37.2	39.7	33.1	33.7	35.3	37.7	30.7	31.3	32.7	34.9	30.7	31.3	32.7	34.9																			
85		S/T	0.89	0.86	0.78	0.63	0.93	0.89	0.81	0.65	0.95	0.92	0.83	0.67	0.98	0.95	0.85	0.69	1.00	0.98	0.89	0.72	1.00	0.99	0.89	0.72	1.00	0.99	0.89	0.72																			
		ΔT	26	26	24	21	26	26	25	21	26	26	25	21	27	26	25	21	26	26	24	21	24	24	23	20	24	24	23	20																			
1519		kW	2.87	2.93	3.01	3.11	3.08	3.14	3.24	3.34	3.27	3.34	3.44	3.55	3.43	3.51	3.62	3.74	3.57	3.65	3.77	3.89	3.70	3.78	3.90	4.03	3.70	3.78	3.90	4.03																			
		Amps	10.2	10.4	10.8	11.2	11.0	11.3	11.7	12.1	12.0	12.3	12.7	13.2	12.9	13.2	13.6	14.2	13.7	14.1	14.5	15.1	14.5	14.9	15.4	16.0	14.5	14.9	15.4	16.0																			
85		Hi PR	215	232	245	255	242	260	275	286	275	296	312	326	313	337	356	371	352	379	400	417	389	419	442	461	389	419	442	461																			
		Lo PR	106	113	123	131	112	119	130	139	116	124	135	144	122	130	142	151	128	136	149	159	133	141	154	164	133	141	154	164																			

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects AHRI (TVA) Rating Conditions
 kW = Total system power
 Amps = Outdoor unit amps (compressor + fan)

COOLING DATA — GSZ130481A* /AR*F48601**

IDB		OUTDOOR AMBIENT TEMPERATURE																																			
		65°F						75°F						85°F						95°F						105°F						115°F					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71								
		ENTERING INDOOR WET BULB TEMPERATURE																																			
AIRFLOW		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71								
1800	Mbh	45.1	46.7	51.2	-	44.0	45.6	50.0	-	43.0	44.5	48.8	-	41.9	43.5	47.6	-	39.8	41.3	45.2	-	36.9	38.2	41.9	-	36.9	38.2	41.9	-								
	S/T	0.76	0.63	0.44	-	0.79	0.66	0.46	-	0.81	0.67	0.47	-	0.83	0.70	0.48	-	0.86	0.72	0.50	-	0.87	0.73	0.50	-	0.87	0.73	0.50	-								
	ΔT	17	15	11	-	18	15	12	-	18	15	12	-	18	15	12	-	18	15	12	-	16	14	11	-	16	14	11	-								
	kW	3.33	3.39	3.48	-	3.55	3.62	3.72	-	3.75	3.82	3.93	-	3.92	4.00	4.12	-	4.07	4.15	4.28	-	4.20	4.28	4.41	-	4.20	4.28	4.41	-								
	Amps	11.8	12.1	12.5	-	12.7	13.0	13.5	-	13.8	14.2	14.6	-	14.8	15.2	15.7	-	15.7	16.1	16.7	-	16.7	17.1	17.7	-	16.7	17.1	17.7	-								
70	Hi PR	234	252	266	-	262	282	298	-	298	321	339	-	340	366	386	-	382	411	434	-	422	454	480	-	422	454	480	-								
	Lo PR	111	118	129	-	117	125	136	-	122	129	141	-	128	136	148	-	134	143	156	-	139	147	161	-	139	147	161	-								
	Mbh	43.8	45.4	49.7	-	42.7	44.3	48.5	-	41.7	43.2	47.4	-	40.7	42.2	46.2	-	38.7	40.1	43.9	-	35.8	37.1	40.7	-	35.8	37.1	40.7	-								
	S/T	0.72	0.60	0.42	-	0.75	0.63	0.43	-	0.77	0.64	0.45	-	0.79	0.66	0.46	-	0.82	0.69	0.48	-	0.83	0.69	0.48	-	0.83	0.69	0.48	-								
	ΔT	18	16	12	-	18	16	12	-	18	16	12	-	19	16	12	-	18	16	12	-	17	15	11	-	17	15	11	-								
1400	kW	3.31	3.37	3.46	-	3.53	3.59	3.70	-	3.72	3.79	3.90	-	3.89	3.97	4.09	-	4.04	4.12	4.24	-	4.17	4.25	4.38	-	4.17	4.25	4.38	-								
	Amps	11.7	12.0	12.3	-	12.6	12.9	13.4	-	13.7	14.0	14.5	-	14.7	15.0	15.5	-	15.6	16.0	16.5	-	16.5	16.9	17.5	-	16.5	16.9	17.5	-								
	Hi PR	231	249	263	-	260	279	295	-	295	318	336	-	336	362	382	-	378	407	430	-	418	450	475	-	418	450	475	-								
	Lo PR	110	117	127	-	116	123	135	-	120	128	140	-	127	135	147	-	133	141	154	-	137	146	159	-	137	146	159	-								
	Mbh	40.4	41.9	45.9	-	39.5	40.9	44.8	-	38.5	39.9	43.7	-	37.6	38.9	42.7	-	35.7	37.0	40.5	-	33.1	34.3	37.5	-	33.1	34.3	37.5	-								
75	S/T	0.70	0.58	0.40	-	0.72	0.60	0.42	-	0.74	0.62	0.43	-	0.77	0.64	0.44	-	0.79	0.66	0.46	-	0.80	0.67	0.46	-	0.80	0.67	0.46	-								
	ΔT	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	17	15	11	-	17	15	11	-								
	kW	3.24	3.30	3.39	-	3.45	3.52	3.62	-	3.64	3.71	3.82	-	3.81	3.88	4.00	-	3.95	4.03	4.15	-	4.07	4.15	4.28	-	4.07	4.15	4.28	-								
	Amps	11.4	11.6	12.0	-	12.3	12.6	13.0	-	13.3	13.7	14.1	-	14.3	14.6	15.1	-	15.2	15.5	16.1	-	16.1	16.5	17.0	-	16.1	16.5	17.0	-								
	Hi PR	224	242	255	-	252	271	286	-	286	308	326	-	326	351	371	-	367	395	417	-	406	436	461	-	406	436	461	-								
1800	Lo PR	106	113	124	-	112	120	131	-	117	124	136	-	123	131	143	-	129	137	149	-	133	142	155	-	133	142	155	-								
	Mbh	45.84	47.20	51.09	54.83	44.77	46.10	49.90	53.55	43.71	45.00	48.71	52.28	42.64	43.90	47.52	51.00	40.51	41.71	45.15	48.45	37.52	38.64	41.82	44.88	37.52	38.64	41.82	44.88								
	S/T	0.86	0.77	0.58	0.38	0.89	0.80	0.61	0.39	0.92	0.82	0.62	0.40	0.95	0.85	0.64	0.41	0.98	0.88	0.66	0.43	0.99	0.89	0.67	0.43	0.99	0.89	0.67	0.43								
	ΔT	20	19	15	11	20	19	15	11	20	19	15	11	21	19	16	11	20	19	15	11	19	17	14	10	19	17	14	10								
	kW	3.35	3.41	3.51	3.61	3.58	3.65	3.75	3.86	3.78	3.85	3.96	4.08	3.95	4.03	4.15	4.27	4.10	4.18	4.31	4.44	4.23	4.32	4.45	4.58	4.23	4.32	4.45	4.58								
1600	Amps	11.9	12.2	12.6	13.0	12.9	13.2	13.6	14.1	14.0	14.3	14.8	15.3	14.9	15.3	15.8	16.4	15.9	16.3	16.8	17.5	16.8	17.3	17.8	18.5	16.8	17.3	17.8	18.5								
	Hi PR	236	254	268	280	265	285	301	314	301	324	342	357	343	369	390	407	386	415	439	458	427	459	485	506	427	459	485	506								
	Lo PR	112	119	130	138	118	126	137	146	123	131	143	152	129	137	150	160	135	144	157	167	140	149	163	173	140	149	163	173								
	Mbh	44.5	45.8	49.6	53.2	43.5	44.8	48.4	52.0	42.4	43.7	47.3	50.8	41.4	42.6	46.1	49.5	39.3	40.5	43.8	47.0	36.4	37.5	40.6	43.6	36.4	37.5	40.6	43.6								
	S/T	0.82	0.74	0.56	0.36	0.85	0.76	0.58	0.37	0.87	0.78	0.59	0.38	0.90	0.81	0.61	0.39	0.94	0.84	0.63	0.41	0.94	0.84	0.64	0.41	0.94	0.84	0.64	0.41								
1400	ΔT	21	19	16	11	21	20	16	11	21	20	16	11	21	20	16	11	21	20	16	11	20	18	15	10	20	18	15	10								
	kW	3.33	3.39	3.48	3.58	3.55	3.62	3.72	3.83	3.75	3.82	3.93	4.05	3.92	4.00	4.12	4.24	4.07	4.15	4.28	4.41	4.20	4.28	4.41	4.55	4.20	4.28	4.41	4.55								
	Amps	11.8	12.1	12.5	12.9	12.7	13.0	13.5	14.0	13.8	14.2	14.6	15.2	14.8	15.2	15.7	16.3	15.7	16.1	16.7	17.3	16.7	17.1	17.7	18.4	16.7	17.1	17.7	18.4								
	Hi PR	234	252	266	277	262	282	298	311	298	321	339	354	340	366	386	403	382	411	434	453	422	454	480	501	422	454	480	501								
	Lo PR	111	118	129	137	117	125	136	145	122	129	141	151	128	136	149	158	134	143	156	166	139	147	161	171	139	147	161	171								
1400	Mbh	41.1	42.3	45.8	49.1	40.1	41.3	44.7	48.0	39.2	40.3	43.7	46.8	38.2	39.34	42.6	45.7	36.3	37.4	40.5	43.4	33.6	34.6	37.5	40.2	33.6	34.6	37.5	40.2								
	S/T	0.79	0.71	0.54	0.35	0.82	0.74	0.56	0.36	0.84	0.75	0.57	0.37	0.87	0.78	0.59	0.38	0.90	0.81	0.61	0.39	0.91	0.81	0.62	0.40	0.91	0.81	0.62	0.40								
	ΔT	21	20	16	11	22	20	16	11	22	20	16	11	22	20	16	11	22	20	16	11	22	20	15	10	20	19	15	10								
	kW	3.26	3.32	3.41	3.51	3.48	3.54	3.64	3.75	3.67	3.74	3.85	3.96	3.84	3.91	4.03	4.15	3.98	4.06	4.18	4.31	4.10	4.19	4.31	4.44	4.10	4.19	4.31	4.44								
	Amps	11.5	11.7	12.1	12.6	12.4	12.7	13.1	13.6	13.5	13.8	14.2	14.8	14.4	14.7	15.2	15.8	15.3	15.7	16.2	16.8	16.2	16.6	17.2	17.8	16.2	16.6	17.2	17.8								
1400	Hi PR	227	244	258	269	254	274	289	302	289	311	329	343	330	355	375	391	371	399	421	439	410	441	466	486	410	441	466	486								
	Lo PR	108	114	125	133	114	121	132	141	118	126	137	146	124	132	144	153	130	138	151	161	134	143	156	166	134	143	156	166								

IDB: Entering indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects ACCA (TVA) Rating Conditions
 kW = Total system power
 Amps = Outdoor unit amps (compressor + fan)

COOLING DATA — GSZ130481A* /AR*F48601** (CONT.)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE											
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
1800	MBh	46.66	47.67	50.93	54.45	45.57	46.57	49.75	53.18	44.49	45.46	48.56	51.92	43.40	44.35	47.38	50.65	41.23	42.13	45.01	48.12	38.19	39.03	41.69	44.57
	S/T	0.95	0.89	0.72	0.54	1.00	0.92	0.75	0.56	1.00	0.94	0.77	0.57	1.00	1.00	0.79	0.59	1.00	1.00	0.82	0.61	1.00	1.00	0.83	0.62
	ΔT	23	22	19	15	23	22	19	15	23	22	19	15	22	23	19	15	21	22	19	15	20	20	18	14
	kW	3.38	3.44	3.53	3.63	3.60	3.67	3.78	3.89	3.80	3.88	3.99	4.11	3.98	4.06	4.18	4.31	4.13	4.22	4.34	4.48	4.26	4.35	4.48	4.62
	Amps	12.0	12.3	12.7	13.2	13.0	13.3	13.7	14.2	14.1	14.4	14.9	15.5	15.1	15.4	16.0	16.6	16.0	16.4	17.0	17.6	17.0	17.4	18.0	18.7
	Hi PR	238	257	271	283	268	288	304	317	304	328	346	361	347	373	394	411	390	420	443	462	431	464	490	511
	Lo PR	113	120	131	140	119	127	139	148	124	132	144	154	130	139	152	161	137	145	159	169	141	150	164	175
	MBh	45.3	46.3	49.5	52.9	44.2	45.2	48.3	51.6	43.2	44.1	47.2	50.4	42.1	43.1	46.0	49.2	40.0	40.9	43.7	46.7	37.1	37.9	40.5	43.3
	S/T	0.90	0.85	0.69	0.51	0.94	0.88	0.71	0.53	0.96	0.90	0.73	0.55	0.99	0.93	0.76	0.56	1.00	0.96	0.78	0.59	1.00	0.97	0.79	0.59
	ΔT	23	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	23	23	20	16	21	21	18	15
kW	3.35	3.41	3.51	3.61	3.58	3.65	3.75	3.86	3.78	3.85	3.96	4.08	3.95	4.03	4.15	4.28	4.10	4.18	4.31	4.44	4.23	4.32	4.45	4.58	
Amps	11.9	12.2	12.6	13.0	12.9	13.2	13.6	14.1	14.0	14.3	14.8	15.3	14.9	15.3	15.8	16.4	15.9	16.3	16.8	17.5	16.8	17.3	17.8	18.5	
Hi PR	236	254	268	280	265	285	301	314	301	324	342	357	343	369	390	407	386	415	439	458	427	459	485	506	
Lo PR	112	119	130	139	118	126	137	146	123	131	143	152	129	137	150	160	135	144	157	167	140	149	163	173	
MBh	41.8	42.7	45.6	48.8	40.8	41.7	44.6	47.7	39.9	40.7	43.5	46.5	38.9	39.7	42.5	45.4	36.9	37.8	40.3	43.1	34.2	35.0	37.4	39.9	
S/T	0.87	0.82	0.66	0.50	0.90	0.85	0.69	0.51	0.92	0.87	0.71	0.53	0.95	0.90	0.73	0.54	0.99	0.93	0.76	0.57	1.00	0.94	0.76	0.57	
ΔT	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	22	22	19	15	
kW	3.28	3.34	3.43	3.53	3.50	3.57	3.67	3.77	3.69	3.77	3.87	3.99	3.87	3.94	4.06	4.18	4.01	4.09	4.21	4.34	4.14	4.22	4.34	4.48	
Amps	11.6	11.8	12.2	12.7	12.5	12.8	13.2	13.7	13.6	13.9	14.4	14.9	14.5	14.9	15.4	16.0	15.5	15.8	16.4	17.0	16.4	16.8	17.3	18.0	
Hi PR	229	246	260	271	257	277	292	305	292	315	332	346	333	358	378	395	375	403	426	444	414	445	470	490	
Lo PR	109	116	126	134	115	122	133	142	119	127	139	148	125	133	146	155	131	140	152	162	136	144	158	168	
1800	MBh	47.47	48.39	50.68	54.07	46.37	47.26	49.50	52.81	45.26	46.14	48.32	51.55	44.16	45.01	47.14	50.29	41.95	42.76	44.79	47.78	38.86	39.61	41.49	44.26
	S/T	0.99	0.96	0.86	0.70	1.00	0.99	0.90	0.73	1.00	1.00	0.92	0.74	1.00	1.00	0.95	0.77	1.00	1.00	0.98	0.80	1.00	1.00	0.99	0.80
	ΔT	24	24	22	19	24	24	23	20	23	24	23	20	23	23	23	20	21	22	22	19	20	20	21	18
	kW	3.40	3.46	3.56	3.66	3.63	3.70	3.80	3.92	3.83	3.91	4.02	4.14	4.01	4.09	4.21	4.34	4.16	4.25	4.38	4.51	4.30	4.38	4.52	4.66
	Amps	12.1	12.4	12.8	13.3	13.1	13.4	13.9	14.4	14.2	14.6	15.1	15.6	15.2	15.6	16.1	16.7	16.2	16.6	17.1	17.8	17.2	17.6	18.2	18.9
	Hi PR	241	259	274	285	270	291	307	320	307	331	349	364	350	377	398	415	394	424	448	467	435	468	495	516
	Lo PR	114	122	133	141	121	128	140	149	125	133	146	155	132	140	153	163	138	147	160	171	143	152	166	177
	MBh	46.1	47.0	49.2	52.5	45.0	45.9	48.1	51.3	43.9	44.8	46.9	50.1	42.9	43.7	45.8	48.8	40.7	41.5	43.5	46.4	37.7	38.5	40.3	43.0
	S/T	0.95	0.91	0.82	0.67	0.98	0.95	0.85	0.69	1.00	0.97	0.88	0.71	1.00	1.00	0.90	0.73	1.00	1.00	0.94	0.76	1.00	1.00	0.95	0.77
	ΔT	25	25	23	20	25	25	24	20	25	25	24	20	25	25	24	20	23	24	23	20	22	22	22	19
kW	3.38	3.44	3.53	3.63	3.60	3.67	3.78	3.89	3.80	3.88	3.99	4.11	3.98	4.06	4.18	4.31	4.13	4.22	4.34	4.48	4.26	4.35	4.48	4.62	
Amps	12.0	12.3	12.7	13.2	13.0	13.3	13.7	14.2	14.1	14.4	14.9	15.5	15.1	15.4	16.0	16.6	16.0	16.4	17.0	17.6	17.0	17.4	18.0	18.7	
Hi PR	238	257	271	283	268	288	304	317	304	328	346	361	347	373	394	411	390	420	443	462	431	464	490	511	
Lo PR	113	120	131	140	119	127	139	148	124	132	144	154	130	139	152	161	137	145	159	169	141	150	164	175	
MBh	42.5	43.4	45.4	48.5	41.5	42.4	44.4	47.3	40.6	41.3	43.3	46.2	39.6	40.3	42.2	45.1	37.6	38.3	40.1	42.8	34.8	35.5	37.2	39.7	
S/T	0.91	0.88	0.79	0.64	0.95	0.91	0.82	0.67	0.97	0.94	0.84	0.68	1.00	0.97	0.87	0.71	1.00	1.00	0.90	0.73	1.00	1.00	0.91	0.74	
ΔT	25	25	24	21	26	25	24	21	26	25	24	21	26	26	24	21	25	25	24	21	23	23	22	19	
kW	3.31	3.37	3.46	3.56	3.53	3.59	3.69	3.80	3.72	3.79	3.90	4.02	3.89	3.97	4.09	4.21	4.04	4.12	4.24	4.37	4.17	4.25	4.38	4.51	
Amps	11.7	12.0	12.3	12.8	12.6	12.9	13.3	13.8	13.7	14.0	14.5	15.1	14.7	15.0	15.5	16.1	15.6	16.0	16.5	17.1	16.5	16.9	17.5	18.2	
Hi PR	231	249	263	274	260	279	295	308	295	318	335	350	336	362	382	399	378	407	430	448	418	450	475	495	
Lo PR	110	117	127	136	116	123	135	143	120	128	140	149	127	135	147	157	133	141	154	164	137	146	159	170	

IDB: Entering indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects AHRH (TVA) Rating Conditions
 kW = Total system power
 Amps = Outdoor unit amps (compressor + fan)

COOLING DATA — GSZ130601A* / AR*F48601**

IDB		OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE											
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
2025	Mbh	55.9	57.9	63.4	-	54.6	56.5	62.0	-	53.3	55.2	60.5	-	52.0	53.9	59.0	-	49.4	51.2	56.1	-	45.7	47.4	51.9	-
	S/T	0.75	0.63	0.44	-	0.78	0.65	0.45	-	0.80	0.67	0.46	-	0.83	0.69	0.48	-	0.86	0.72	0.50	-	0.86	0.72	0.50	-
	ΔT	19	17	13	-	19	17	13	-	19	17	13	-	19	17	13	-	19	17	13	-	18	16	12	-
	kW	4.11	4.19	4.31	-	4.40	4.49	4.62	-	4.66	4.75	4.90	-	4.88	4.99	5.14	-	5.08	5.18	5.34	-	5.24	5.35	5.52	-
	Amps	14.5	14.8	15.3	-	15.7	16.1	16.6	-	17.1	17.5	18.1	-	18.3	18.7	19.3	-	19.4	19.9	20.6	-	20.6	21.1	21.9	-
	Hi PR	225	242	255	-	252	271	287	-	287	309	326	-	327	352	371	-	367	395	418	-	406	437	461	-
	Lo PR	102	108	118	-	108	115	125	-	112	119	130	-	118	125	137	-	123	131	143	-	127	136	148	-
	Mbh	54.2	56.2	61.6	-	53.0	54.9	60.1	-	51.7	53.6	58.7	-	50.4	52.3	57.3	-	47.9	49.7	54.4	-	44.4	46.0	50.4	-
	S/T	0.72	0.60	0.42	-	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.79	0.66	0.46	-	0.82	0.68	0.47	-	0.82	0.69	0.48	-
	ΔT	20	17	13	-	20	17	13	-	20	17	13	-	20	18	14	-	20	17	13	-	19	16	12	-
	kW	4.08	4.16	4.28	-	4.37	4.46	4.59	-	4.62	4.72	4.86	-	4.85	4.95	5.10	-	5.04	5.14	5.30	-	5.20	5.31	5.48	-
	Amps	14.4	14.7	15.2	-	15.5	15.9	16.5	-	16.9	17.3	17.9	-	18.1	18.5	19.2	-	19.3	19.7	20.4	-	20.4	20.9	21.7	-
Hi PR	222	239	253	-	250	269	284	-	284	306	323	-	323	348	368	-	364	392	413	-	402	433	457	-	
Lo PR	101	107	117	-	107	113	124	-	111	118	129	-	116	124	135	-	122	130	142	-	126	134	147	-	
Mbh	50.1	51.9	56.8	-	48.9	50.7	55.5	-	47.7	49.5	54.2	-	46.6	48.3	52.9	-	44.2	45.8	50.2	-	41.0	42.5	46.5	-	
S/T	0.69	0.58	0.40	-	0.72	0.60	0.42	-	0.74	0.61	0.43	-	0.76	0.63	0.44	-	0.79	0.66	0.46	-	0.80	0.66	0.46	-	
ΔT	20	18	13	-	20	18	13	-	21	18	13	-	21	18	14	-	20	18	13	-	19	16	12	-	
kW	3.99	4.07	4.18	-	4.27	4.35	4.48	-	4.52	4.61	4.75	-	4.73	4.83	4.98	-	4.92	5.02	5.18	-	5.08	5.19	5.35	-	
Amps	14.0	14.3	14.8	-	15.1	15.5	16.0	-	16.4	16.8	17.4	-	17.6	18.0	18.6	-	18.7	19.2	19.8	-	19.9	20.4	21.0	-	
Hi PR	216	232	245	-	242	261	275	-	275	296	313	-	314	338	356	-	353	380	401	-	390	420	443	-	
Lo PR	98	104	114	-	103	110	120	-	108	114	125	-	113	120	131	-	118	126	137	-	122	130	142	-	
2025	Mbh	56.80	58.48	63.30	67.94	55.48	57.12	61.83	66.36	54.16	55.76	60.36	64.78	52.84	54.40	58.89	63.20	50.20	51.68	55.94	60.04	46.50	47.87	51.82	55.62
	S/T	0.86	0.77	0.58	0.37	0.89	0.79	0.60	0.39	0.91	0.81	0.62	0.40	0.94	0.84	0.64	0.41	0.97	0.87	0.66	0.42	0.98	0.88	0.67	0.43
	ΔT	22	20	17	12	22	21	17	12	22	21	17	12	23	21	17	12	22	20	17	12	21	19	16	11
	kW	4.14	4.22	4.34	4.47	4.43	4.52	4.66	4.80	4.69	4.79	4.94	5.09	4.92	5.02	5.18	5.34	5.12	5.22	5.39	5.56	5.29	5.40	5.57	5.75
	Amps	14.6	15.0	15.5	16.1	15.8	16.2	16.8	17.4	17.2	17.7	18.2	18.9	18.4	18.9	19.5	20.3	19.6	20.1	20.8	21.6	20.8	21.3	22.1	22.9
	Hi PR	227	244	258	269	255	274	289	302	290	312	329	343	330	355	375	391	371	399	422	440	410	441	466	486
	Lo PR	103	110	120	127	109	116	126	135	113	120	131	140	119	126	138	147	125	132	145	154	129	137	150	159
	Mbh	55.1	56.8	61.5	66.0	53.9	55.5	60.0	64.4	52.6	54.1	58.6	62.9	51.3	52.8	57.2	61.4	48.7	50.2	54.3	58.3	45.1	46.5	50.3	54.0
	S/T	0.82	0.73	0.55	0.36	0.85	0.76	0.57	0.37	0.87	0.78	0.59	0.38	0.90	0.80	0.61	0.39	0.93	0.83	0.63	0.40	0.94	0.84	0.63	0.41
	ΔT	23	21	17	12	23	21	18	12	23	21	18	12	23	21	18	12	23	21	17	12	22	20	16	11
	kW	4.11	4.19	4.31	4.44	4.40	4.49	4.62	4.76	4.66	4.75	4.90	5.05	4.89	4.99	5.14	5.30	5.08	5.18	5.34	5.51	5.24	5.35	5.52	5.70
	Amps	14.5	14.8	15.3	15.9	15.7	16.1	16.6	17.2	17.1	17.5	18.1	18.8	18.3	18.7	19.3	20.1	19.5	19.9	20.6	21.4	20.6	21.1	21.9	22.7
Hi PR	225	242	255	266	252	271	287	299	287	309	326	340	327	352	371	387	368	396	418	436	406	437	461	481	
Lo PR	102	108	118	126	108	115	125	133	112	119	130	139	118	125	137	146	123	131	143	152	128	136	148	158	
Mbh	50.9	52.4	56.7	60.9	49.7	51.2	55.4	59.5	48.5	50.0	54.1	58.1	47.3	48.75	52.8	56.6	45.0	46.3	50.1	53.8	41.7	42.9	46.4	49.8	
S/T	0.79	0.70	0.53	0.34	0.82	0.73	0.55	0.36	0.84	0.75	0.57	0.36	0.86	0.77	0.58	0.38	0.90	0.80	0.61	0.39	0.90	0.81	0.61	0.39	
ΔT	23	22	18	12	24	22	18	12	24	22	18	12	24	22	18	12	24	22	18	12	22	20	17	11	
kW	4.02	4.10	4.22	4.34	4.30	4.39	4.52	4.65	4.55	4.64	4.78	4.93	4.77	4.87	5.02	5.17	4.96	5.06	5.22	5.38	5.12	5.23	5.39	5.56	
Amps	14.1	14.4	14.9	15.5	15.3	15.6	16.1	16.8	16.6	17.0	17.6	18.2	17.7	18.2	18.8	19.5	18.9	19.4	20.0	20.8	20.0	20.5	21.2	22.1	
Hi PR	218	235	248	258	245	263	278	290	278	299	316	330	317	341	360	376	357	384	405	423	394	424	448	467	
Lo PR	99	105	115	122	105	111	121	129	109	116	126	134	114	121	133	141	120	127	139	148	124	132	144	153	

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects ACCA (TVA) Rating Conditions
 kW = Total system power
 Amps = Outdoor unit amps (compressor + fan)

COOLING DATA — GSZ130601A* / AR*F48601** (CONT.)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE											
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	MBh	57.81	59.07	63.11	67.47	56.47	57.70	61.65	65.90	55.12	56.33	60.18	64.33	53.78	54.95	58.71	62.76	51.09	52.20	55.77	59.62	47.32	48.36	51.66	55.23
	S/T	0.94	0.88	0.72	0.54	1.00	0.91	0.74	0.56	1.00	0.94	0.76	0.57	1.00	0.97	0.79	0.59	1.00	1.00	0.82	0.61	1.00	1.00	0.82	0.62
	ΔT	25	24	21	16	26	24	21	17	25	24	21	17	24	24	21	17	23	24	21	17	21	22	19	15
	KW	4.17	4.25	4.38	4.51	4.47	4.56	4.69	4.84	4.73	4.83	4.97	5.13	4.96	5.06	5.22	5.39	5.16	5.27	5.43	5.60	5.33	5.44	5.61	5.79
	Amps	14.8	15.1	15.6	16.2	16.0	16.4	16.9	17.6	17.4	17.8	18.4	19.1	18.6	19.1	19.7	20.5	19.8	20.3	21.0	21.8	21.0	21.5	22.3	23.1
	Hi PR	229	247	261	272	257	277	292	305	293	315	333	347	333	359	379	395	375	404	426	444	414	446	471	491
	Lo PR	104	111	121	129	110	117	128	136	114	122	133	141	120	128	139	148	126	134	146	156	130	138	151	161
	MBh	56.1	57.4	61.3	65.5	54.8	56.0	59.9	64.0	53.5	54.7	58.4	62.5	52.2	53.4	57.0	60.9	49.6	50.7	54.2	57.9	45.9	46.9	50.2	53.6
	S/T	0.90	0.84	0.68	0.51	0.93	0.87	0.71	0.53	0.95	0.89	0.73	0.54	0.98	0.92	0.75	0.56	1.00	0.96	0.78	0.58	1.00	0.96	0.78	0.59
	ΔT	26	25	21	17	26	25	22	17	26	25	22	17	26	25	22	17	25	25	22	17	23	23	20	16
KW	4.14	4.22	4.34	4.47	4.43	4.52	4.66	4.80	4.69	4.79	4.94	5.09	4.92	5.03	5.18	5.34	5.12	5.23	5.39	5.56	5.29	5.40	5.57	5.75	
Amps	14.6	15.0	15.5	16.1	15.8	16.2	16.8	17.4	17.2	17.7	18.2	18.9	18.4	18.9	19.5	20.3	19.6	20.1	20.8	21.6	20.8	21.3	22.1	22.9	
Hi PR	227	244	258	269	255	274	290	302	290	312	329	343	330	355	375	391	371	400	422	440	410	441	466	486	
Lo PR	103	110	120	127	109	116	126	135	113	120	131	140	119	126	138	147	125	132	145	154	129	137	150	159	
MBh	51.8	52.9	56.6	60.5	50.6	51.7	55.2	59.1	49.4	50.5	53.9	57.6	48.2	49.2	52.6	56.2	45.8	46.8	50.0	53.4	42.4	43.3	46.3	49.5	
S/T	0.86	0.81	0.66	0.49	0.90	0.84	0.68	0.51	0.92	0.86	0.70	0.52	0.95	0.89	0.72	0.54	0.98	0.92	0.75	0.56	0.99	0.93	0.76	0.57	
ΔT	26	25	22	17	26	25	22	18	26	25	22	18	27	26	22	18	26	25	22	17	25	24	20	16	
KW	4.05	4.13	4.25	4.37	4.33	4.42	4.55	4.69	4.59	4.68	4.82	4.97	4.81	4.91	5.06	5.22	5.00	5.10	5.26	5.43	5.16	5.27	5.43	5.61	
Amps	14.2	14.6	15.1	15.6	15.4	15.8	16.3	16.9	16.7	17.2	17.7	18.4	17.9	18.4	19.0	19.7	19.1	19.6	20.2	21.0	20.2	20.7	21.4	22.3	
Hi PR	220	237	250	261	247	266	281	293	281	302	319	333	320	344	364	379	360	388	409	427	398	428	452	472	
Lo PR	100	106	116	124	106	112	123	131	110	117	127	136	115	123	134	143	121	129	140	149	125	133	145	155	
85	MBh	58.82	59.96	62.80	67.00	57.45	58.57	61.34	65.44	56.09	57.17	59.88	63.88	54.72	55.78	58.42	62.32	51.98	52.99	55.50	59.21	48.15	49.08	51.41	54.84
	S/T	0.98	0.95	0.86	0.70	1.00	0.98	0.89	0.72	1.00	1.00	0.91	0.74	1.00	1.00	0.94	0.76	1.00	1.00	0.98	0.79	1.00	1.00	0.98	0.80
	ΔT	26	26	24	21	26	26	25	21	25	26	25	21	25	25	25	22	24	24	25	21	22	22	23	20
	KW	4.20	4.28	4.41	4.54	4.50	4.59	4.73	4.87	4.77	4.86	5.01	5.17	5.00	5.10	5.26	5.43	5.20	5.31	5.47	5.65	5.37	5.48	5.66	5.84
	Amps	14.9	15.3	15.8	16.4	16.1	16.5	17.1	17.7	17.5	18.0	18.6	19.3	18.8	19.2	19.9	20.7	20.0	20.5	21.2	22.0	21.2	21.7	22.5	23.4
	Hi PR	232	249	263	275	260	280	295	308	296	318	336	350	337	362	383	399	379	408	430	449	418	450	475	496
	Lo PR	105	112	122	130	111	118	129	137	115	123	134	143	121	129	141	150	127	135	148	157	131	140	153	163
	MBh	57.1	58.2	61.0	65.0	55.8	56.9	59.6	63.5	54.5	55.5	58.1	62.0	53.1	54.2	56.7	60.5	50.5	51.4	53.9	57.5	46.7	47.7	49.9	53.2
	S/T	0.94	0.91	0.82	0.66	0.97	0.94	0.85	0.69	1.00	0.96	0.87	0.71	1.00	0.99	0.90	0.73	1.00	1.00	0.93	0.76	1.00	1.00	0.94	0.76
	ΔT	27	27	25	22	28	27	26	22	28	27	26	22	27	27	26	22	26	26	26	22	24	24	24	21
KW	4.17	4.25	4.38	4.51	4.47	4.56	4.69	4.84	4.73	4.83	4.97	5.13	4.96	5.06	5.22	5.39	5.16	5.27	5.43	5.60	5.33	5.44	5.61	5.79	
Amps	14.8	15.1	15.6	16.2	16.0	16.4	16.9	17.6	17.4	17.8	18.4	19.1	18.6	19.1	19.7	20.5	19.8	20.3	21.0	21.8	21.0	21.5	22.3	23.1	
Hi PR	229	247	261	272	257	277	292	305	293	315	333	347	333	359	379	395	375	404	426	444	414	446	471	491	
Lo PR	104	111	121	129	110	117	128	136	114	122	133	141	120	128	139	148	126	134	146	156	130	138	151	161	
MBh	52.7	53.7	56.3	60.0	51.5	52.5	55.0	58.6	50.3	51.2	53.7	57.2	49.0	50.0	52.3	55.8	46.6	47.5	49.7	53.1	43.1	44.0	46.1	49.1	
S/T	0.91	0.87	0.79	0.64	0.94	0.91	0.82	0.66	0.96	0.93	0.84	0.68	0.99	0.96	0.86	0.70	1.00	0.99	0.90	0.73	1.00	1.00	0.91	0.73	
ΔT	28	27	26	22	28	28	26	23	28	28	26	23	28	28	26	23	27	28	26	23	25	26	24	21	
KW	4.08	4.16	4.28	4.41	4.37	4.45	4.59	4.73	4.62	4.72	4.86	5.01	4.85	4.95	5.10	5.26	5.04	5.14	5.30	5.47	5.20	5.31	5.48	5.65	
Amps	14.4	14.7	15.2	15.8	15.5	15.9	16.5	17.1	16.9	17.3	17.9	18.6	18.1	18.5	19.2	19.9	19.3	19.7	20.4	21.2	20.4	20.9	21.7	22.5	
Hi PR	222	239	253	264	250	269	284	296	284	305	323	336	323	348	367	383	364	391	413	431	402	432	457	476	
Lo PR	101	107	117	125	107	113	124	132	111	118	129	137	116	124	135	144	122	130	142	151	126	134	147	156	

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects AHR1 (TVA) Rating Conditions
 KW = Total system power
 Amps = Outdoor unit amps (compressor + fan)

HEATING DATA

GSZ130181A* / AR*F182416**

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	21.4	20.2	19.0	17.8	17.0	16.5	15.3	14.1	13.3	12.3	11.3	10.7	10.3	9.2	8.2	7.2	6.1	5.0
ΔT	33.0	31.2	29.4	27.5	26.2	25.4	23.6	21.8	20.6	19.0	17.5	16.5	15.9	14.3	12.7	11.0	9.4	7.7
kW	1.68	1.64	1.61	1.58	1.6	1.54	1.51	1.48	1.46	1.42	1.39	1.37	1.36	1.32	1.29	1.26	1.23	1.19
Amps	7.3	6.7	6.3	5.9	5.7	5.6	5.3	5.0	4.8	4.6	4.3	4.2	4.2	4.0	3.7	3.5	3.2	2.9
COP	3.73	3.60	3.46	3.30	3.19	3.12	2.96	2.79	2.68	2.53	2.39	2.29	2.22	2.04	1.86	1.66	1.46	1.22
EER	12.8	12.3	11.8	11.3	10.9	10.7	10.1	9.5	9.2	8.7	8.2	7.8	7.6	7.0	6.3	5.7	5.0	4.2
Hi PR	392	375	361	345	337	331	318	305	292	279	268	262	257	247	238	228	220	212
Lo PR	145	134	126	115	109	105	96	86	77	69	61	57	55	46	40	34	29	23

GSZ130241B* / AR*F182416**

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	28.9	27.4	25.8	24.1	23.0	22.3	20.7	19.1	16.9	15.6	14.3	13.6	13.0	11.7	10.4	9.1	7.7	6.3
ΔT	33.5	31.7	29.8	27.9	26.6	25.8	24.0	22.1	19.5	18.0	16.6	15.7	15.1	13.6	12.0	10.5	8.9	7.3
kW	2.17	2.12	2.08	2.04	2.0	2.00	1.96	1.91	1.80	1.76	1.72	1.70	1.68	1.64	1.60	1.57	1.52	1.49
Amps	10.1	9.3	8.7	8.2	7.9	7.7	7.3	6.9	6.6	6.3	6.0	5.9	5.8	5.5	5.2	4.9	4.5	4.0
COP	3.91	3.77	3.62	3.46	3.34	3.27	3.10	2.92	2.74	2.59	2.44	2.33	2.27	2.08	1.89	1.69	1.48	1.25
EER	13.3	12.9	12.4	11.8	11.4	11.2	10.6	10.0	9.4	8.8	8.3	8.0	7.7	7.1	6.5	5.8	5.1	4.3
Hi PR	413	395	380	364	355	348	335	321	308	294	282	275	271	260	250	240	231	223
Lo PR	131	122	114	105	99	95	88	78	70	63	55	51	50	42	36	30	27	21

GSZ130301A* / AR*F30301**

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	33.2	31.4	29.6	27.6	26.4	25.6	23.8	21.9	19.9	18.4	16.9	16.0	15.4	13.8	12.3	10.7	9.1	7.5
ΔT	29.3	27.7	26.1	24.4	23.3	22.6	21.0	19.3	17.6	16.2	14.9	14.1	13.6	12.2	10.8	9.4	8.0	6.6
kW	2.52	2.47	2.42	2.37	2.3	2.32	2.28	2.23	2.37	2.32	2.26	2.23	2.21	2.16	2.11	2.05	2.00	1.95
Amps	9.7	9.0	8.5	8.0	7.7	7.6	7.2	6.9	6.6	6.3	6.0	5.9	5.8	5.6	5.2	5.0	4.6	4.2
COP	3.86	3.72	3.57	3.41	3.29	3.22	3.05	2.88	2.46	2.32	2.19	2.10	2.04	1.88	1.70	1.52	1.34	1.12
EER	13.2	12.7	12.2	11.6	11.3	11.0	10.4	9.8	8.4	7.9	7.5	7.2	7.0	6.4	5.8	5.2	4.6	3.8
Hi PR	366	351	337	323	315	309	297	285	273	261	250	244	240	231	222	213	205	198
Lo PR	129	119	112	103	97	93	86	76	69	62	54	50	49	41	35	30	26	20

GSZ130361B* / AR*F364216**

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	42.0	39.7	37.4	35.0	33.4	32.4	30.1	27.7	24.8	22.9	21.1	19.9	19.2	17.2	15.3	13.3	11.4	9.3
ΔT	38.4	36.4	34.2	32.0	30.6	29.6	27.5	25.4	22.7	21.0	19.3	18.2	17.6	15.8	14.0	12.2	10.4	8.5
kW	2.72	2.68	2.63	2.58	2.55	2.53	2.48	2.43	2.31	2.26	2.21	2.19	2.17	2.12	2.08	2.03	1.98	1.94
Amps	14.7	13.7	12.8	12.1	11.7	11.5	10.8	10.3	9.9	9.5	9.0	8.8	8.7	8.3	7.8	7.3	6.8	6.2
COP	4.01	3.86	3.69	3.51	3.38	3.30	3.12	2.93	2.75	2.58	2.42	2.31	2.24	2.05	1.85	1.64	1.43	1.20
EER	13.64	13.12	12.55	11.93	11.51	11.23	10.60	9.95	9.34	8.78	8.23	7.85	7.62	6.97	6.29	5.59	4.87	4.07
Hi PR	413	396	381	364	355	349	335	322	308	294	283	276	271	261	251	240	232	224
Lo PR	135	125	118	108	102	98	90	80	72	65	57	53	51	43	37	31	27	22

High pressure is measured at the suction service valve (the larger valve).
 Low pressure is measured at the gauge port connection.
 Calculations are based on nominal CFM and 70 °F indoor dry bulb.

Amps = Outdoor unit amps (comp.+fan)
 kW = Total system power

HEATING DATA (CONT.)

GSZ130421A* / AR*F36421**

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	50.3	47.6	44.8	41.9	40.0	38.8	36.0	33.2	29.9	27.6	25.4	24.0	23.1	20.7	18.4	16.0	13.7	11.2
ΔT	34.5	32.6	30.7	28.7	27.4	26.6	24.7	22.8	20.5	18.9	17.4	16.5	15.9	14.2	12.6	11.0	9.4	7.7
kW	3.60	3.53	3.46	3.39	3.4	3.32	3.25	3.18	3.24	3.16	3.09	3.05	3.02	2.95	2.88	2.80	2.73	2.66
Amps	16.9	15.6	14.5	13.6	13.1	12.9	12.1	11.5	10.9	10.4	9.9	9.7	9.5	9.0	8.4	7.9	7.2	6.4
COP	4.09	3.95	3.79	3.62	3.49	3.42	3.24	3.05	2.70	2.55	2.40	2.30	2.24	2.06	1.87	1.67	1.47	1.23
EER	14.0	13.5	12.9	12.4	11.9	11.7	11.1	10.4	9.2	8.7	8.2	7.9	7.6	7.0	6.4	5.7	5.0	4.2
Hi PR	368	353	340	325	317	311	299	287	275	262	252	246	242	232	223	214	207	199
Lo PR	129	119	112	103	97	93	86	76	69	62	54	50	49	41	35	30	26	20

GSZ130481A* / AR*F48601**

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	55.3	52.4	49.3	46.1	44.0	42.6	39.6	36.5	33.6	31.1	28.6	27.0	26.0	23.3	20.7	18.0	15.4	12.6
ΔT	32.0	30.3	28.5	26.7	25.5	24.7	22.9	21.1	19.5	18.0	16.5	15.6	15.0	13.5	12.0	10.4	8.9	7.3
kW	3.93	3.87	3.80	3.73	3.7	3.66	3.59	3.52	3.37	3.30	3.23	3.19	3.17	3.10	3.04	2.97	2.90	2.84
Amps	18.2	16.8	15.7	14.8	14.3	14.0	13.2	12.5	12.0	11.4	10.9	10.6	10.5	9.9	9.3	8.7	8.1	7.3
COP	4.11	3.96	3.80	3.62	3.49	3.41	3.23	3.03	2.93	2.76	2.59	2.47	2.40	2.20	1.99	1.78	1.55	1.30
EER	14.1	13.5	13.0	12.4	11.9	11.7	11.0	10.4	10.0	9.4	8.8	8.5	8.2	7.5	6.8	6.1	5.3	4.4
Hi PR	380	364	350	335	327	321	308	296	284	271	260	254	249	240	231	221	213	206
Lo PR	129	119	112	103	97	93	86	76	69	62	54	50	49	41	35	30	26	20

GSZ130601A* / AR*F48601**

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	72.9	69.0	65.0	60.7	58.0	56.2	52.2	48.1	44.9	41.4	38.1	36.0	34.7	31.1	27.6	24.0	20.5	16.8
ΔT	37.5	35.5	33.4	31.2	29.8	28.9	26.9	24.8	23.1	21.3	19.6	18.5	17.8	16.0	14.2	12.4	10.6	8.6
kW	5.21	5.11	5.01	4.92	4.9	4.82	4.72	4.63	4.66	4.56	4.46	4.40	4.36	4.26	4.16	4.06	3.96	3.86
Amps	24.0	22.2	20.7	19.5	18.8	18.4	17.3	16.4	15.7	15.0	14.2	13.9	13.7	13.0	12.1	11.3	10.5	9.4
COP	4.10	3.95	3.79	3.62	3.49	3.41	3.23	3.05	2.82	2.66	2.50	2.40	2.33	2.14	1.94	1.73	1.52	1.28
EER	14.0	13.5	13.0	12.4	11.9	11.7	11.1	10.4	9.6	9.1	8.6	8.2	8.0	7.3	6.6	5.9	5.2	4.4
Hi PR	416	399	383	367	358	351	338	324	310	296	285	278	273	262	252	242	233	225
Lo PR	133	123	115	106	100	96	89	79	71	64	56	52	50	42	37	31	27	21

High pressure is measured at the suction service valve (the larger valve).
 Low pressure is measured at the gauge port connection.
 Calculations are based on nominal CFM and 70 °F indoor dry bulb.

Amps = Outdoor unit amps (comp.+fan)
 kW = Total system power

AHRI RATINGS

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				TVA RATINGS ³		HEATING CAPACITY			CFM	AHRI #	
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	HI	HSPF ⁴	LOW			
GSZ13 0181A*	ACNF24XX16D*		17,400	12,900	13.00	10.90	16,100	12,700	17,000	7.70	10,000	600	4689700	
	ARPT18B14A*		17,400	12,900	13.00	11.00	16,100	12,700	17,200	7.70	10,000	570	5429722	
	ARPT24B14A*		17,400	12,900	13.00	11.00	16,100	12,700	17,200	7.70	10,000	570	5429724	
	ARUF18B14A*		17,400	12,900	13.00	11.00	16,100	12,700	17,200	7.70	10,500	600	5358269	
	ARUF18B14A*+TXV		17,400	12,900	13.00	11.00	16,100	12,700	17,200	7.70	10,400	600	5439788	
	ARUF24B14C*		18,000	13,300	13.00	11.00	16,700	13,200	17,000	7.70	10,000	600	7084838	
	ARUF24B14C*+TXV		17,400	12,900	13.00	11.00	16,100	12,700	17,200	7.70	10,400	600	7084847	
	ASPT24B14A*		17,800	13,200	14.00	12.00	16,500	13,000	15,200	7.70	9,200	605	5722645	
	ASUF29B14A*		17,800	13,200	13.50	11.50	16,500	13,000	15,200	7.70	8,800	605	5722646	
	ASUF29B14A*+TXV		17,800	13,200	14.00	12.00	16,500	13,000	15,200	7.70	8,800	605	5722647	
	AVPTC24B14A*		17,800	13,200	14.00	12.00	16,500	13,000	15,200	7.70	9,200	600	5924422	
	AWUF18XX16B*		17,400	12,900	13.00	11.00	16,100	12,700	17,000	7.70	10,000	650	3570288	
	AWUF24XX16B*		17,400	12,900	13.00	11.00	16,100	12,700	17,000	8.00	10,000	600	3620216	
	AWUF31XX16A*		17,400	12,900	14.00	11.30	16,100	12,700	17,500	8.20	10,000	600	3629336	
	CA*F1824*6D*	G*E80603B*B*		17,400	12,900	14.00	11.30	16,100	12,700	17,000	8.00	10,000	650	5038609
	CA*F1824*6D*	G*VC950453BXB*		17,400	12,900	13.50	11.30	16,100	12,700	17,000	8.00	10,000	600	5937432
	CA*F1824*6D*	G*VC950704CXB*		17,400	12,900	13.50	11.00	16,100	12,700	17,000	8.00	10,000	600	5937433
	CA*F1824*6D*	G*VM960603BXB*		17,400	12,900	13.50	11.30	16,100	12,700	17,000	8.00	10,000	600	5937434
	CA*F1824*6D*	A*VC950453BXB*		17,400	12,900	13.50	11.00	16,100	12,700	17,000	8.00	10,000	600	6497859
	CA*F1824*6D*	A*VM960603BXB*		17,400	12,900	13.50	11.00	16,100	12,700	17,000	8.00	10,000	600	6497860
	CA*F1824*6D*	A*EH800603B*A*		17,400	12,900	14.00	11.30	16,100	12,700	17,000	8.00	10,000	650	6844554
	CA*F1824*6D*+EEP			17,400	12,900	13.00	11.50	16,100	12,700	17,000	7.80	10,000	600	4150306
	CA*F1824*6D*+MBVC1200**-1A*			17,400	12,900	14.00	11.30	16,100	12,700	17,000	8.00	10,000	600	4150307
	CAPT3131*4A*+EEP			17,400	12,900	13.00	11.00	16,100	12,700	16,600	7.70	10,200	650	5611351
	CAPT3131*4A*+MBVC1200**-1A*			17,400	12,900	14.00	11.50	16,100	12,700	16,000	7.70	9,700	600	5611338
	CHPF1824A6C*+EEP			17,400	12,900	13.00	11.50	16,100	12,700	17,000	7.80	10,000	600	3300295
	CHPF2430B6C*	G*E80603B*B*		17,400	12,900	14.00	11.30	16,100	12,700	17,000	8.00	10,000	650	5038610
CHPF2430B6C*	G*VC950453BXB*		17,400	12,900	13.50	11.30	16,100	12,700	17,000	8.00	10,000	600	5937435	
CHPF2430B6C*	G*VM960603BXB*		17,400	12,900	13.50	11.30	16,100	12,700	17,000	8.00	10,000	600	5937436	
CHPF2430B6C*	A*VC950453BXB*		17,400	12,900	13.50	11.30	16,100	12,700	17,000	8.00	10,000	600	6497861	
CHPF2430B6C*	A*VM960603BXB*		17,400	12,900	13.50	11.30	16,100	12,700	17,000	8.00	10,000	600	6497862	
CHPF2430B6C*	A*EH800603B*A*		17,400	12,900	14.00	11.30	16,100	12,700	17,000	8.00	10,000	650	6844556	
CHPF2430B6C*+MBVC1200**-1A*			17,800	13,200	14.00	11.30	16,500	13,000	17,000	8.00	10,000	600	3610001	
CSCF1824N6D*	G*VC950453BXB*		17,400	12,900	13.50	11.30	16,100	12,700	17,000	8.00	10,000	650	5937437	
CSCF1824N6D*	A*VC950453BXB*		17,400	12,900	13.50	11.30	16,100	12,700	17,000	8.00	10,000	650	6497863	
CSCF1824N6D*+EEP			17,400	12,900	13.00	11.00	16,100	12,700	17,000	7.80	10,000	600	4767595	
GSZ13 0241B*	ACNF24XX16D*		23,400	17,600	13.00	11.00	21,600	17,300	23,000	7.70	13,800	770	4689694	
	ACNF30XX16D*		23,600	17,800	13.00	11.00	21,800	17,500	23,000	7.70	13,800	770	4689695	
	ARUF24B14C*		23,000	17,300	13.00	11.00	21,200	17,000	21,600	7.70	13,500	800	7084854	
	ARUF24B14C*+TXV		23,000	17,300	13.00	11.00	21,200	17,000	21,600	7.70	13,500	800	7084839	
	ARUF30B14A*+TXV		23,000	17,300	13.00	11.00	21,200	17,000	21,600	7.70	13,600	775	5439791	
	ASPT24B14A*		22,800	17,200	13.50	11.50	21,200	16,900	21,600	7.70	11,300	810	5722754	
	ASPT30C14A*		23,000	17,300	14.00	11.50	21,200	17,000	21,800	8.00	11,300	810	5946198	
	ASUF29B14A*		22,800	17,200	13.30	11.30	21,200	16,900	21,600	7.70	10,800	810	5722755	
	ASUF29B14A*+TXV		22,800	17,200	13.50	11.50	21,200	16,900	21,600	7.70	10,800	810	5722756	
	AVPTC24B14A*		22,800	17,200	13.50	11.50	21,200	16,900	21,600	7.70	11,300	840	5924423	
	AWUF24XX16B*		22,800	17,200	13.00	11.00	21,200	16,900	23,000	7.70	13,800	800	3842470	
	AWUF30XX16B*		23,400	17,600	13.00	11.00	21,600	17,300	23,000	7.70	13,800	800	3842472	
	AWUF31XX16A*		24,000	18,100	14.00	12.00	22,200	17,800	22,800	8.20	13,400	800	3842473	
	AWUF32XX16A*		24,000	18,100	14.00	12.00	22,200	17,800	22,800	8.20	13,400	800	3842474	
	AWUF36XX16B*		24,000	18,100	13.00	11.00	22,200	17,800	23,200	8.00	13,800	800	3842475	
	CA*F1824*6D*	G*E80603B*B*		23,200	17,500	14.00	11.30	21,400	17,200	22,800	8.00	13,200	860	5038611
	CA*F1824*6D*	A*VC950453BXB*		23,000	17,300	13.50	11.30	21,200	17,000	23,000	8.00	13,400	820	6497864
CA*F1824*6D*	A*VM960603BXB*		23,000	17,300	13.50	11.30	21,200	17,000	23,000	8.00	13,400	820	6497865	

See Notes on Page 21.

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				TVA RATINGS ³		HEATING CAPACITY			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	HI	HSPF ⁴	LOW		
GSZ13 0241B* (cont.)	CA*F1824*6D*	A*EH800603B*A*	23,200	17,500	14.00	11.30	21,400	17,200	22,800	8.00	13,200	860	6844557
	CA*F1824*6D*+EEP		23,200	17,500	13.00	11.00	21,400	17,200	23,600	8.00	13,800	800	4150315
	CA*F1824*6D*+MBVC1200**-1A*		23,800	17,900	14.00	12.00	22,000	17,600	22,800	8.20	13,200	800	4150316
	CA*F1824*6D*+TXV	A*VC950704CXB*	23,000	17,300	14.00	11.30	21,200	17,000	23,000	8.00	13,400	820	6497866
	CHPF1824A6C*+EEP		23,200	17,500	13.00	11.00	21,400	17,200	23,400	7.80	13,800	800	3842485
	CHPF2430B6C*	G*E80603B*B*	23,200	17,500	14.00	11.30	21,400	17,200	23,000	8.00	13,400	860	5038637
	CHPF2430B6C*	A*VM960603BXB*	24,000	18,100	14.00	12.00	22,200	17,800	23,000	8.20	13,400	800	5937438
	CHPF2430B6C*	G*VC950453BXB*	24,000	18,100	14.00	12.00	22,200	17,800	23,000	8.20	13,400	800	5937439
	CHPF2430B6C*	G*VM960603BXB*	24,000	18,100	14.00	12.00	22,200	17,800	23,000	8.20	13,400	800	5937440
	CHPF2430B6C*	A*VC950453BXB*	23,000	17,300	13.50	11.30	21,200	17,000	23,000	8.00	13,400	820	6497867
	CHPF2430B6C*	A*EH800603B*A*	23,200	17,500	14.00	11.30	21,400	17,200	23,000	8.00	13,400	860	6844575
	CHPF2430B6C*+MBVC1200**-1A*		24,000	18,100	14.00	12.00	22,200	17,800	23,000	8.20	13,200	800	3842493
	CSCF1824N6D*	G*VC950453BXB*	23,800	17,900	14.00	12.00	22,000	17,600	23,000	8.20	13,400	800	5937441
	CSCF1824N6D*	A*VC950453BXB*	23,000	17,300	13.50	11.30	21,200	17,000	23,000	8.00	13,400	800	6497868
CSCF1824N6D*+EEP		23,200	17,500	13.00	11.00	21,400	17,200	23,600	8.00	13,400	825	4767600	
GSZ13 0301A*	ACNF30XX16D*		27,000	20,400	13.00	10.80	25,000	20,200	25,800	7.70	14,000	875	4689696
	ARPT36C14A*		28,400	21,400	13.00	10.90	26,200	21,400	27,000	8.00	16,600	980	5429593
	ARUF30C14B*		27,400	20,600	13.00	11.00	25,400	20,600	27,000	7.80	16,400	1,000	5936460
	ARUF30C14B*+TXV		28,000	21,200	13.00	11.00	26,000	21,000	27,000	8.00	16,400	1,000	5936016
	ARUF36C14B*		27,400	20,600	13.00	11.00	25,400	20,600	27,000	7.80	16,400	950	5649399
	ARUF36C14B*+TXV		28,000	21,200	13.00	11.00	26,000	21,000	27,000	8.00	16,400	950	5647194
	ASPT36C14A*		28,600	21,600	14.00	12.00	26,400	21,400	26,200	8.00	16,000	1,010	5722652
	ASUF39C14A*		28,600	21,600	13.50	11.50	26,400	21,400	26,200	8.00	16,000	1,010	5722651
	ASUF39C14A*+TXV		28,600	21,600	14.00	12.00	26,400	21,400	26,200	8.00	16,000	1,010	5722690
	AVPTC36C14A*		28,600	21,600	14.00	12.00	26,400	21,400	26,200	8.00	16,000	1,015	5924406
	AWUF30XX16B*		27,400	20,600	13.00	11.00	25,400	20,600	25,600	8.00	14,400	1,025	3287828
	AWUF36XX16B*		28,000	21,200	13.00	11.00	26,000	21,000	25,600	8.00	14,400	1,025	3287829
	AWUF37XX16B*		28,000	21,200	13.00	11.00	26,000	21,000	25,800	8.00	14,000	1,050	3287830
	CA*F3131*6D*	G*E80603B*B*	28,400	21,400	13.50	11.30	26,200	21,400	26,400	8.20	16,000	1,050	5038645
	CA*F3131*6D*	A*VC950714CXB*	28,400	21,400	13.50	11.30	26,200	21,400	26,400	8.00	16,000	1,050	5937442
	CA*F3131*6D*	A*VM960604CXB*	28,400	21,400	13.50	11.30	26,200	21,400	26,400	8.00	16,000	1,050	5937443
	CA*F3131*6D*	G*VC950453BXB*	28,400	21,400	13.50	11.30	26,200	21,400	26,400	8.00	16,000	1,000	5937444
	CA*F3131*6D*	G*VC950704CXB*	28,400	21,400	13.50	11.30	26,200	21,400	26,400	8.00	16,000	900	5937445
	CA*F3131*6D*	G*VC950714CXB*	28,400	21,400	13.50	11.30	26,200	21,400	26,400	8.00	16,000	1,050	5937446
	CA*F3131*6D*	G*VM960603BXB*	28,400	21,400	13.50	11.30	26,200	21,400	26,400	8.00	16,000	1,000	5937447
	CA*F3131*6D*	G*VM960604CXB*	28,400	21,400	13.50	11.30	26,200	21,400	26,400	8.00	16,000	1,050	5937448
	CA*F3131*6D*	A*VC950453BXB*	28,400	21,400	13.50	11.30	26,200	21,400	26,400	8.00	16,000	1,000	6497869
	CA*F3131*6D*	A*VC950704CXB*	28,400	21,400	13.50	11.30	26,200	21,400	26,400	8.00	16,000	900	6497870
	CA*F3131*6D*	A*VM960603BXB*	28,400	21,400	13.50	11.30	26,200	21,400	26,400	8.00	16,000	1,000	6497871
	CA*F3131*6D*	A*EH800603B*A*	28,400	21,400	13.50	11.30	26,200	21,400	26,400	8.20	16,000	1,050	6844586
	CA*F3131*6D*+EEP		28,400	21,400	13.00	11.00	26,200	21,400	26,400	8.00	16,000	1,000	4385572
	CA*F3636*6D*+EEP		28,600	21,600	13.00	11.00	26,400	21,400	26,400	7.80	16,000	1,050	4392830
	CHPF2430B6C*	G*E80603B*B*	28,400	21,400	13.50	11.30	26,200	21,400	26,400	8.20	16,000	1,050	5038612
	CHPF2430B6C*	G*VC950453BXB*	28,400	21,400	13.50	11.30	26,200	21,400	26,400	8.00	16,000	1,050	5937449
	CHPF2430B6C*	G*VM960603BXB*	28,400	21,400	13.50	11.30	26,200	21,400	26,400	8.00	16,000	1,050	5937450
	CHPF2430B6C*	A*VC950453BXB*	28,400	21,400	13.50	11.30	26,200	21,400	26,400	8.00	16,000	1,050	6497872
	CHPF2430B6C*	A*VM960603BXB*	28,400	21,400	13.50	11.30	26,200	21,400	26,400	8.00	16,000	1,050	6497873
	CHPF2430B6C*	A*EH800603B*A*	28,400	21,400	13.50	11.30	26,200	21,400	26,400	8.20	16,000	1,050	6844559
	CHPF2430B6C*+EEP		28,400	21,400	13.00	11.00	26,200	21,400	26,400	8.00	16,000	1,050	3300309
CHPF2430B6C*+MBVC1200**-1A*		28,400	21,400	14.00	11.30	26,200	21,400	26,400	8.20	16,000	1,050	3610003	
CSCF3036N6D*	G*VC950453BXB*	28,400	21,400	13.50	11.30	26,200	21,400	26,400	8.00	16,000	1,000	5937451	
CSCF3036N6D*	A*VC950453BXB*	28,400	21,400	13.50	11.30	26,200	21,400	26,400	8.00	16,000	1,000	6497874	
CSCF3036N6D*+EEP		28,400	21,400	13.00	11.00	26,200	21,400	26,400	8.00	16,000	1,000	4767604	

See Notes on Page 26.

AHRI RATINGS

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				TVA RATINGS ³		HEATING CAPACITY			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	HI	HSPF ⁴	LOW		
GSZ13 0361B*	ARPT36C14A*		33,000	25,000	13.00	11.00	30,600	24,400	33,000	8.00	20,800	1,020	5429727
	ARPT36D14A*		35,000	26,600	13.50	11.50	32,400	26,000	32,200	8.00	20,600	1,020	5429728
	ARPT42D14A*		33,600	25,600	13.50	11.50	31,200	24,800	32,200	8.00	20,800	1,175	5429729
	ARUF36C14B*		33,000	25,000	13.00	11.00	30,600	24,400	33,000	8.00	20,800	1,000	5647196
	ARUF36C14B*+TXV		33,000	25,000	13.00	11.00	30,600	24,400	33,000	8.00	20,800	1,000	5647197
	ARUF42C14A*		33,600	25,600	13.00	11.00	31,200	24,800	34,000	8.00	20,800	1,000	5598661
	ARUF42C14A*+TXV		33,600	25,600	13.00	11.00	31,200	24,800	34,000	8.00	20,800	1,000	5429746
	ASPT36C14A*		34,000	25,800	14.00	11.50	31,400	25,200	33,000	8.00	19,900	1,210	5722655
	ASPT42C14A*		34,400	26,200	14.00	11.50	31,800	25,400	34,000	8.00	19,900	1,230	7040835
	ASPT42D14A*		35,200	26,800	14.00	12.00	32,600	26,000	33,000	8.20	21,200	1,280	6497875
	ASUF39C14A*		34,000	25,800	13.00	11.00	31,400	25,200	33,000	8.00	21,800	1,210	5722656
	ASUF39C14A*+TXV		34,000	25,800	13.50	11.50	31,400	25,200	33,000	8.00	21,800	1,210	5722657
	AVPTC36C14A*		34,000	25,800	14.00	11.50	31,400	25,200	33,000	8.00	19,900	1,100	5924424
	AVPTC48C14A*		34,400	26,200	14.00	11.50	31,800	25,400	34,000	8.00	19,900	1,200	7040836
	AWUF37XX16B*		34,000	25,800	13.00	11.00	31,400	25,200	34,000	8.00	21,000	1,150	3850485
	CA*F3636*6D*	G*VC91155DXA*	35,000	26,600	14.00	11.50	32,400	26,000	32,800	8.20	20,200	1,050	4392834
	CA*F3636*6D*	G*E81005C*B*	35,200	26,800	13.50	11.30	32,600	26,000	32,000	8.20	20,000	1,230	5038640
	CA*F3636*6D*	G*E80805C*B*	33,800	25,600	13.50	11.30	31,200	25,000	32,400	8.20	20,000	1,060	5038684
	CA*F3636*6D*	A*VC950915DXB*	35,200	26,800	13.50	11.30	32,600	26,000	33,000	8.00	21,000	1,050	5937452
	CA*F3636*6D*	G*VC950905CXB*	35,200	26,800	13.50	11.20	32,600	26,000	33,000	8.00	21,000	1,050	5937453
	CA*F3636*6D*	G*VC950905DXB*	35,200	26,800	13.50	11.30	32,600	26,000	33,000	8.00	21,000	1,050	5937454
	CA*F3636*6D*	G*VC950915DXB*	35,200	26,800	13.50	11.30	32,600	26,000	33,000	8.00	21,000	1,050	5937455
	CA*F3636*6D*	G*VC951155DXB*	35,000	26,600	13.50	11.30	32,400	26,000	32,800	8.00	20,200	1,050	5937456
	CA*F3636*6D*	G*VM960805CXB*	35,200	26,800	13.50	11.20	32,600	26,000	33,000	8.00	21,000	1,050	5937457
	CA*F3636*6D*	G*VM960805DXB*	35,200	26,800	13.50	11.30	32,600	26,000	33,000	8.00	21,000	1,050	5937458
	CA*F3636*6D*	G*VM961005DXB*	35,000	26,600	13.50	11.30	32,400	26,000	32,800	8.00	20,200	1,050	5937459
	CA*F3636*6D*	G*VM961155DXB*	35,000	26,600	13.50	11.30	32,400	26,000	32,800	8.00	20,200	1,050	5937460
	CA*F3636*6D*	A*EH801005C*A*	35,200	26,800	13.50	11.30	32,600	26,000	32,000	8.20	20,000	1,230	6844580
	CA*F3636*6D*	A*EH800805C*A*	33,800	25,600	13.50	11.30	31,200	25,000	32,400	8.20	20,000	1,060	6844622
	CA*F3636*6D*+EEP		34,600	26,200	13.00	11.00	32,000	25,600	33,400	7.80	21,000	1,050	4392839
	CA*F3642*6D*	G*VC91155DXA*	35,200	26,800	14.00	11.50	32,600	26,000	32,600	8.20	20,200	1,050	3880659
	CA*F3642*6D*	G*E80805C*B*	33,800	25,600	13.50	11.30	31,200	25,000	32,000	8.20	20,000	1,060	5038641
	CA*F3642*6D*	G*E81005C*B*	35,200	26,800	13.50	11.30	32,600	26,000	32,000	8.20	20,000	1,230	5038642
	CA*F3642*6D*	A*VC950915DXB*	35,200	26,800	13.50	11.30	32,600	26,000	32,200	8.00	20,200	1,050	5937461
	CA*F3642*6D*	G*VC950905CXB*	35,200	26,800	13.50	11.20	32,600	26,000	32,200	8.00	20,200	1,050	5937462
	CA*F3642*6D*	G*VC950905DXB*	35,200	26,800	13.50	11.30	32,600	26,000	32,200	8.00	20,200	1,050	5937463
	CA*F3642*6D*	G*VC950915DXB*	35,200	26,800	13.50	11.30	32,600	26,000	32,200	8.00	20,200	1,050	5937464
	CA*F3642*6D*	G*VC951155DXB*	35,200	26,800	13.50	11.30	32,600	26,000	32,600	8.00	20,200	1,050	5937465
	CA*F3642*6D*	G*VM960805CXB*	35,200	26,800	13.50	11.20	32,600	26,000	32,200	8.00	20,200	1,050	5937466
	CA*F3642*6D*	G*VM960805DXB*	35,200	26,800	13.50	11.30	32,600	26,000	32,200	8.00	20,200	1,050	5937467
	CA*F3642*6D*	G*VM961005DXB*	35,200	26,800	13.50	11.30	32,600	26,000	32,600	8.00	20,200	1,050	5937468
	CA*F3642*6D*	G*VM961155DXB*	35,200	26,800	13.50	11.30	32,600	26,000	32,600	8.00	20,200	1,050	5937469
	CA*F3642*6D*	A*EH800805C*A*	33,800	25,600	13.50	11.30	31,200	25,000	32,000	8.20	20,000	1,060	6844582
	CA*F3642*6D*	A*EH801005C*A*	35,200	26,800	13.50	11.30	32,600	26,000	32,000	8.20	20,000	1,230	6844583
	CA*F3642*6D*+EEP		34,600	26,200	13.00	11.00	32,000	25,600	33,200	8.00	21,000	1,050	3880683
	CA*F3642*6D*+MBVC1600**-1A*		35,200	26,800	14.00	11.50	32,600	26,000	32,000	8.20	20,000	1,200	3880695
	CA*F3743*6D*	A*VC81005C*B*	35,000	26,600	13.50	11.30	32,400	26,000	34,000	8.20	20,000	1,210	6497876
	CA*F3743*6D*	A*VC950905CXB*	35,000	26,600	13.50	11.30	32,400	26,000	34,000	8.00	20,000	1,200	6497877
CA*F3743*6D*	A*VC950905DXB*	35,000	26,600	13.50	11.30	32,400	26,000	34,000	8.00	20,000	1,200	6497878	
CA*F3743*6D*	A*VC950915DXB*	35,000	26,600	13.50	11.30	32,400	26,000	34,000	8.00	20,000	1,200	6497879	
CA*F3743*6D*	A*VC951155DXB*	35,000	26,600	13.50	11.30	32,400	26,000	34,000	8.00	20,000	1,200	6497880	
CA*F3743*6D*	A*VM960805CXB*	35,000	26,600	13.50	11.30	32,400	26,000	34,000	8.00	20,000	1,200	6497881	
CA*F3743*6D*	A*VM960805DXB*	35,000	26,600	13.50	11.30	32,400	26,000	34,000	8.00	20,000	1,200	6497882	
CA*F3743*6D*	A*VM961005DXB*	35,000	26,600	13.50	11.30	32,400	26,000	34,000	8.00	20,000	1,200	6497883	

See Notes on Page 26.

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				TVA RATINGS ³		HEATING CAPACITY			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	HI	HSPF ⁴	LOW		
GSZ13 0361B* (cont.)	CA*F3743*6D*	A*VM961155DXB*	35,000	26,600	13.50	11.30	32,400	26,000	34,000	8.00	20,000	1,200	6497884
	CA*F3743*6D*	ADVC81005C*B*	35,000	26,600	13.50	11.30	32,400	26,000	34,000	8.20	20,000	1,230	6497885
	CA*F3743*6D*	G*VC81005C*B*	35,000	26,600	13.50	11.30	32,400	26,000	34,000	8.20	20,000	1,210	6497886
	CA*F3743*6D*	G*VC950915DXB*	35,000	26,600	13.50	11.30	32,400	26,000	34,000	8.00	20,000	1,200	6497887
	CA*F3743*6D*+MBVC1600**-1A*		35,000	26,600	14.00	11.30	32,400	26,000	34,000	8.20	20,000	1,200	6497888
	CAPT3743*4A*+EEP		34,200	26,000	13.00	11.00	31,600	25,400	34,000	8.00	21,000	1,100	5611339
	CAPT3743*4A*+MBVC1600**-1A*		34,600	26,200	14.00	11.50	32,000	25,600	33,800	8.00	20,000	1,200	5611340
	CAPT3743*4A*+MBVC2000**-1A*		34,600	26,200	14.00	11.50	32,000	25,600	33,600	8.00	20,000	1,200	5611341
	CHPF3636B6C*+EEP		34,400	26,200	13.00	11.00	31,800	25,400	33,800	8.00	20,000	1,050	3850497
	CHPF3642C6C*	G*E80805C*B*	33,800	25,600	13.50	11.30	31,200	25,000	32,600	8.20	20,000	1,060	5038638
	CHPF3642C6C*	G*E81005C*B*	35,000	26,600	13.50	11.30	32,400	26,000	32,800	8.20	20,000	1,230	5038714
	CHPF3642C6C*	A*VC81005C*B*	35,000	26,600	13.50	11.30	32,400	26,000	34,000	8.20	20,000	1,210	6497889
	CHPF3642C6C*	G*VC81005C*B*	35,000	26,600	13.50	11.30	32,400	26,000	34,000	8.20	20,000	1,210	6497890
	CHPF3642C6C*	A*EH800805C*A*	33,800	25,600	13.50	11.30	31,200	25,000	32,600	8.20	20,000	1,060	6844577
	CHPF3642C6C*	A*EH801005C*A*	35,000	26,600	13.50	11.30	32,400	26,000	32,800	8.20	20,000	1,230	6844651
	CHPF3642C6C*+EEP		34,400	26,200	13.00	11.00	31,800	25,400	33,800	8.00	20,000	1,050	3850499
	CHPF3642C6C*+MBVC1600**-1A*		34,800	26,400	14.00	11.50	32,200	25,800	32,600	8.20	20,000	1,200	3850501
	CHPF3642D6C*	G*VC911155DXA*	35,000	26,600	14.00	11.50	32,400	26,000	32,800	8.20	20,200	1,050	3850505
	CHPF3642D6C*	G*E81005C*B*	35,200	26,800	13.50	11.30	32,600	26,000	32,000	8.20	20,000	1,230	5038646
	CHPF3642D6C*	G*VC950905CXB*	35,000	26,600	13.50	11.20	32,400	26,000	32,600	8.00	20,000	1,050	5937470
	CHPF3642D6C*	G*VC950905DXB*	35,000	26,600	13.50	11.30	32,400	26,000	32,600	8.00	20,000	1,050	5937471
	CHPF3642D6C*	G*VC951155DXB*	35,000	26,600	13.50	11.30	32,400	26,000	32,800	8.00	20,200	1,050	5937472
	CHPF3642D6C*	G*VM960805CXB*	35,000	26,600	13.50	11.20	32,400	26,000	32,600	8.00	20,000	1,050	5937473
	CHPF3642D6C*	G*VM960805DXB*	35,000	26,600	13.50	11.30	32,400	26,000	32,600	8.00	20,000	1,050	5937474
	CHPF3642D6C*	G*VM961005DXB*	35,000	26,600	13.50	11.30	32,400	26,000	32,800	8.00	20,200	1,050	5937475
	CHPF3642D6C*	G*VM961155DXB*	35,000	26,600	13.50	11.30	32,400	26,000	32,800	8.00	20,200	1,050	5937476
	CHPF3642D6C*	A*VC950905CXB*	35,000	26,600	14.00	11.30	32,400	26,000	34,000	8.20	20,000	1,200	6497891
	CHPF3642D6C*	A*VC950905DXB*	35,000	26,600	14.00	11.30	32,400	26,000	34,000	8.20	20,000	1,200	6497892
	CHPF3642D6C*	A*VC951155DXB*	35,000	26,600	14.00	11.30	32,400	26,000	34,000	8.20	20,000	1,200	6497893
	CHPF3642D6C*	A*VM960805CXB*	35,000	26,600	14.00	11.30	32,400	26,000	34,000	8.20	20,000	1,200	6497894
	CHPF3642D6C*	A*VM960805DXB*	35,000	26,600	13.50	11.30	32,400	26,000	34,000	8.00	20,000	1,200	6497895
	CHPF3642D6C*	A*VM961005DXB*	35,000	26,600	14.00	11.30	32,400	26,000	34,000	8.20	20,000	1,200	6497896
	CHPF3642D6C*	A*VM961155DXB*	35,000	26,600	14.00	11.30	32,400	26,000	34,000	8.20	20,000	1,200	6497897
	CHPF3642D6C*	A*EH801005C*A*	35,200	26,800	13.50	11.30	32,600	26,000	32,000	8.20	20,000	1,230	6844588
	CHPF3642D6C*+EEP		34,400	26,200	13.00	11.00	31,800	25,400	33,800	8.00	20,000	1,050	3850508
	CHPF3642D6C*+MBVC2000**-1A*		35,200	26,800	14.00	12.00	32,600	26,000	32,000	8.50	20,000	1,150	3850543
	CSCF3642N6D*	A*VC950905CXB*	35,000	26,600	14.00	11.30	32,400	26,000	34,000	8.00	20,000	1,150	6497898
	CSCF3642N6D*	A*VC950905DXB*	35,000	26,600	14.00	11.30	32,400	26,000	34,000	8.00	20,000	1,150	6497899
	CSCF3642N6D*	A*VC951155DXB*	35,000	26,600	14.00	11.30	32,400	26,000	34,000	8.00	20,000	1,225	6497900
	CSCF3642N6D*+EEP		35,000	26,600	13.00	11.00	32,400	26,000	34,000	7.80	20,000	1,200	6497901
DV48PTCC14A*		34,400	26,200	14.00	11.50	31,800	25,400	34,000	8.00	19,900	1,200	7040837	
GSZ13 0421A*	ARPT42D14A*		39,500	28,000	13.00	11.00	36,600	28,800	39,000	8.00	23,600	1,300	5438676
	ARUF42C14A*		39,000	27,600	13.00	11.00	36,200	28,600	38,000	8.00	23,800	1,250	5358274
	ARUF48D14A*		40,000	28,400	13.00	11.00	37,000	29,200	39,000	8.00	24,200	1,300	5438677
	ASPT42D14A*		39,500	28,000	14.00	11.50	36,600	28,800	37,600	8.00	20,400	1,385	5722760
	ASPT48C14A*		38,500	27,200	13.50	11.50	35,600	28,200	38,000	8.00	20,000	1,380	7040838
	ASUF49C14A*		38,500	27,200	13.50	11.00	35,600	28,200	37,600	8.00	20,800	1,280	5620387
	ASUF49C14A*+TXV		38,500	27,200	13.80	11.00	35,600	28,200	37,600	8.00	20,800	1,280	5620388
	AVPTC42D14A*		39,500	28,000	14.00	11.50	36,600	28,800	37,600	8.00	20,400	1,255	5924425
	AVPTC48C14A*		38,500	27,200	13.50	11.50	35,600	28,200	38,000	8.00	20,000	1,400	7040839

See Notes on Page 26.

AHRI RATINGS

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				TVA RATINGS ³		HEATING CAPACITY			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	HI	HSPF ⁴	LOW		
GSZ13 0421A* (cont.)	CA*F3642*6D*+EEP		40,000	28,400	13.00	11.00	37,000	29,200	40,000	8.00	24,000	1,350	3880679
	CA*F3743*6D*+EEP		40,000	28,400	13.00	11.00	37,000	29,200	40,000	8.00	24,000	1,350	4415218
	CA*F4860*6D*	G*VC91155DXA*	41,000	29,000	13.50	11.30	38,000	30,000	40,500	8.00	24,000	1,350	3880727
	CA*F4860*6D*	G*VC951155DXB*	41,000	29,000	13.50	11.30	38,000	30,000	40,500	8.00	24,000	1,350	5937477
	CA*F4860*6D*	G*VM961005DXB*	41,000	29,000	13.50	11.30	38,000	30,000	40,500	8.00	24,000	1,350	5937478
	CA*F4860*6D*	G*VM961155DXB*	41,000	29,000	13.50	11.30	38,000	30,000	40,500	8.00	24,000	1,350	5937479
	CA*F4860*6D*	A*VC80805C*B*	41,000	29,000	13.50	11.30	38,000	30,000	40,500	8.20	24,000	1,400	6497902
	CA*F4860*6D*	A*VC950905CXB*	41,000	29,000	13.50	11.20	38,000	30,000	40,500	8.00	24,000	1,350	6497903
	CA*F4860*6D*	A*VC950905DXB*	41,000	29,000	13.50	11.30	38,000	30,000	40,500	8.00	24,000	1,350	6497904
	CA*F4860*6D*	A*VC950915DXB*	41,000	29,000	13.50	11.30	38,000	30,000	40,500	8.00	24,000	1,350	6497905
	CA*F4860*6D*	A*VC951155DXB*	41,000	29,000	13.50	11.30	38,000	30,000	40,500	8.00	24,000	1,350	6497906
	CA*F4860*6D*	A*VM960805CXB*	41,000	29,000	13.50	11.20	38,000	30,000	40,500	8.00	24,000	1,350	6497907
	CA*F4860*6D*	A*VM960805DXB*	41,000	29,000	13.50	11.30	38,000	30,000	40,500	8.00	24,000	1,350	6497908
	CA*F4860*6D*	A*VM961005DXB*	41,000	29,000	13.50	11.30	38,000	30,000	40,500	8.00	24,000	1,350	6497909
	CA*F4860*6D*	A*VM961155DXB*	41,000	29,000	13.50	11.30	38,000	30,000	40,500	8.00	24,000	1,350	6497910
	CA*F4860*6D*	ADVC80805C*B*	41,000	29,000	13.50	11.30	38,000	30,000	40,500	8.20	24,000	1,380	6497911
	CA*F4860*6D*	G*VC80805C*B*	41,000	29,000	13.50	11.30	38,000	30,000	40,500	8.20	24,000	1,400	6497912
	CA*F4860*6D*	G*VC950915DXB*	41,000	29,000	13.50	11.30	38,000	30,000	40,500	8.00	24,000	1,350	6497913
	CA*F4860*6D*+TXV	G*E80805C*B*	41,000	29,000	14.00	11.30	38,000	30,000	40,500	8.20	24,000	1,350	5038613
	CA*F4860*6D*+TXV	G*E81005C*B*	41,000	29,000	14.00	11.30	38,000	30,000	40,500	8.20	24,000	1,420	5038685
	CA*F4860*6D*+TXV	A*EH800805C*A*	41,000	29,000	14.00	11.30	38,000	30,000	40,500	8.20	24,000	1,350	6844561
	CA*F4860*6D*+TXV	A*EH801005C*A*	41,000	29,000	14.00	11.30	38,000	30,000	40,500	8.20	24,000	1,420	6844623
	CHPF3642C6C*+EEP		40,500	28,800	13.00	11.00	37,600	29,600	40,000	8.00	24,000	1,350	3300323
	CHPF3642D6C*+EEP		40,500	28,800	13.00	11.00	37,600	29,600	40,000	8.00	24,000	1,350	3300324
	CHPF4860D6D*	G*VC91155DXA*	41,000	29,000	13.50	11.30	38,000	30,000	40,500	8.00	24,000	1,350	3599130
	CHPF4860D6D*	G*VC950905CXB*	41,000	29,000	13.50	11.20	38,000	30,000	40,500	8.00	24,000	1,350	5937480
	CHPF4860D6D*	G*VC950905DXB*	41,000	29,000	13.50	11.30	38,000	30,000	40,500	8.00	24,000	1,350	5937481
	CHPF4860D6D*	G*VC951155DXB*	41,000	29,000	13.50	11.30	38,000	30,000	40,500	8.00	24,000	1,350	5937482
	CHPF4860D6D*	G*VM960805CXB*	41,000	29,000	13.50	11.20	38,000	30,000	40,500	8.00	24,000	1,350	5937483
	CHPF4860D6D*	G*VM960805DXB*	41,000	29,000	13.50	11.30	38,000	30,000	40,500	8.00	24,000	1,350	5937484
	CHPF4860D6D*	G*VM961005DXB*	41,000	29,000	13.50	11.30	38,000	30,000	40,500	8.00	24,000	1,350	5937485
	CHPF4860D6D*	G*VM961155DXB*	41,000	29,000	13.50	11.30	38,000	30,000	40,500	8.00	24,000	1,350	5937486
	CHPF4860D6D*	A*VC80805C*B*	41,000	29,000	13.50	11.30	38,000	30,000	40,500	8.20	24,000	1,400	6497914
	CHPF4860D6D*	A*VC950905CXB*	41,000	29,000	13.50	11.20	38,000	30,000	40,500	8.00	24,000	1,350	6497915
	CHPF4860D6D*	A*VC950905DXB*	41,000	29,000	13.50	11.30	38,000	30,000	40,500	8.00	24,000	1,350	6497916
	CHPF4860D6D*	A*VC951155DXB*	41,000	29,000	13.50	11.30	38,000	30,000	40,500	8.00	24,000	1,350	6497917
	CHPF4860D6D*	A*VM960805CXB*	41,000	29,000	13.50	11.20	38,000	30,000	40,500	8.00	24,000	1,350	6497918
	CHPF4860D6D*	A*VM960805DXB*	41,000	29,000	13.50	11.30	38,000	30,000	40,500	8.00	24,000	1,350	6497919
	CHPF4860D6D*	A*VM961005DXB*	41,000	29,000	13.50	11.30	38,000	30,000	40,500	8.00	24,000	1,350	6497920
	CHPF4860D6D*	A*VM961155DXB*	41,000	29,000	13.50	11.30	38,000	30,000	40,500	8.00	24,000	1,350	6497921
	CHPF4860D6D*	G*VC80805C*B*	41,000	29,000	13.50	11.30	38,000	30,000	40,500	8.20	24,000	1,400	6497922
	CHPF4860D6D*+MBVC1600**_1A*		41,000	29,000	14.00	11.30	38,000	30,000	40,500	8.20	24,000	1,350	3610032
	CHPF4860D6D*+TXV	G*E80805C*B*	41,000	29,000	14.00	11.30	38,000	30,000	40,500	8.20	24,000	1,350	5038639
	CHPF4860D6D*+TXV	G*E81005C*B*	41,000	29,000	14.00	11.30	38,000	30,000	40,500	8.20	24,000	1,420	5038686
	CHPF4860D6D*+TXV	A*EH800805C*A*	41,000	29,000	14.00	11.30	38,000	30,000	40,500	8.20	24,000	1,350	6844578
	CHPF4860D6D*+TXV	A*EH801005C*A*	41,000	29,000	14.00	11.30	38,000	30,000	40,500	8.20	24,000	1,420	6844625
	CSCF3642N6D*+EEP		40,000	28,400	13.00	11.00	37,000	29,200	40,000	8.00	24,000	1,275	4767613
	CSCF4860N6D*	G*VC950905CXB*	41,000	29,000	13.50	11.20	38,000	30,000	40,500	8.00	24,000	1,450	5937487
	CSCF4860N6D*	G*VC950905DXB*	41,000	29,000	13.50	11.30	38,000	30,000	40,500	8.00	24,000	1,450	5937488
	CSCF4860N6D*	G*VC951155DXB*	41,000	29,000	13.50	11.30	38,000	30,000	40,500	8.00	24,000	1,425	5937489
CSCF4860N6D*	A*VC950905CXB*	41,000	29,000	13.50	11.20	38,000	30,000	40,500	8.00	24,000	1,450	6497923	
CSCF4860N6D*	A*VC950905DXB*	41,000	29,000	13.50	11.30	38,000	30,000	40,500	8.00	24,000	1,450	6497924	
DV48PTCC14A*		38,500	27,200	13.50	11.50	35,600	28,200	38,000	8.00	20,000	1,400	7040840	

See Notes on Page 26.

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				TVA RATINGS ³		HEATING CAPACITY			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	HI	HSPF ⁴	LOW		
GSZ13 0481A*	ARPT48D14A*		46,000	36,000	13.00	11.00	42,500	34,600	45,000	8.20	27,200	1,500	5429732
	ARPT60D14A*		46,000	36,000	13.50	11.50	42,500	34,600	44,500	8.20	27,000	1,495	5429733
	ARUF48D14A*		45,000	35,200	13.00	11.00	41,500	33,800	44,000	8.00	27,000	1,450	5358275
	ARUF60D14A*		45,000	35,200	13.00	11.00	41,500	33,800	44,000	8.00	27,600	1,515	5429730
	ASPT48C14A*		43,500	34,200	13.30	11.30	40,500	32,600	43,000	8.00	26,000	1,475	7040841
	ASPT48D14A*		46,000	36,000	14.00	12.00	42,500	34,600	44,000	8.20	26,400	1,600	5796518
	ASPT60D14A*		46,000	36,000	14.00	12.00	42,500	34,600	44,000	8.20	26,400	1,600	5722661
	ASUF49C14A*		42,000	33,000	13.00	11.00	39,000	31,600	44,000	8.00	26,000	1,570	5620389
	ASUF49C14A*+TXV		42,000	33,000	13.30	11.00	39,000	31,600	44,000	8.00	26,200	1,570	5620390
	AVPTC48C14A*		43,500	34,200	13.30	11.30	40,500	32,600	43,000	8.00	26,000	1,445	7040842
	AVPTC48D14A*		46,000	36,000	14.00	12.00	42,500	34,600	44,000	8.20	26,400	1,615	5924426
	CA*F4860*6D*+EEP		46,000	36,000	13.00	11.00	42,500	34,600	44,000	8.20	27,000	1,600	3880738
	CA*F4860*6D*+MBVC2000**-1A*+TXV		46,000	36,000	14.00	11.30	42,500	34,600	44,000	8.20	27,000	1,600	3880758
	CA*F4860*6D*+TXV	G*E80805C*B*	45,500	35,600	13.50	11.30	42,000	34,200	44,000	8.20	27,000	1,650	5038669
	CA*F4860*6D*+TXV	G*E81005C*B*	45,000	35,200	13.50	11.30	41,500	33,800	44,000	8.20	27,000	1,570	5038715
	CA*F4860*6D*+TXV	A*VC950915DXB*	45,500	35,600	14.00	11.30	42,000	34,200	44,000	8.20	27,000	1,600	5937490
	CA*F4860*6D*+TXV	G*VC950905CXB*	46,000	36,000	13.50	11.30	42,500	34,600	44,000	8.20	27,000	1,600	5937491
	CA*F4860*6D*+TXV	G*VC950905DXB*	46,000	36,000	13.50	11.30	42,500	34,600	44,000	8.20	27,000	1,600	5937492
	CA*F4860*6D*+TXV	G*VC950915DXB*	45,500	35,600	14.00	11.30	42,000	34,200	44,000	8.20	27,000	1,600	5937493
	CA*F4860*6D*+TXV	G*VC951155DXB*	46,000	36,000	13.50	11.30	42,500	34,600	44,000	8.20	27,000	1,600	5937494
	CA*F4860*6D*+TXV	G*VM960805CXB*	46,000	36,000	13.50	11.30	42,500	34,600	44,000	8.20	27,000	1,600	5937495
	CA*F4860*6D*+TXV	G*VM960805DXB*	45,500	35,600	13.50	11.30	42,000	34,200	44,000	8.20	27,000	1,600	5937496
	CA*F4860*6D*+TXV	G*VM961005DXB*	46,000	36,000	13.50	11.30	42,500	34,600	44,000	8.20	27,000	1,600	5937497
	CA*F4860*6D*+TXV	G*VM961155DXB*	46,000	36,000	13.50	11.30	42,500	34,600	44,000	8.20	27,000	1,600	5937498
	CA*F4860*6D*+TXV	A*VC80805C*B*	45,000	35,200	13.50	11.30	41,500	33,800	44,000	8.20	27,000	1,590	6497925
	CA*F4860*6D*+TXV	A*VC950905CXB*	46,000	36,000	14.00	11.30	42,500	34,600	44,000	8.20	27,000	1,600	6497926
	CA*F4860*6D*+TXV	A*VC950905DXB*	46,000	36,000	14.00	11.30	42,500	34,600	44,000	8.20	27,000	1,600	6497927
	CA*F4860*6D*+TXV	A*VC951155DXB*	46,000	36,000	14.00	11.30	42,500	34,600	44,000	8.20	27,000	1,600	6497928
	CA*F4860*6D*+TXV	A*VM960805CXB*	46,000	36,000	14.00	11.30	42,500	34,600	44,000	8.20	27,000	1,600	6497929
	CA*F4860*6D*+TXV	A*VM960805DXB*	45,500	35,600	14.00	11.30	42,000	34,200	44,000	8.20	27,000	1,600	6497930
	CA*F4860*6D*+TXV	A*VM961005DXB*	46,000	36,000	14.00	11.30	42,500	34,600	44,000	8.20	27,000	1,600	6497931
	CA*F4860*6D*+TXV	A*VM961155DXB*	46,000	36,000	14.00	11.30	42,500	34,600	44,000	8.20	27,000	1,600	6497932
	CA*F4860*6D*+TXV	ADVC80805C*B*	45,000	35,200	13.50	11.30	41,500	33,800	44,000	8.20	27,000	1,580	6497933
	CA*F4860*6D*+TXV	G*VC80805C*B*	45,000	35,200	13.50	11.30	41,500	33,800	44,000	8.20	27,000	1,590	6497934
	CA*F4860*6D*+TXV	A*EH800805C*A*	45,500	35,600	13.50	11.30	42,000	34,200	44,000	8.20	27,000	1,650	6844611
	CA*F4860*6D*+TXV	A*EH801005C*A*	45,000	35,200	13.50	11.30	41,500	33,800	44,000	8.20	27,000	1,570	6844652
	CAPT4961*4A*+EEP		45,000	35,200	13.00	11.00	41,500	33,800	43,000	8.00	27,200	1,500	5611342
	CAPT4961*4A*+MBVC2000**-1A*		45,500	35,600	14.00	12.00	42,000	34,200	41,500	8.50	26,200	1,550	5611343
	CHPF4860D6D*+EEP		46,000	36,000	13.00	11.30	42,500	34,600	44,000	8.20	27,000	1,600	3300334
	CHPF4860D6D*+MBVC2000**-1A*+TXV		46,000	36,000	14.00	11.30	42,500	34,600	44,000	8.20	27,000	1,600	3610053
	CHPF4860D6D*+TXV	G*VC91155DXA*	46,000	36,000	14.00	11.30	42,500	34,600	44,000	8.20	27,000	1,600	3599136
	CHPF4860D6D*+TXV	G*E81005C*B*	45,000	35,200	13.50	11.30	41,500	33,800	44,000	8.20	27,000	1,570	5038614
	CHPF4860D6D*+TXV	G*E80805C*B*	45,500	35,600	13.50	11.30	42,000	34,200	44,000	8.20	27,000	1,650	5038716
	CHPF4860D6D*+TXV	G*VC950905CXB*	46,000	36,000	13.50	11.30	42,500	34,600	44,000	8.20	27,000	1,600	5937499
	CHPF4860D6D*+TXV	G*VC950905DXB*	46,000	36,000	13.50	11.30	42,500	34,600	44,000	8.20	27,000	1,600	5937500
	CHPF4860D6D*+TXV	G*VC951155DXB*	46,000	36,000	13.50	11.30	42,500	34,600	44,000	8.20	27,000	1,600	5937501
	CHPF4860D6D*+TXV	G*VM960805CXB*	46,000	36,000	13.50	11.30	42,500	34,600	44,000	8.20	27,000	1,600	5937502
	CHPF4860D6D*+TXV	G*VM960805DXB*	45,500	35,600	13.50	11.30	42,000	34,200	44,000	8.20	27,000	1,600	5937503
CHPF4860D6D*+TXV	G*VM961005DXB*	46,000	36,000	13.50	11.30	42,500	34,600	44,000	8.20	27,000	1,600	5937504	
CHPF4860D6D*+TXV	G*VM961155DXB*	46,000	36,000	13.50	11.30	42,500	34,600	44,000	8.20	27,000	1,600	5937505	
CHPF4860D6D*+TXV	A*VC80805C*B*	45,000	35,200	13.50	11.30	41,500	33,800	44,000	8.20	27,000	1,590	6497935	
CHPF4860D6D*+TXV	A*VC950905CXB*	46,000	36,000	14.00	11.30	42,500	34,600	44,000	8.20	27,000	1,600	6497936	
CHPF4860D6D*+TXV	A*VC950905DXB*	46,000	36,000	14.00	11.30	42,500	34,600	44,000	8.20	27,000	1,600	6497937	
CHPF4860D6D*+TXV	A*VC951155DXB*	46,000	36,000	14.00	11.30	42,500	34,600	44,000	8.20	27,000	1,600	6497938	
CHPF4860D6D*+TXV	A*VM960805CXB*	46,000	36,000	14.00	11.30	42,500	34,600	44,000	8.20	27,000	1,600	6497939	

See Notes on Page 26.

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				TVA RATINGS ³		HEATING CAPACITY			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	HI	HSPF ⁴	LOW		
GSZ13 0481A* (cont.)	CHPF4860D6D*+TXV	A*VM960805DXB*	45,500	35,600	14.00	11.30	42,000	34,200	44,000	8.20	27,000	1,600	6497940
	CHPF4860D6D*+TXV	A*VM961005DXB*	46,000	36,000	14.00	11.30	42,500	34,600	44,000	8.20	27,000	1,600	6497941
	CHPF4860D6D*+TXV	A*VM961155DXB*	46,000	36,000	14.00	11.30	42,500	34,600	44,000	8.20	27,000	1,600	6497942
	CHPF4860D6D*+TXV	G*VC80805C*B*	45,000	35,200	13.50	11.30	41,500	33,800	44,000	8.20	27,000	1,590	6497943
	CHPF4860D6D*+TXV	A*EH801005C*A*	45,000	35,200	13.50	11.30	41,500	33,800	44,000	8.20	27,000	1,570	6844562
	CHPF4860D6D*+TXV	A*EH800805C*A*	45,500	35,600	13.50	11.30	42,000	34,200	44,000	8.20	27,000	1,650	6844654
	CSCF4860N6D*+EEP		46,000	36,000	13.00	11.30	42,500	34,600	44,000	8.20	27,000	1,600	4767619
	CSCF4860N6D*+TXV	G*VC950905CXB*	46,000	36,000	14.00	11.30	42,500	34,600	44,000	8.20	27,000	1,575	5937506
	CSCF4860N6D*+TXV	G*VC950905DXB*	46,000	36,000	14.00	11.30	42,500	34,600	44,000	8.20	27,000	1,575	5937507
	CSCF4860N6D*+TXV	A*VC950905CXB*	46,000	36,000	14.00	11.30	42,500	34,600	44,000	8.20	27,000	1,575	6497944
	CSCF4860N6D*+TXV	A*VC950905DXB*	46,000	36,000	14.00	11.30	42,500	34,600	44,000	8.20	27,000	1,575	6497945
	CSCF4860N6D*+TXV	A*VC951155DXB*	46,000	36,000	14.00	11.30	42,500	34,600	44,000	8.20	27,000	1,550	6497946
	DV48PTCC14A*		43,500	34,200	13.30	11.30	40,500	32,600	43,000	8.00	26,000	1,445	7040843
GSZ13 0601A*	ARPT60D14A*		56,000	42,500	13.00	11.00	52,000	41,500	59,000	8.00	37,400	1,850	5429748
	ARUF60D14A*+TXV		55,500	42,500	13.00	10.80	51,500	41,000	59,000	8.20	37,800	1,800	5439795
	ASPT60D14A*		57,000	43,500	13.50	11.50	52,500	42,000	59,500	8.20	37,000	1,600	5722663
	ASUF59D14A*		57,000	43,500	13.50	11.50	52,500	42,000	59,500	8.20	35,000	1,580	5600184
	AVPTC60D14A*		57,000	43,500	13.50	11.50	52,500	42,000	59,500	8.20	37,000	1,805	5924407
	CA*F4860*6D*+EEP		57,000	43,500	13.00	11.10	52,500	42,000	58,000	8.20	36,000	1,800	3880737
	CA*F4860*6D*+MBVC2000**-1A*+TXV		57,000	43,500	13.50	11.30	52,500	42,000	58,000	8.50	36,000	1,800	3880759
	CA*F4860*6D*+TXV	G*E81005C*B*	57,000	43,500	13.50	11.20	52,500	42,000	58,000	8.20	36,000	1,570	5038615
	CA*F4860*6D*+TXV	G*E80805C*B*	56,500	43,000	13.50	11.20	52,500	42,000	58,000	8.20	36,000	1,650	5038687
	CA*F4860*6D*+TXV	A*VC80805C*B*	57,000	43,500	13.50	11.20	52,500	42,000	58,000	8.20	36,000	1,810	6497947
	CA*F4860*6D*+TXV	A*VC81005C*B*	57,000	43,500	13.50	11.20	52,500	42,000	58,000	8.20	36,000	1,790	6497948
	CA*F4860*6D*+TXV	ADVC80805C*B*	57,000	43,500	13.50	11.20	52,500	42,000	58,000	8.20	36,000	1,800	6497949
	CA*F4860*6D*+TXV	ADVC81005C*B*	57,000	43,500	13.50	11.20	52,500	42,000	58,000	8.20	36,000	1,820	6497950
	CA*F4860*6D*+TXV	G*VC80805C*B*	57,000	43,500	13.50	11.20	52,500	42,000	58,000	8.20	36,000	1,810	6497951
	CA*F4860*6D*+TXV	G*VC81005C*B*	57,000	43,500	13.50	11.20	52,500	42,000	58,000	8.20	36,000	1,790	6497952
	CA*F4860*6D*+TXV	A*EH801005C*A*	57,000	43,500	13.50	11.20	52,500	42,000	58,000	8.20	36,000	1,570	6844564
	CA*F4860*6D*+TXV	A*EH800805C*A*	56,500	43,000	13.50	11.20	52,500	42,000	58,000	8.20	36,000	1,650	6844627
	CA*F4961*6D*+EEP		57,500	44,000	13.00	11.00	53,000	42,500	58,000	8.20	36,000	1,800	4431853
	CHPF4860D6D*+EEP		55,500	42,500	13.00	11.10	51,500	41,000	58,000	8.20	36,000	1,800	3300344
	CHPF4860D6D*+MBVC2000**-1A*+TXV		57,000	43,500	13.50	11.30	52,500	42,000	58,000	8.50	36,000	1,800	3610054
	CHPF4860D6D*+TXV	G*E80805C*B*	56,000	42,500	13.50	11.20	52,000	41,500	58,000	8.20	36,000	1,600	5038654
	CHPF4860D6D*+TXV	G*E81005C*B*	57,000	43,500	13.50	11.20	52,500	42,000	58,000	8.20	36,000	1,810	5038717
	CHPF4860D6D*+TXV	A*VC80805C*B*	57,000	43,500	13.50	11.20	52,500	42,000	58,000	8.20	36,000	1,810	6497953
	CHPF4860D6D*+TXV	A*VC81005C*B*	57,000	43,500	13.50	11.20	52,500	42,000	58,000	8.20	36,000	1,790	6497954
	CHPF4860D6D*+TXV	G*VC80805C*B*	57,000	43,500	13.50	11.20	52,500	42,000	58,000	8.20	36,000	1,810	6497955
	CHPF4860D6D*+TXV	G*VC81005C*B*	57,000	43,500	13.50	11.20	52,500	42,000	58,000	8.20	36,000	1,790	6497956
	CHPF4860D6D*+TXV	A*EH800805C*A*	56,000	42,500	13.50	11.20	52,000	41,500	58,000	8.20	36,000	1,600	6844599
	CHPF4860D6D*+TXV	A*EH801005C*A*	57,000	43,500	13.50	11.20	52,500	42,000	58,000	8.20	36,000	1,810	6844655
	CSCF4860N6D*+EEP		57,000	43,500	13.00	11.00	52,500	42,000	58,000	8.20	36,000	1,800	4767626
	CSCF4860N6D*+TXV	G*VC950905CXB*	57,000	43,500	13.30	11.00	52,500	42,000	58,000	8.20	36,000	1,675	5937508
	CSCF4860N6D*+TXV	G*VC950905DXB*	57,000	43,500	13.30	11.00	52,500	42,000	58,000	8.20	36,000	1,675	5937509
	CSCF4860N6D*+TXV	A*VC950905CXB*	57,000	43,500	13.30	11.00	52,500	42,000	58,000	8.20	36,000	1,675	6497957
	CSCF4860N6D*+TXV	A*VC950905DXB*	57,000	43,500	13.30	11.00	52,500	42,000	58,000	8.20	36,000	1,675	6497958
CSCF4860N6D*+TXV	A*VC951155DXB*	57,000	43,500	13.30	11.00	52,500	42,000	58,000	8.20	36,000	1,850	6497959	

¹ Seasonal Energy Efficiency Ratio; Certified per ARI 210/240 @ 80°F/ 67°F/ 95°F

² Energy Efficiency Ratio @ 80°F/ 67°F/ 95°F


³ TVA Rating: BTU/h @ 75°F/ 63°F - 95°F

⁴ HSPF = Heating Seasonal Performance Factor

NOTES

- Always check the S&R plate for electrical data on the unit being installed.
- When matching outdoor unit to indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- EEP - Order from Service Dept. Part # B13707-38 or new Solid State Board B13707-35S. Part # B13707-38 is not interchangeable with B13707-35S. The Goodman Gas Furnace contains the EEP cooling time delay.

WIRING DIAGRAM

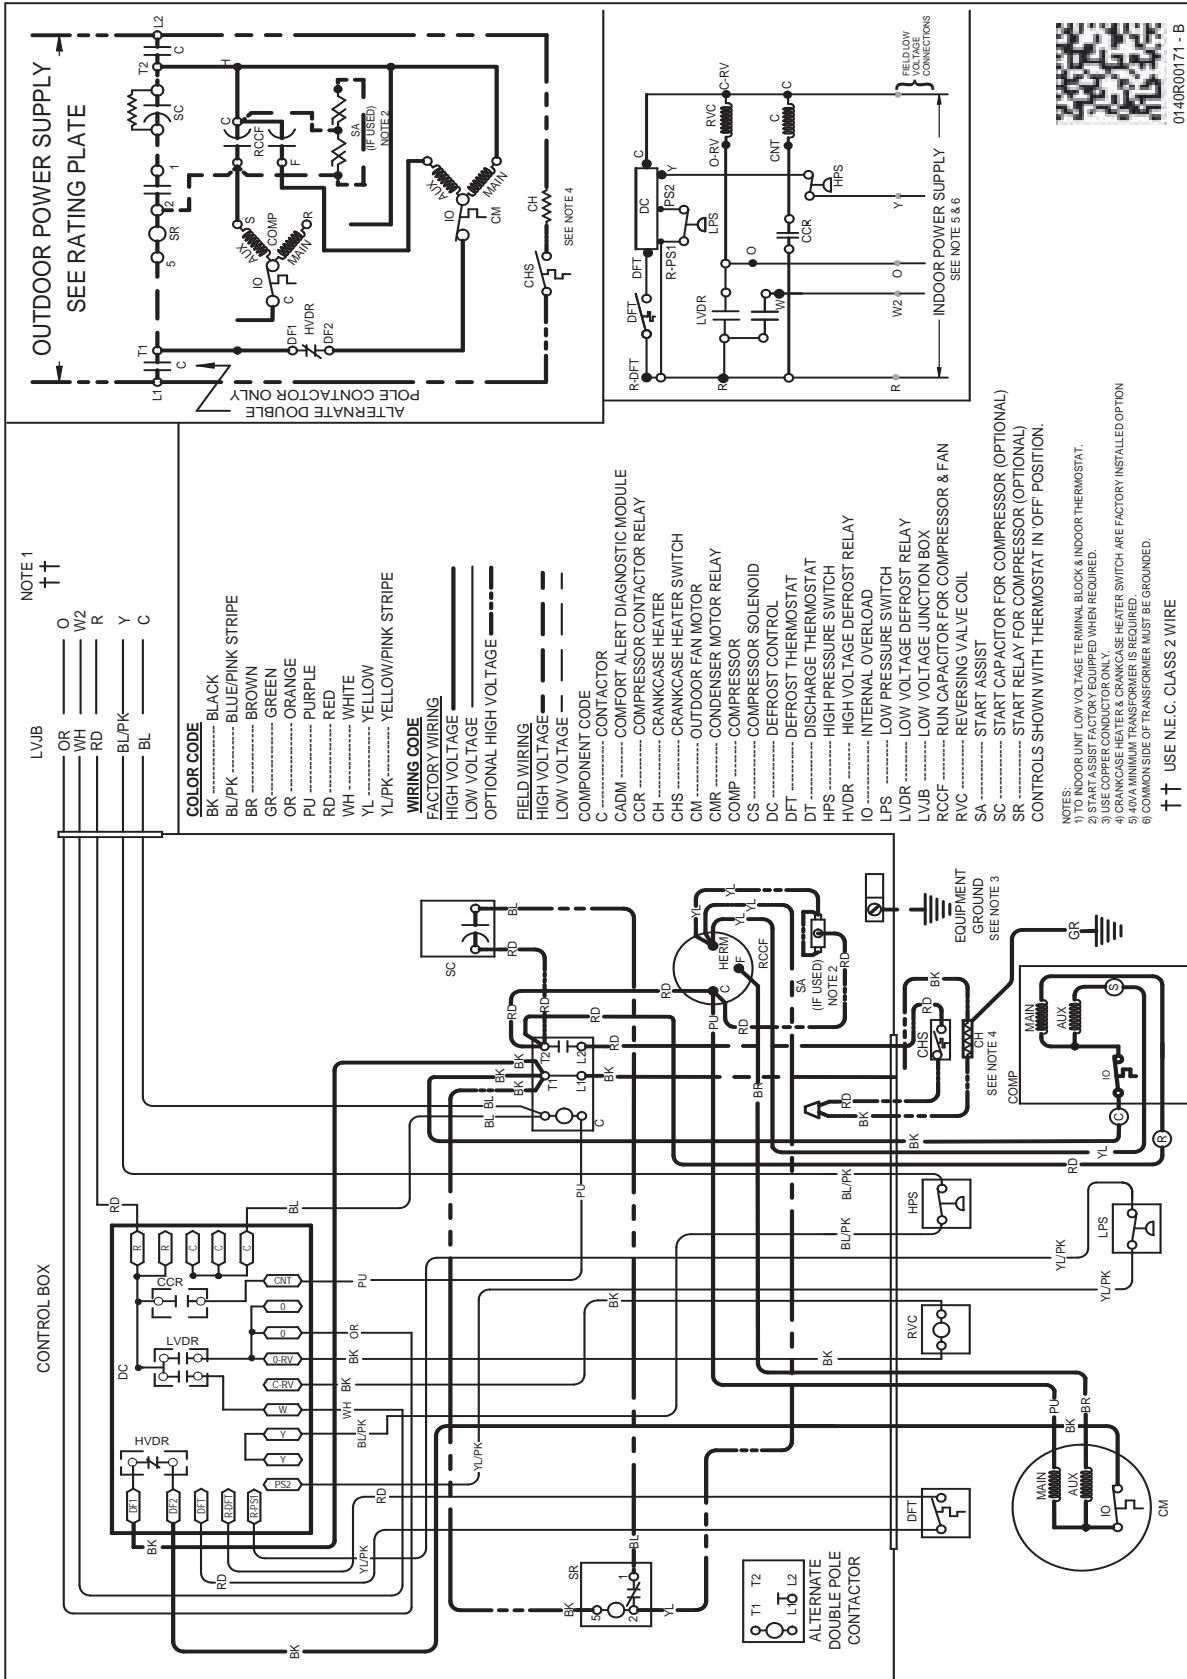


0140R00171 - B

WARNING

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

Wiring is subject to change. Always refer to the wiring diagram or the unit for the most up-to-date wiring.

DIMENSIONS

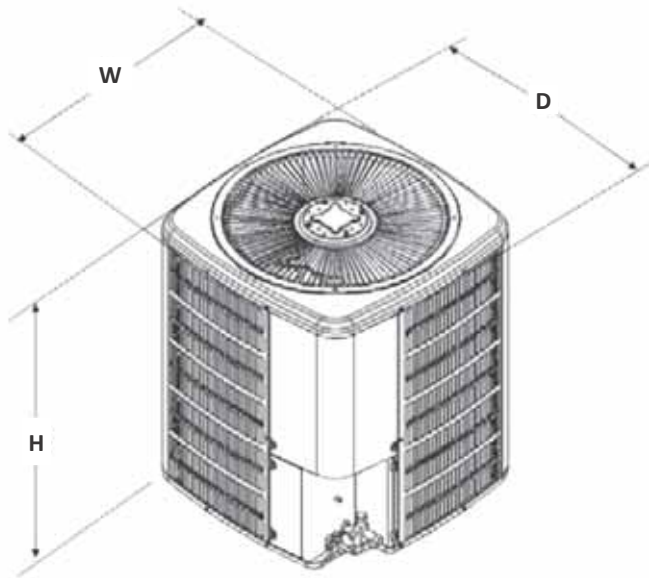

MODEL	DIMENSIONS		
	W"	D"	H"
GSZ130181**	26	26	32¼
GSZ130241**	26	26	32¼
GSZ130301**	26	26	32¼
GSZ130361**	29	29	32¼
GSZ130421**	29	29	38¼
GSZ130481**	29	29	34¼
GSZ130601**	35½	35½	34¼

ACCESSORIES

MODEL #	DESCRIPTION	GSZ13 018	GSZ13 024	GSZ13 030	GSZ13 036	GSZ13 042	GSZ13 048	GSZ13 060
0130R00000S	Low-pressure Switch Kit	X	X	X	X	X	X	X
ABK-20	Anchor Bracket Kit [◊]	X	X	X	X	X	X	X
ASC-01	Anti-Short Cycle Kit	X	X	X	X	X	X	X
AFE18-60A	All-fuel Kit	X	X	X	X	X	X	X
CSR-U-1	Hard-start Kit	X	X	X	X	X	X	X
FSK01A ¹	Freeze Protection Kit	X	X	X	X	X	X	X
OT18-60A ²	Outdoor Thermostat	X	X	X	X	X	X	X
OT/EHR18-60	Emergency Heat Relay kit	X	X	X	X	X	X	X
TX2N4 ³	TXV Kit	X						
TX2N4A ³	TXV Kit	X	X					
TX3N4 ³	TXV Kit			X	X			
TX5N4 ³	TXV Kit					X	X	X

[◊] Contains 20 brackets; four brackets needed to anchor unit to pad

¹ Installed on indoor coil

² Required for heat pump applications where ambient temperatures fall below 0°F with 50% or higher relative humidity.

³ Condensing units and heat pumps with reciprocating compressors require the use of start-assist components when used in conjunction with an indoor coil using a non-bleed thermal expansion valve refrigerant metering device or liquid line solenoid kit. The TXV should always be sized based on the tonnage of the outdoor unit.