


## HOLDRITE® Overhead Pipe Supports

The Holdrite® Concrete Insert Brackets are installed on wood forms in conjunction with cast-in-place concrete slabs. When the wood forms are stripped away, the Holdrite® Hangover Bracket is ready to support up to 1" CTS for horizontal pipe runs.

### The HOLDRITE® HANGOVER CONCRETE INSERT BRACKETS

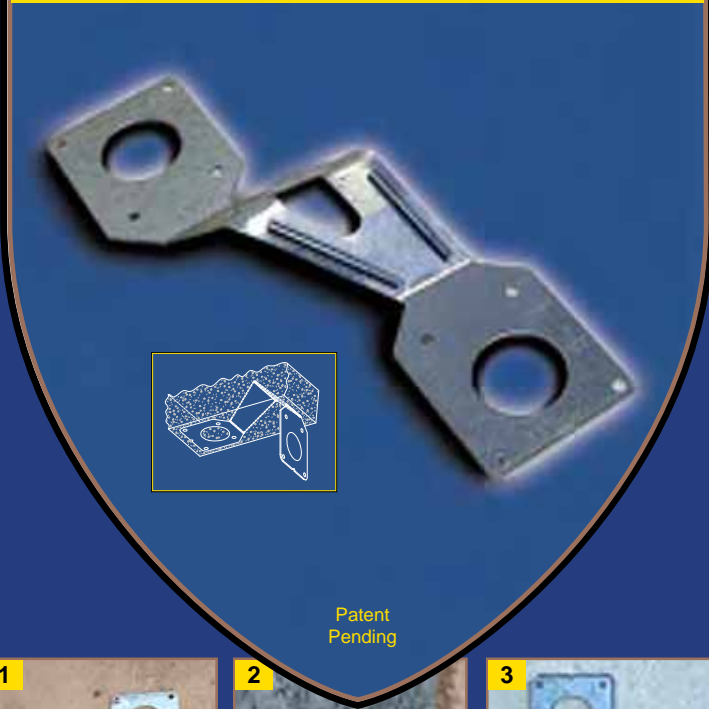

- No Overhead Drilling
- Increase Installation Speed
- Be the First Trade In and the First Trade Out!
- Compatible with Copper, PEX, and CPVC
- Complies with MSS SP-58 (150 pounds)
- Best When Used with Holdrite Inserts
- No Cutting of Hanger Rods Required
- Ideal for 1/2", 3/4" and 1" Pipe Sizes

Model#	Pipe Size	Overhead Load Rating
121 Series	1/2", 3/4", 1"	25 lbs.
125 Series	1/2", 3/4", 1"	150 lbs. in 3000 PSI Concrete



### The HOLDRITE® 121 SERIES BRACKETS OVERHEAD RUN SOLUTIONS



- Anchor Directly to Ceiling
- Reduces the Need for Overhead Drilling
- Supports Multiple Pipe Runs
- Attach to All Thread
- Reduce Installed Costs
- Eliminate the need to Cut Hanger Rod
- Supports 1/2", 3/4" and 1" Tubing
- Compatible with Holdrite Inserts

# HOLDRITE® Overhead Pipe Supports

## CONCRETE INSERTS



Model#	Description	Box Qty
125	Galvanized steel bracket for cast-in-place concrete slabs. One end provides 1-1/4" centerline, opposite end has 2" centerline. For 1/2", 3/4", and 1" tubing.	50
125-D	Galvanized steel bracket for cast-in-place concrete slabs. Both ends provide 2" centerlines. Provides side-by-side parallel pipe runs. For 1/2", 3/4", and 1" tubing.	50
125-L	Galvanized steel bracket for cast-in-place concrete slabs. One end provides 1-1/4" centerline, opposite end has 2" and 4" centerlines. For 1/2", 3/4", and 1" tubing.	50

## UNINTERRUPTED INSULATION RUNS



Model#	Description	Box Qty
121-DL	Galvanized dual run steel bracket with 2-1/8" holes allows for uninterrupted insulation and shield to pass through. Provides a 3" centerline.	25
121-RL	Galvanized single steel bracket with 2-1/8" hole allows for uninterrupted insulation and shield to pass through. Provides a 3" centerline.	50
121-S8	2" x 8" Insulation Shield (supports up to 2-1/8" O.D. insulation).	50

## MULTIPLE RUNS



Model#	Description	Box Qty
121-D	Galvanized steel bracket supports multiple runs. Provides 2" centerlines.	25
121-L	Galvanized steel bracket supports multiple runs. Provides 2" and 4" centerlines.	25
121-O	Galvanized steel bracket supports multiple runs. Provides 1-1/4", 2-3/8", 3-1/2" centerlines.	25

## HIGH and TIGHT RUNS



Model#	Description	Box Qty
121-R	Galvanized steel bracket supports single run. Provides 1-1/4" centerline.	25
121-DS	Galvanized steel bracket supports dual runs. Provides 1-1/4" centerline.	25

## LOW and GO RUNS / VERTICAL RUNS



Model#	Description	Box Qty
121-DLS	Galvanized steel bracket supports dual runs. Provides 3" centerline.	25
121-RLS	Galvanized steel bracket for low hanging runs. Provides 3" centerline.	50
121-W	Galvanized steel bracket for single pipe run. Provides 2" centerline.	25
121	Galvanized steel bracket for vertical pipe on pipe support. Holdrite 100 series inserts are recommended.	25

## INSERTS



Model#	Description	Bag Qty
404-R, 405-R, 406-R	1/2", 3/4", 1" Fire Retardant inserts. Meets UL 94V-2.	100
404-S, 405-S, 406-S	1/2", 3/4", 1" Smoke / Fire Rated inserts meet ASTM E-84 25/50.	100
414, 415, 416	1/2", 3/4", 1" "Wing Ear" inserts allow for adjusting to off center holes.	50/50/25