

Features

- ExoCrylic™
- Oval shape
- Drop-in installation
- Six individually adjustable ProFlex® hydro-massage jets
- Pump with air switch and grounding-type plug-in cord
- Molded lumbar support and armrests for comfort
- Optional K-9696 whirlpool trim kit in additional finishes



Codes/Standards

ASME A112.19.7/CSA B45.10
CSA B45.5/IAPMO Z124
UL 1795
CSA 22.2 No. 218.2

KOHLER® One-Year Limited Warranty


See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond

No change in measurements if connected with drain illustrated. (K-11677)

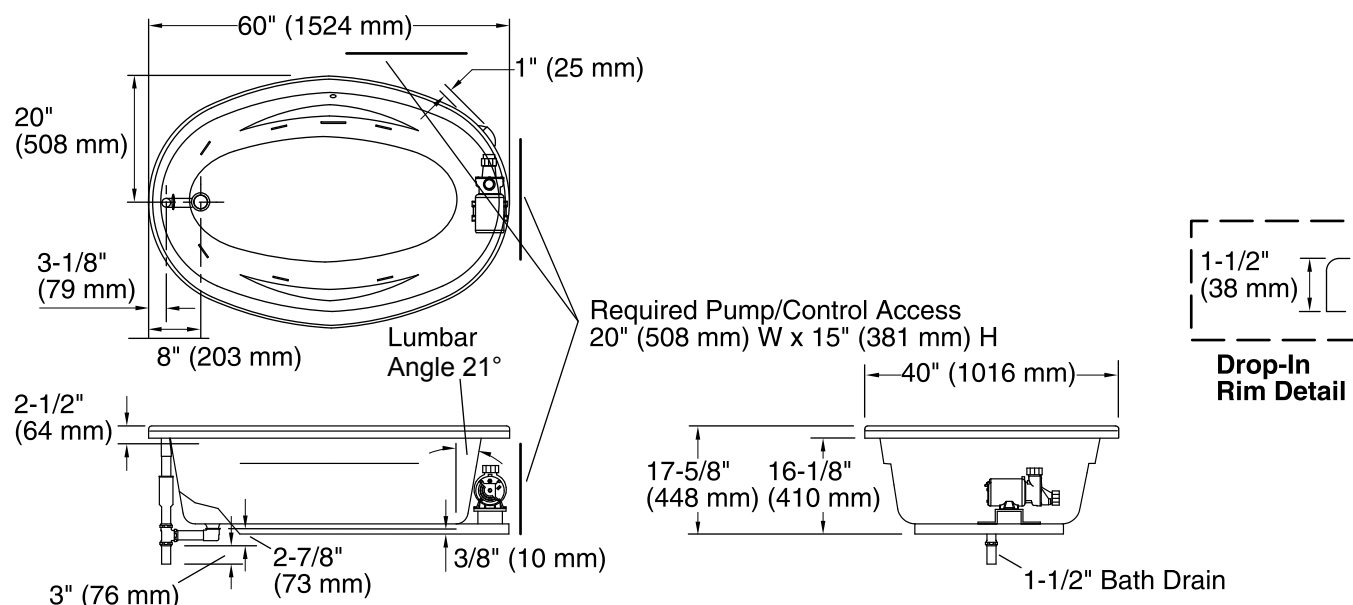

Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Pump: 120 V, 15 A, 60 Hz

Technical Information

All product dimensions are nominal.

Installation: Drop-in
Drain location: Reversible
Basin area, bottom: 46" x 19" (1168 mm x 483 mm)
Basin area, top: 55" x 29" (1397 mm x 737 mm)
Weight: 56 lbs (25.4 kg)
Minimum floor load: 30 lbs/ft² (146.5 kg/m²)
Water depth: 14" (356 mm)
Water capacity: 54 gal (204.4 L)
Template: Drop-in, 114859-7, required, not included
Electrical rating: Pump: 120 V, 7.5 A, 60 Hz

Notes

Measure your actual product for roughing-in details.

Install this product according to the installation guide.

The suction line extends 1" (25 mm) beyond the edge of the rim. The pump base extends 1-1/8" (29 mm) beyond the edge of the rim. Modify the framing as needed.