

Features

- Brass construction.
- Brass valve bodies.
- Quarter-turn washerless ceramic disc valves.
- Less drain and lift rod.
- Standard aerator.
- Wristblade lever handles.
- 5" (127 mm) spout reach.
- 2.0 gal/min (7.6 l/min) maximum flow rate [max at 60 psi (4.14 bar)].



For complete listing of available colors, go to kohler.com.

ADA

Codes/Standards

ASME A112.18.1/CSA B125.1

NSF 61

NSF 372

ADA

ICC/ANSI A117.1

DOE - Energy Policy Act 1992


All applicable US Federal and State material regulations

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Product Specification

Bathroom sink base faucet shall be 5" (127 mm) spout reach and 1-3/4" (44 mm) spout outlet height. Bathroom sink base faucet shall be brass construction with brass valve bodies. Bathroom sink base faucet shall be wristblade lever handles. Bathroom sink base faucet shall be less drain. Bathroom sink base faucet shall be for 8" (203 mm) or 16" (406 mm) centers. Bathroom sink base faucet shall be KOHLER Model K-7443-5A.

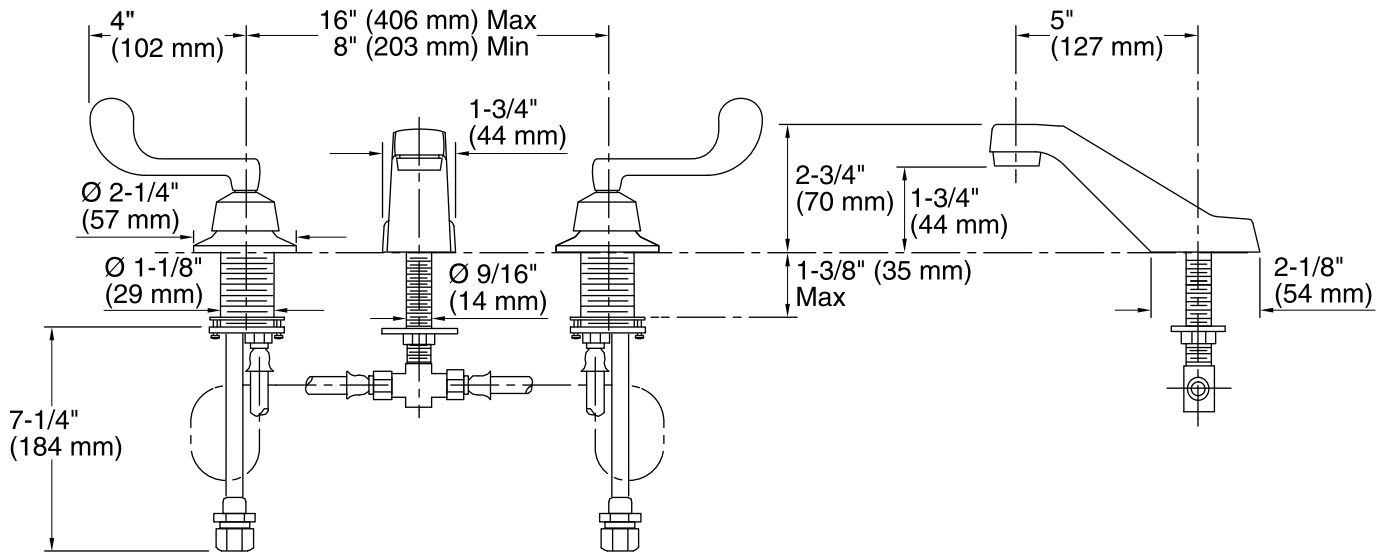

All measurements are nominal.

Faucet:
Flow rate: 2 gal/min (7.6 l/min)
Pressure: 60 psi (4.1 bar)

Install this product according to the installation guide.

ADA compliant when installed to the specific requirements of these regulations.