

Liberty Pumps®

EPAK-LSG

Unassembled Grinder System with Alarm

**24" x 48"
Fiberglass Basin
with Anti-float Collar**

**2 hp. Omnivore
Grinder Pump
(Automatic Model LSG202A)**

1-1/4" Discharge

Features:

- Solid fiberglass cover
- Pre-cut internal piping (1-1/4" schedule 80 PVC)
- Heavy duty check valve
 - Ball Valve
- 2" electrical conduit hub (unmounted)
- 4" inlet seal (unmounted)
- ALM-2W (indoor/outdoor) alarm



ALM-2W Alarm

3
Year Warranty

Omnivore
Grinders

innovate. evolve.

EPAK-LSG

UNASSEMBLED GRINDER SYSTEM WITH ALARM



Model LSG202A Grinder Pump

- 2 hp., 208-230V, 1 Phase, 60 Hz, 15 Amps, 3450 RPM
- Discharge 1 1/4"
- Cable length 25'

(See LSG200-Series literature for complete pump specifications.)

Alarm ALM-2W


- Indoor/Outdoor type 3R
- 115 volt
- Red beacon
- 82 db horn
- Test/Silence Switch
- Auxiliary Contacts

Internal Piping Kit (#K001171) Includes:


- 1-1/4" Check Valve
- 1-1/4" Ball Valve
- Elbow 90°
- G90 Cast Iron Pump Elbow

Dimensional Data:

Complete System Weight: 194 lbs.

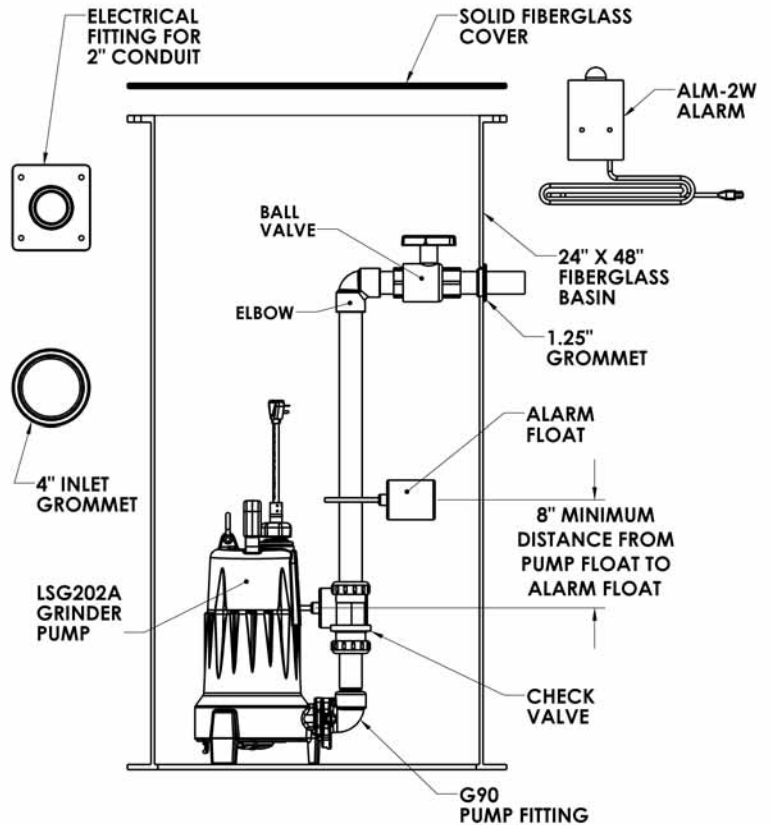

Performance Curve: LSG202

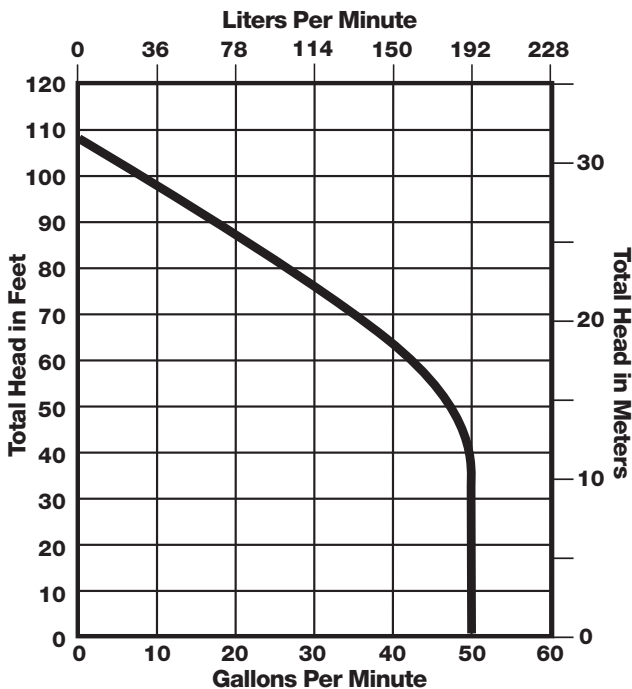

EPAK-LSG System is unassembled. All internal piping components shown in above diagram included with system.

Total Capacity: 94 Gallons
Capacity Per Pump Cycle: 12 Gallons



Specifications are subject to change without notice.