Pfirst Series™

Kitchen Faucet

G136-2000 Finish*(CC)* ❑
G136-200S Finish*(SS)* ❑
G136-5000 Finish*(CC)* ❑
G136-500S Finish*(SS)* ❑



- Two-Handle
- 3 or 4-Hole Installation
- Pforever Seal

Specifications

Features

- 1.8 GPM Flow Rate
- Lever Handle
- 3-Hole Installation (200* Only)
- 4-Hole Installation (500* Only)
- High Arc Spout
- Includes Matching Side Spray (500* Only)
- Chrome Side Spray (5000 Only)
- Stainless Steel Side Spray (500S Only)
- Pforever Seal Ceramic Disc Valves
- Pforever Warranty®

Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead)
- Cal Green Compliant
- ADA Compliant-ANSI A117.1 (Lever handles only)

Dimensions

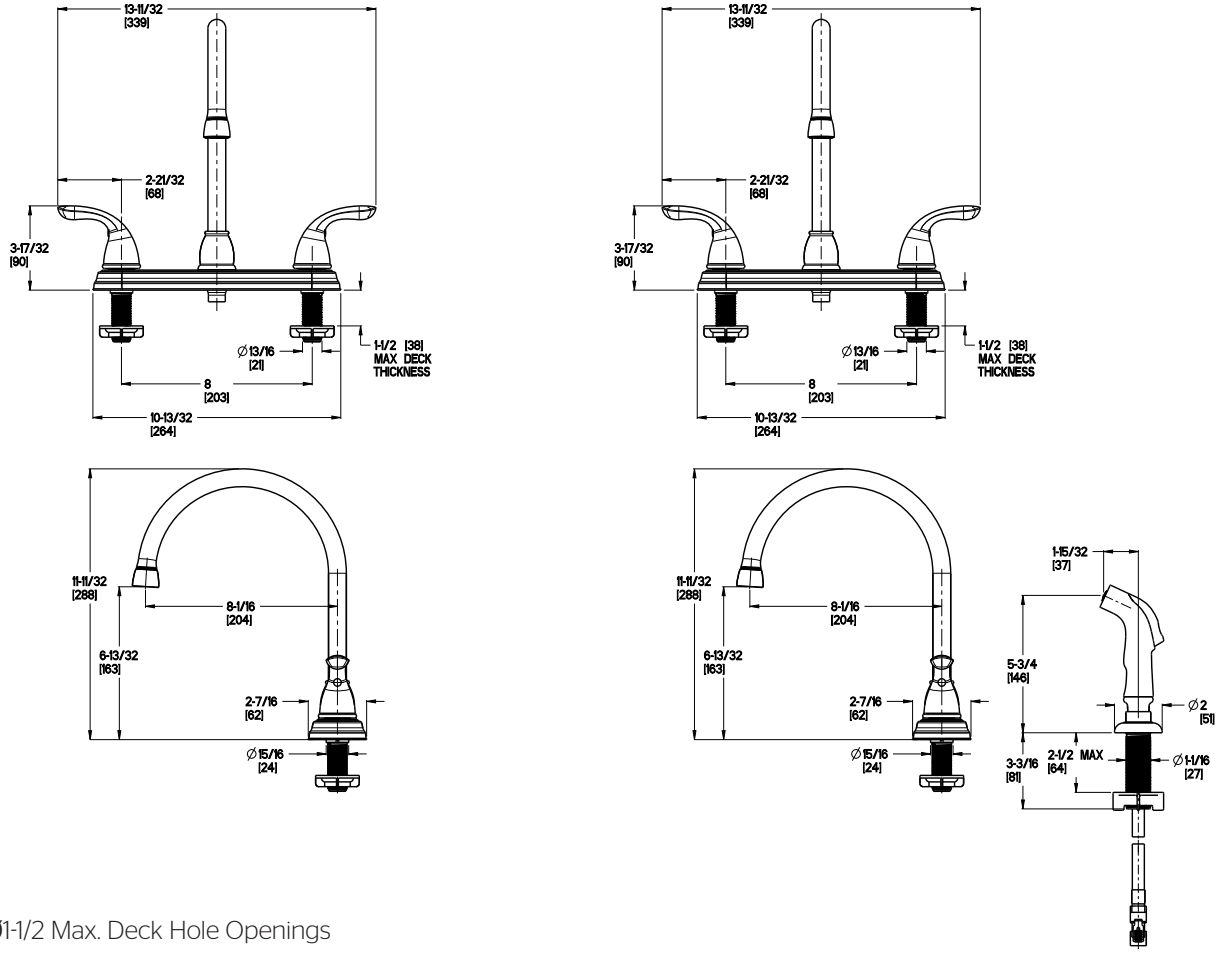

Ø1-3/8 Min to Ø1-1/2 Max. Deck Hole Openings

Copyright © 2013, Pfister Inc.