


### METACAULK® 1000 INTUMESCENT FIRESTOP SEALANT



Metacaulk® 1000 is a water-based, flexible, highly intumescent sealant designed for use on metal, insulated, fiberglass and plastic pipes. It can also be used for top of the wall construction joints, as well as power and telephone cables. STC rating 54, Tested in a UL 411 wall assembly/section to ASTM E90.



Metacaulk® 1000 is applied with a conventional caulking gun, bulk loading gun or can be troweled from the pail. For large applications, it can be pumped directly from the pail.

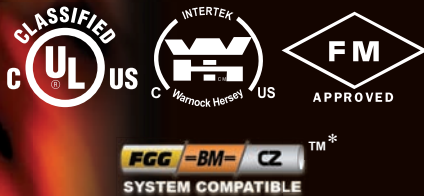

- UL Classified systems up to 4 hours
- Meets ASTM E 814, UL 1479 & UL 2079 Standards
- Excellent Freeze-Thaw
- Non-sagging, non-toxic, no VOC's
- Flexible Set
- Economical
- Highly Intumescent
- For interior use - Paintable
- Available in cartridges & pails

Code	Description	Quantity per Case
66302	10.3 oz. Cartridge	24
66303	30 oz. Cartridge	12
66312	20.2 oz. Sausage Pack	12
66305	1 Gallon	4
66307	2 Gallon	1
66309	5 Gallon	1

Metacaulk® 1000 will prevent the spread of flames, smoke, hot gases and water through joint openings and through-penetrations. No dilution or mixing is required for use. No special skills are necessary for installation.

Metacaulk® 1000 has passed ASTM E 1966/UL 2079 for top of the wall applications with or without backing and as little as 1/4 inch depth of caulk. The test assembly was also subjected to 500 cycles on a specially built machine that successfully demonstrated the product's durability and movement characteristics.

### METACAULK® 350i INTUMESCENT FIRESTOP SEALANT



Metacaulk® 350i is a one-component, general purpose fire-rated sealant and smoke seal for construction joints and through-penetrations. Metacaulk® 350i is an intumescent, water-based, non-sag caulking grade sealant that is easy to apply and great for retrofits. It cures to an elastomeric seal that is suitable where dynamic movement is expected. STC rating 53, Tested in a UL 411 wall assembly/section to ASTM E90.



Code	Description	Quantity per Case
66610	10.3 oz. Cartridge	24
66612	30 oz. Cartridge	12
66611	20.2 oz. Sausage Pack	12
66613	5 Gallon	1

- Meets ASTM E 814 (UL 1479) & ASTM E 1966 (UL 2079) Standards
- Highly Intumescent
- Non-sagging, non-toxic, no VOC's
- Excellent Freeze-Thaw
- Sound Rated

\* FGG/BM/CZ™ System Compatible™ indicates that this product has been tested, and is monitored on an ongoing basis, to assure its chemical compatibility with FlowGuard Gold®, BlazeMaster® and Corzan® pipe and fittings.  
 \*\* FGG/BM/CZ™, FlowGuard Gold®, BlazeMaster® and Corzan® are licensed trademarks of the Lubrizol Corporation.