



# JOHNSTONE SUPPLY

Your HVACR Source



## Sensational Savings on Every Page!

### Silicon Carbide Hot Surface Igniter

- 5.5" lead length
- Molex internally keyed connector with .093" male pins



Supplier of the Month  
**White**  
Rodgers

**14<sup>99</sup>**

L37-698  
Mfg.# 767A-369

Visit [www.emersonclimaterewards.com](http://www.emersonclimaterewards.com) for details.

### Universal Ignition Gas Valve

- 1/2" X 3/4" Combo
- For use on LP or natural gas applications
- Snap acting
- Coil voltage: 24VAC; 0.45 Amps



*Robertshaw*

**79<sup>99</sup>**

L37-849  
Mfg.# 720-079

### Foam Insulation Tape

- Easy-to-use tape that quickly insulates closed cell pipe
- 1/8" T x 2" W x 30' L




**Parker**

**749**

G89-930  
Mfg.# K501

### New Extendable Magnetic Flashlight

- 3 bright LEDs
- Flexible shaft extends from 6-1/2" to 21" for hard-to-reach places



**12<sup>99</sup>**

G35-864  
Mfg.# EMF-1

### Access Valve Drier

- 1/4" OD Conn.: 3 cu. in.
- R22/R410A capacity 0.5 ton
- Sold in 3 packs, priced each



**5<sup>99</sup>**

B10-164  
Mfg.# 620-SP

### Universal 120 Volt Nitride Upgrade Kit

- Replaces silicon carbide ignitors with sturdier nitride design
- No power module needed



Supplier of the Month  
**White**  
Rodgers

**18<sup>99</sup>**

L41-806  
Mfg.# 21D64-2

Visit [www.emersonclimaterewards.com](http://www.emersonclimaterewards.com) for details.

### Emerson Blue™ Thermostat

- 4 sq.in display
- Single stage
- For 24 VAC or millivolt systems
- System Application: Heat/Cool/Heat Pump
- Stages Heat/Cool: 1/1
- Power Method: Hardwired or Battery



Supplier of the MONTH  
**White**  
Rodgers

**49<sup>99</sup>**

L41-639  
Mfg.# 1F80-0471

\*Visit [www.emersonclimaterewards.com](http://www.emersonclimaterewards.com) for details.



### New Refrigerator Evaporator Motor

- Ball bearing
- 1550 RPM
- Single speed
- Diam.: 3.3"
- HP: 1/12
- Volts: 115/230



**39<sup>99</sup>**

S59-318  
Mfg.# 9664

\*Visit [www.emersonclimaterewards.com](http://www.emersonclimaterewards.com) for details.



### Universal Silicon Carbide Integrated Furnace Control

- Use in natural and LP Gas applications
- Ignition trial time: 4 seconds; prepurge time: 30 seconds; retries: 2 times



Supplier of the MONTH  
**White**  
Rodgers

**87<sup>99</sup>**

L39-566  
Mfg.# 50A55-843

\*Visit [www.emersonclimaterewards.com](http://www.emersonclimaterewards.com) for details.



Prices Valid November 1–30, 2011



### Digital Capacitor Tester

- Rates run, start and DC electrolytic capacitors
- Two read-out ranges: 0.01 to 10 MFD and 10 to 10,000 MFD
- Includes soft carrying case
- Uses 9V battery (not included)



**69<sup>99</sup>**

H24-883  
Mfg.# MFD-10

### 3-Speed Direct Drive Blower Motor



- 49 frame, 3 speed
- 1075 RPM, sleeve bearing, horizontal mounting
- Diam.: 5-5/8"
- HP: 1/2
- Volts: 115



**74<sup>99</sup>**

S88-539  
Mfg.# DL1056

### Leak Lock

- Permanent; flexible
- For piping metal or plastic
- 1.3 oz. tube



**2<sup>99</sup>**

B10-853  
Mfg.# HS10001

### Condensate Pump

- 15' Shutoff
- 115V
- Includes check valve



**29<sup>99</sup>**

B82-021  
Mfg.# VCMA-15UL

### 100% Industrial Grade RTV Silicone Sealant

- Hi temp
- 10.1 oz. cartridge
- Red



**5<sup>89</sup>**

G80-009  
Mfg.# 0809/01

### Digital Pocket Thermometer

- Protective boot with built-in magnet
- Temperature range: -58°F to +571°F



**9<sup>99</sup>**

H25-961  
Mfg.# 550B

### Scrubs® In-A-Bucket

- Premoistened
- Textured on one side, soft on the other
- 80 wipes per bucket



**15<sup>99</sup>**

W89-187  
Mfg.# 4366-87

### Glowfly™ Universal Hot Surface Igniter

- Single kit
- Replaces over 110 igniter models
- Silicon nitride design, less prone to breakage



**25<sup>99</sup>**

L44-845  
Mfg.# Q3200U1004

### Silicon Carbide Hot Surface Igniter

- 5.25" lead length
- Receptacle with .093" male pins



White  
Rodgers



**12<sup>99</sup>**

L39-089  
Mfg.# 767A-373

Visit [www.emersonclimaterewards.com](http://www.emersonclimaterewards.com) for details.

### Silicon Nitride Igniter

- Replaces Lennox 768A-4 (41K5601 & LB-109261A)
- Teflon™ coated leads



White  
Rodgers



**22<sup>99</sup>**

L40-828  
Mfg.# 768A-844

### Thermocouple

- 30 mV
- 11/32 32 male connector nut connection
- 30 in. leads



**6<sup>59</sup>**

L37-021  
Mfg.# Q340A1082

### FocusPRO® Digital Thermostat

- Non-Programmable
- Up to 2 Heat/2 Cool
- Conventional, heat pump or 750 mV heating systems



**48<sup>99</sup>**

L40-704  
Mfg.# TH5220D1003

### 6-in-1 Screwdriver

- Includes 4 screwdriver sizes and 2 nut drivers
- Slip-resistant grip



**5<sup>99</sup>**

H25-245  
Mfg.# 23931



## Cold Weather Duct Tape

- Installation temperature range of -20°F to 250°F

**Shurtape®**



**6.49**

G80-652

G80-653

Order #	Mfg. #	Description	Color	Size In. x Yds.	Price
G80-652	AF-975	Alum Foil/Cold Temp	Silver	2.0 x 50	6.49
G80-653	AF-975	Alum Foil/Cold Temp	Silver	3.0 x 50	9.99

## Hot Surface Igniter

- 10" lead length
- 120 VAC
- Designed to reach ignition temperature within 17 seconds



**13.99**

L38-693

Mfg.# FC-035KJ

## Hot Surface Igniter

- 5" lead length
- 120 VAC
- Designed to reach ignition temperature within 17 seconds



**10.99**

L45-545

Mfg.# DS408KJ

## Therm-o-Disc Heat Sequencer

- 1 switch
- On timings: 1-20 sec.
- Off timings: 40-110 sec.

**9.99**

L36-475

Mfg.# 24A34-1



**Supplier**  
of the MONTH

**White**  
Rodgers

## Therm-o-Disc Heat Sequencer

- 2 switches
- On timings: 30-90 sec.
- Off timings: 1-30 sec.

**11.99**

L36-478

Mfg.# 24A34-4



**Supplier**  
of the MONTH

**White**  
Rodgers

## Combustion Blower Motor

- Leads and plug assembly duplicate original, thermally protected ball bearing
- Replaces 120V Carrier #HC-660-005
- Volts: 120

**64.99**

S58-569

Mfg.# 65569



## Pilot Burner

- For natural gas with a BCR-18 orifice
- Front single tip style
- "B" mounting bracket
- Non-primary aeration



**Honeywell**

**19.99**

L38-357

Mfg.# Q345A1305

## 4-in-1 Multi-Socket Nut Driver

- Includes 1/4", 5/16", 3/8" and 7/16" nut drivers
- Slip-resistant grip



**8.99**

H26-280

Mfg.# DA86420

## FocusPRO™ Programmable Thermostat

- 5-1-1 day program or 5-2 day program
- Adaptive Intelligent Recovery™
- Automatic/manual changeover
- Up to 2 Heat/2 Cool

**64.99**

L40-702

Mfg.# TH6220D1002



LEARN MORE AT  
energystar.gov

## Wire Connectors

- Orange
- 22-14 gauge
- 100 pk.
- 600V



**2.99**

G21-352

## 14" Duct Tie

- UV Resistant
- Package of 100



**7.99**

G22-855



Winter Savings



### Intercity Replacement Draft Inducer Blower

- Replaces Intercity #1011350 and R7-RFB350
- Single speed, 3450
- HP: 1/18
- Volts: 115

**199<sup>99</sup>**

X89-977  
Mfg.# A173



### Rheem Replacement Draft Inducer Blower

- Replaces Rheem #70-22838-02, 70-24157-03, and 117847-07
- 3000 RPM
- Ball bearing
- Rotation: CWSE
- Volts: 120

**149<sup>99</sup>**

X89-593  
Mfg.# 66847



### Blower Motor Permanent Split Capacitor

- 48 frame, 3 speed, 1075 RPM, SAB bearings, all-angle mounting
- Diam.: 5-5/8"
- HP: 1/2
- Volts: 115

**74<sup>99</sup>**

S88-548  
Mfg.# 1865



Supplier of the MONTH



\*Visit [www.emersonclimaterewards.com](http://www.emersonclimaterewards.com) for details.

### Control Transformer

- Class 2 rated, easily mounts for use on low voltage control circuits
- Designed for over 60,000 hours of continuous use under normal load conditions



**7<sup>99</sup>**  
G22-336

### Dual Element Cartridge Fuse

- Operates cooler than any other type fuse, prevents needless blows and heat damage
- Rejection type



COOPER Bussmann

**1<sup>99</sup>**  
G31-525  
Mfg.# ECNR-30

### New 4 Wing Flexible Mount Bracket



- Mounting legs are evenly spaced at 90° angles
- Mounting Centers: 9" or 10"
- For Use With: 5.5" Motors

**17<sup>99</sup>**

S59-355  
Mfg.# FM554



### 3-Speed Direct Drive Blower Motor



- 48 frame, 3 speed, 1075 RPM, sleeve bearing, horizontal mounting
- Diam.: 5-5/8"
- HP: 1/3
- Volts: 115

**69<sup>99</sup>**

S88-538  
Mfg.# DL1036



### Control Transformer

- Class 2 rated, easily mounts for use on low voltage control circuits
- Designed for over 60,000 hours of continuous use under normal load conditions
- 8" wire length
- VA Rating: 75
- Primary Voltage: 120/208/240/480
- Secondary Voltage: 24



**27<sup>99</sup>**  
L37-310

### Consolidator Condenser Fan Motor with F Type Insulation



- 48 frame, 2 speed, 1075 RPM, ball bearing, all-angle mounting
- Diam.: 5-5/8"
- HP: 1/3-1/6
- Volts: 208-230

**59<sup>99</sup>**

S89-577  
Mfg.# 5458



### 3-Speed Blower Motor

#### 48 Frame Permanent Split Capacitor

- 48 Frame, PSC, SAB Bearing, 1075 RPM, all angle mounting
- Four studs shaft end on 5-1/8" bolt circles
- Sleeve bearing for all angle mounting, thermal protector
- Rotation reversed by electrical connection, 2-1/2" hub rings for base mounting included
- Diam.: 5-5/8"
- HP: 1/2
- Volts: 208-230

**79<sup>99</sup>**

S88-549  
Mfg.# 1973



Supplier  
of the MONTH




\*Visit [www.emersonclimaterewards.com](http://www.emersonclimaterewards.com) for details.

### Rheem Replacement C-Frame Switch Motor

- Single-speed
- Sleeve bearing
- 3000 RPM
- Replacement for Rheem #51-21964-01, Fasco #7102-0628, and Goodman #B19400-00
- HP: 1/200
- Volts: 208-230

**89<sup>99</sup>**

S88-888  
Mfg.# K628



### ATC Blade Type Fuse

- Non-time-delay type
- Totally enclosed fuse link confines arc
- For mounting in specially designed fuse blocks for furnace circuit boards

**59¢**

G32-043  
Mfg.# ATC-5



### 3-Pole Definite Purpose Contactor

- Removable front cover
- Exceeds ARI-780 standard including 10,000 recycle test
- Sealed housing and side shields
- Ind. F/L Amps: 40
- Poles: 3
- Coil Voltage: 208/240

**28<sup>99</sup>**

L36-692  
Mfg.# C25DNF340B



### Torsion Type Flexible Mount

- Designed for direct drive blower motors
- Mounting Centers: 9" or 10"
- Motor Diam.: 5.5"

**17<sup>99</sup>**

S58-703



### Solderless Terminal Kit

- Labeled, high impact polypropylene case with 18 compartments
- Contains 25 each of the most popular terminals

**39<sup>99</sup>**

G31-973  
Mfg.# JKIT



### Double Inlet Replacement Blower Wheel

- For heating and air conditioning use
- CW rotation
- Direct drive
- Concave center disc
- Diameter: 10-5/8"
- Width: 10-5/8"

**44<sup>99</sup>**

W88-949  
Mfg.# 01331602





## Direct Drive Blower Motor

- 3-speed, PSC, sleeve bearing. 1075 RPM, 3 speed, resilient mounting
- Rotation: Plug reversible, capacitor not included
- Diam.: 5-5/8"
- HP: 3/4-1/3
- Volts: 277

**179<sup>99</sup>**

S88-585  
Mfg.# D970



## Oil Burner Motor

- For use with AF, AFG, NX and all "M" flange burners
- Lower amp draw and cooler operation than shaded pole models
- Thermal protector with automatic reset
- Ball bearing construction, proven dependability, PSC design
- HP: 1/7
- Volts: 115

**49<sup>99</sup>**

S89-230  
Mfg.# 21805U



*Beckett*

## Open Ventilated Motor

- Used on fans and blowers
- Studs: 4 extended on each end, 9/16" long on 2.84" centers
- 2 black leads 14" long, 18 gauge
- Non-reversible, thermal overload protector
- Diam.: 3-3/8"
- HP: 1/20
- Volts: 115

**42<sup>99</sup>**

S58-222  
Mfg.# D132



## Gas Conversion Burner

- Easily converts oil fired boilers, furnaces and water heaters to natural gas
- Maximum Btu input: 250,000
- Air tube size: 4" D, 8-1/8" L
- Gas connection: 1/2" NPT



**499<sup>99</sup>**

L86-170  
Mfg.# 63366



## Oil Burner Nozzle

- Hollow cone nozzle designed to create clean, quiet efficient fire for stable flame at low flows
- Recommended for trial on burners without distinct air patterns



**3<sup>99</sup>**  
L37-042


*DEHAVAN*

## Trane Replacement Draft Inducer Blower

- Direct Replacement for Trane
- Bearing sleeve
- 3000 RPM
- Rotation: CCWSE
- HP: 1/29
- Volts: 208-230

**129<sup>99</sup>**

X89-695  
Mfg.# A150



## Fuel Oil Filter Cartridge

- Wool felt element refill
- 10 micron rating



**1<sup>19</sup>**  
L37-080  
Mfg.# 1A-30

*General*

## Fuel Oil Unit

- Suitable for No. 1 and No. 2 fuel oil or kerosene
- May be mounted in any position, except upside down
- Rated to 17" HG vacuum two pipe Factory set at 100 PSI



**99<sup>99</sup>**  
L86-150  
Mfg.# B2VA-8216

## Motor for Fan Coil Air Conditioning/Heating Units

- Multi-Speed, PSC
- 1050 RPM
- Sleeve bearing
- 4 speed
- Diam.: 5"
- HP: 1/10-1/40
- Volts: 115

**179<sup>99</sup>**

S88-113  
Mfg.# D291



## Oil Burner Ignition Transformers

- 120VAC, 60Hz, output 10,000 V



**79<sup>99</sup>**  
L86-093  
Mfg.# 5LAY-04

*FRANCE*

## Electronic Oil Igniter

- Input: 120VAC, 60 Hz, 35VA
- Output voltage: 6 kV RMS, 20 kV PEAK
- Output current: 35mA RMS
- Ambient operating temperature: -20°F to +150° F



**39<sup>99</sup>**  
L39-149  
Mfg.# 51771U

*Beckett*

## Cartridge Circulator Pump

- Designed for hydronic heating and chilled water systems
- Operates in systems up to 125 PSI and 230°F
- 3250 RPM
- Cast iron body and flanged connection
- Compact, lightweight, self-lubricating, direct drive design
- Wet rotor circulator

**79<sup>99</sup>**

L86-128  
Mfg.# 007-F5



Do it once.  
Do it right. **TACO**

## Circulator Pump

- High starting torque prevents rotor lock-up even after seasonal shutdown
- Water lubricated — maintenance free
- UPS series 3-speed pumps easily set to match system requirements and provide energy savings
- All UPS pumps include integrated check valves

**269<sup>99</sup>**

L87-202  
Mfg.# UPS26-99FC 115V



GRUNDFOS



Supplies

## Pressure Safety Relief Valve For Protection of Hot Water Heating Boilers

- Designed and recommended for hot water heating and supply boilers
- ASME certified
- Pressure pre-set @ 30 PSI
- Maximum temperature: 250°F (121°C)
- Model #: 374A
- Inlet Conn.: 3/4"
- Outlet Conn.: 3/4"

**32<sup>99</sup>**

R54-684  
Mfg.# 358553



WATTS

## Hot Water Expansion Tank

- Pre-pressurized, diaphragm-type expansion tank with a standard charge of 12 PSI
- Tanks are of welded vsteel construction
- Can be used in glycol systems and should be installed into bottom of purger using a single 1/2" nipple for both pipe connection and mounting
- Type: Extrol - Hydronic

**29<sup>99</sup>**

L86-191  
Mfg.# 30

AMTROL INC.



## Pressure Reducing Valve

- Pressure Range PSIG: 10 to 25
- Each valve is equipped with a low inlet pressure check valve and a removable strainer
- Conn. Size: 1/2"

**39<sup>99</sup>**

L37-832  
Mfg.# FB-38



## Electric Zone Valve

- The silent operation permits installation in or near rooms where noiseless operation is essential
- Heavy bronze body with sweat or threaded connections
- For heat pump and geothermal applications

**79<sup>99</sup>**

L37-501  
Mfg.# 555-050RP



Do it once.  
Do it right. **TACO**

## Booster Pump

- Oil lubrication system
- Proven mechanical seal to protect against water leakage
- Sleeve-type extra long bearings
- Centrifugal impeller design
- Does not include flanges
- Series: 100 NFI

**229<sup>99</sup>**

L86-074  
Mfg.# 106189





### Gas Valve

- Standing pilot
- Natural gas
- 24 VAC
- Fast open



Supplier of the Month  
**White**  
Rodgers

**54<sup>99</sup>**  
L37-502  
Mfg.# 36C03-300

### OEM Replacement Ignition Control

- Replacement for Carrier #HK42FZ models
- Diagnostic LED's aid in troubleshooting



**119<sup>99</sup>**  
L43-837  
Mfg.# ICM282C

### Heavy Duty Enclosed Fan Relay

- WR/RBM Type 184
- Coil Voltage: 24 VAC
- SPDT



Supplier of the Month  
**White**  
Rodgers

**6<sup>99</sup>**  
L37-098  
Mfg.# 90-370

Visit [www.emersonclimaterewards.com](http://www.emersonclimaterewards.com) for details.

### Enclosed Fan Relay

- WR/RBM Type 84
- Coil Voltage: 24 VAC
- SPDT



Supplier of the Month  
**White**  
Rodgers

**5<sup>99</sup>**  
L36-905  
Mfg.# 90-293Q

Visit [www.emersonclimaterewards.com](http://www.emersonclimaterewards.com) for details.

### 720 Series Dual Valve Control

- 1/2" X 3/4" combo gas valve
- 150,000 Btu
- 24 VAC, .5 Amps, 50/60 Hz



**49<sup>99</sup>**  
L37-540  
Mfg.# 720-400

### 720 Series Dual Valve Control

- 1/2" X 1/2" 24VAC step opening pilot
- Convertible regulator
- 150,000 Btu



**99<sup>99</sup>**  
L37-714  
Mfg.# 720-474

### Compact Gas Valve

- Millivolt model
- 1/2" X 1/2" low profile combo
- Natural gas 70,000 Btu/L.P. gas 112,000 Btu



**74<sup>99</sup>**  
L37-437  
Mfg.# 710-502

### Compact Gas Valve

- Hydraulic snap action model
- 1/2" X 1/2" low profile combo
- Natural gas 70,000 Btu



**99<sup>99</sup>**  
L37-525  
Mfg.# 710-205

### Fan and Limit Controller

- 5 in. insertion
- 125°F fan on and 100°F fan off stops
- 200°F high limit stop
- Forced warm air heating systems



**61<sup>99</sup>**  
L86-051  
Mfg.# L4064B2228

### Dual Standing Pilot Gas Valve

- 24 VAC
- Inlet/outlet: 1/2 in. x 1/2 in.
- Standard opening
- 3.5 in. wc pressure regulator setting



**57<sup>99</sup>**  
L37-432  
Mfg.# VR8200A2132

### Replacement Generator

- For millivolt applications
- Output: 750mV
- Length: 36"
- Mounting nut and spring clip



**15<sup>99</sup>**  
L36-075

### Electric Furnace Restring Kit

- 5.0 K.W. 5000 Watts 240 Volt
- Stretch length: 46"-110"



**5<sup>99</sup>**  
L36-953  
Mfg.# 24501

### Automatic Pilot Re-Light Kit

- Combination 24VAC or 120VAC module
- All hardware included to replace similar type modules



**29<sup>99</sup>**  
L38-127  
Mfg.# 785-001

### Zone Valve

- Sweat connection
- Normally closed
- 3.5 Cv capacity
- 18 in. leads and end switch
- 24V 3/4 in.



**67<sup>99</sup>**  
L37-346  
Mfg.# V8043E1012

### Fan Control Center

- Primary - 120VAC, 60 Hz
- Secondary - 24V, 40VA
- SPDT
- Mounts to 4" junction box



Supplier of the Month  
**White**  
Rodgers

**17<sup>99</sup>**  
L37-811  
Mfg.# 90-113

Visit [www.emersonclimaterewards.com](http://www.emersonclimaterewards.com) for details.

### Electronic Temperature Control

- Single stage
- Temperature range (-30°F to +220°F)
- SPDT
- NEMA 1 enclosure



**17<sup>99</sup>**  
L38-382  
Mfg.# ETC11000

Visit [www.emersonclimaterewards.com](http://www.emersonclimaterewards.com) for details.

## Remote Bulb Temperature Control

- Temperature range: -30°F to +100°F
- Switch action: SPDT
- Differential: 3° to 12°



Johnson Controls

**59<sup>99</sup>**

L36-932  
Mfg.# A19BBC-2

## Refrigeration Temperature Control

- Capillary length 5 ft.
- Close on rise
- -30°F to +90°F range



Supplier of the Month

White  
Rodgers

**38<sup>99</sup>**

B10-821  
Mfg.# 1609-101

Visit [www.emersonclimaterewards.com](http://www.emersonclimaterewards.com) for details.

## Protectorelay® Oil Burner Control

- 45 sec. lock out timing
- Solid state flame sensing circuit
- Mounts on standard 4 x 4 in. junction box

**57<sup>99</sup>**

L37-519  
Mfg.# R8184G4009



Honeywell

## Universal Programmable Thermostat

- 7 day multiple day programming or non-programmable
- Automatic/manual changeover
- Up to 3 Heat/2 Cool stages

**137<sup>99</sup>**

L40-435  
Mfg.# TH8320U1008



## Direct Spark Ignition Control

- 24VAC
- 50/60 Hz
- Ignition trial time 8 sec.
- Prepurge period 30 sec.

**69<sup>99</sup>**

L40-353  
Mfg.# BG1100MADL-1GCJ

BASO  
BASO Gas Products LLC



## Pilot Burner

- For natural or LP gas with a BCR-18 orifice
- Front single tip style
- "B" mounting bracket
- Non-primary aeration



Honeywell

**18<sup>99</sup>**

L39-045  
Mfg.# Q314A4586

## Combination Control Valve

- 1/2" X 3/4" combo gas valve
- 12 VDC 0.18 Amps
- 24 VAC 0.2 Amps 50/60 Hz
- 240,000 Btu

**59<sup>99</sup>**

L36-403  
Mfg.# 700-400



Robertshaw

## Flame Sensor

- Replaces Carrier/BDP #LH33WZ511
- Designed for use in gas ignition systems using Carrier #LH33ZS002 or Robertshaw #41-409 (L37-816) hot surface igniter

**12<sup>99</sup>**

L39-003  
Mfg.# 10-681



Robertshaw

## Gas Ignition System

- 1/2" X 3/4" combo gas valve
- 780-715 non-lockout ignition
- Natural gas
- 200,000 BtuH capacity



**114<sup>99</sup>**

L36-962  
Mfg.# 712-017

Robertshaw

## SmartValve® Control

- 1/2 in. NPT x 1/2 in. NPT
- Intermittent hot surface pilot ignition
- Slow opening
- 3.2 in. wc pressure regulator setting



**144<sup>99</sup>**

L38-720  
Mfg.# SV9502H2522

Honeywell

## SmartValve® Control

- 3/4 in. NPT x 3/4 in. NPT
- Intermittent hot surface pilot ignition
- Standard opening
- 3.5 in. wc pressure regulator setting



**164<sup>99</sup>**

L41-676  
Mfg.# SV9641M4510

Honeywell



### 18" Gas Furnace Connector

- 5/8" o.d.
- 1/2" FIP x 1/2" MIP
- Tapped 3/8" FIP
- 164,200 BtuH



**649**  
R87-519  
Mfg.# 30-3132-18

### 24" Gas Furnace Connector

- 5/8" o.d.
- 1/2" FIP x 1/2" MIP
- Tapped 3/8" FIP
- 150,000 BtuH



**799**  
R87-520  
Mfg.# 30-3132-24

### 24" Hi-BTU Gas Connector

- 1" o.d.
- 3/4" MIP x 3/4" FIP
- 290,900 BtuH



**34<sup>99</sup>**  
R87-610  
Mfg.# 41-4142-24

### 36" Hi-BTU Gas Connector

- 1" o.d.
- 3/4" MIP x 3/4" FIP
- 255,900 BtuH



**44<sup>99</sup>**  
R87-611  
Mfg.# 41-4142-36

### Scotch Super 33+ Electrical Tape

- Installs in temperatures of 0°F to 220°F
- UV resistant
- 3/4" x 66'



**489**  
G21-197

### Electrical Outlet Box

- 2-1/8" deep single gang box w/1/2" KO's



**179**  
G31-409  
Mfg.# 58371-1/2

### Woven Duct Strap

- High tensile and abrasion resistant polypropylene
- 1-3/4" x 100'



**399**  
R54-946  
Mfg.# 710-100

### Teflon® Paste

- Thread lubricant and sealant
- 4 fl. oz. bottle
- White



**499**  
R53-743

### 36" Gas Water Heater Connector

- 1/2" o.d.
- 1/2" FIP x 1/2" MIP
- Tapped 3/8" FIP
- 71,100 min. BtuH



**929**  
R87-397  
Mfg.# 20-3132-36

### 48" Gas Water Heater Connector

- 1/2" o.d.
- 1/2" FIP x 1/2" MIP
- Tapped 3/8" FIP
- 60,500 BtuH



**10<sup>99</sup>**  
R87-412  
Mfg.# 20-3132-48

### Stainless Steel Gas Hearth Connectors

- Specifically engineered for hearth applications such as gas logs, fireplace inserts and freestanding fireplaces



**14<sup>99</sup>**  
R87-608



Order #	Mfg. #	Min. BtuH Capacity	Fitting Size	O.D.	I.D.	Price
R87-608	10A-2135-24	40,000	3/8" MIP x 1/2" FIP Valve	3/8"	1/4"	14.99
R87-609	20A-3135-24	85,000	1/2" MIP x 1/2" FIP Valve	1/2"	3/8"	17.99

### Furnace Mounting Pad

- Anti-vibration support
- Carrying capacity - up to 500 lbs.



**169**  
R55-601  
Mfg.# FB-1

### AutoFlare® Fitting

- For 3/4" pipe
- Fits TracPipe® and Counterstrike®
- Self-flaring with metal-to-metal gasket



**1149**  
R54-701  
Mfg.# FGP-FST-750

### Condensate Trap

- Transparent trap allows visual inspection
- Watertight lower cap opens for easy access
- Includes flexible cleaning brush



**699**  
B13-547  
Mfg.# EZT-113B

### Cold Weather Duct Tape

- 3" x 50'
- For extreme temperatures between -35°F and 260°F



**10<sup>99</sup>**  
G80-556  
Mfg.# 330

## Universal Air Switch

- Replaces hundreds of small footprint air switches
- Five separate springs cover ranges from .05" W.C. to 10" W.C.

**16<sup>99</sup>**

L45-006  
Mfg.# NS2-0000-03



## Universal Intermittent Pilot Ignition Control

- 24VAC
- 50/60 Hz pilot 1A max. and main 2A max.
- 100% shutoff/lockout with 5 min. continuous retry

**74<sup>99</sup>**

L38-259  
Mfg.# BG1600M51EF-1AACJ



## Universal Humidifier Solenoid

- One unit replaces 32 different OEM solenoids in the field
- Flow can be reversed by removing two screws, turning the solenoid 180 degrees
- 24V

**33<sup>99</sup>**

B17-395  
Mfg.# UHS24



## Universal Hot Surface Igniter Kit

- Features "glow bar" double helix design
- Direct replacement for most popular igniters

**16<sup>99</sup>**

L40-765  
Mfg.# FC-067KJ



## Universal Hot Surface Ignition Control

- 120 VAC (up to 5A) HSI elements
- Single rod (local sense) or dual rod (remote sense)
- Natural or LP gas
- One or three ignition trials per call for heat
- Four-second or seven-second ignition trials

**94<sup>99</sup>**

L37-928  
Mfg.# S8910U1000




## Multi-tap Transformer

- Used with Mod IV Series 1 actuator
- Primary voltage: 120/208/240 VAC
- Secondary voltage: 24 VAC
- Mounts internally

**47<sup>99</sup>**

L37-646  
Mfg.# 198162AA

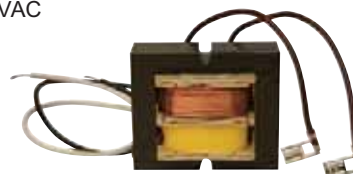

## Universal Intermittent Pilot Retrofit System

- Y-pack contains S8610U3009 and VR8204A2142, 1/2 in. by 1/2 in. inlet/outlet, flange kit, LP conversion kit
- Electronic control of intermittent pilot ignition systems used on gas fired furnaces, boilers, and other heating appliances

**154<sup>99</sup>**

L38-263  
Mfg.# Y8610U4001



## Triple "D" Universal Coil Cleaner

- For use on condenser and evaporator coils
- Metal safe and does not attack aluminum or copper components

**11<sup>95</sup>**

B85-647  
Mfg.# TRIPLE-D





# Boost Your Profits with Emerson and U.S. Motors

Roll into your local Johnstone Supply location and stock up on Emerson parts and solutions. Universal parts save time and money with single so

## Rescue® Motors The Ultimate Truck Stock Motor™

- Reduce truck inventory and replace hundreds of OEM motors
- Multi-Horsepower rated, covering the most common blower motors
- Flexible mounting, allows for applications requiring side shell holes, belly band, resilient or stud mounting
- 48 frame, 5.6" diameter, 1075 RPM, 4-speed



79<sup>99</sup>  
S89-093

Description	Part #	JS Part #	Price
Blower Motor 115V 1/2-1/6 HP 1075 RPM	5460	S89-093	79.99
Blower Motor 208-230V 1/2-1/6 HP 1075 RPM	5461	S89-094	74.99
Blower Motor 115V 3/4-1/5 HP 1075 RPM	5470	S89-287	84.99
Blower Motor 208-230V 3/4-1/5 HP 1075 RPM	5471	S89-288	89.99

## Maximum Compressor Protection

Filter driers in today's market must be able to remove solid contaminants as well as both moisture and acid. Emerson® filter driers offer the industry's best combination of these to ensure your compressor will be protected.



Description	Part #	JS Part #	Price
Liquid Line	EK 08 3 S STD	B12-260	12.99
Liquid Line	EK 16 3 S STD	B12-266	14.99
Suction	SFD 13 S 6 VV	B12-522	29.99
Suction	SFD 13 S 7 VV	B12-523	29.99

## Premium GripTwist Belts

- Adjustable to any length
- Available in 5' sections or 100' rolls
- Runs cooler and dissipates heat
- Great for high temperature applications up to 250° F
- Delivers highest horsepower



Description	Part #	JS Part #	Price
3LP 5FT GRIPTWST	2708055	P30-901	25.99
AP 5FT GRIPTWST	2708030	P33-901	27.99
BP 5FT GRIPTWST	2708048	P34-901	29.99

Emerson, Browning, Copeland Scroll and White-Rodgers are trademarks of Emerson Electric Co. or one of its affiliated companies. Rescue and U.S. Motors are registered trademarks of Nidec Motor Corp.

# with Motors®

and U.S. Motors universal  
solutions for multiple needs.



**Coming in January!**

**The Ultimate Truck Stock Give-Away**

**More Products, More Profits and  
Valuable Product Trainings**

[www.johnstonesupply.com/emerson-truckstock](http://www.johnstonesupply.com/emerson-truckstock)



Winter Savings

## Single Stage HSI Integrated Furnace Control Kit

Replaces virtually all White-Rodgers® and competitive  
single stage carbide and nitride HSI systems.

- Can be used on both 80v and 120v ignitor applications
- Fast-install – Includes everything you need for quick and accurate replacement
  - Ignition module
  - Quick-connect harnesses
  - 21D64-2 Nitride Ignitor Kit
  - Installation instructions and OEM cross reference



**99<sup>99</sup>**



**White  
Rodgers.**

Emerson Part #	JS Part #
50M56U-843	L44-863

## Replacement Compressors

Copeland Scroll® ZRK5  
compressors provide a  
focused offering for R-22  
residential and light  
commercial service needs.



Model	JS Part #
ZR18K5-PFV	B91-147

[EmersonClimate.com](http://EmersonClimate.com)  
[www.USMotors.com](http://www.USMotors.com)



Earn double rewards!

**Supplier**  
of the *MONTH*



**EMERSON™**  
Climate Technologies



**Multifit™ Multi-Horsepower Motor TEAO**



- 42 frame, 1 speed
- 1075 RPM, double sealed ball bearings, all-angle mounting
- Diam.: 5"
- HP: 1/4-1/6
- Volts: 208-230

**77<sup>99</sup>**

**S80-339**  
Mfg.# 9723



**Multi-Horsepower Motor**



- Sleeve bearing; 1550 RPM, PSC, open ventilated
- Sleeve bearing
- Dual voltage, thermally protected
- Manufactured with low temperature oil
- Diam.: 3-3/8"
- HP: 1/12-1/20
- Volts: 115/230

**59<sup>99</sup>**

**S59-241**  
Mfg.# D1127



**Evergreen™ Air Handler and Fossil Fuel Retrofit Blower Motor**



- 48 frame, ball bearing
- 115/208-230V
- 80% High efficiency ECM technology
- RPM range: 600-1075
- Diam.: 5-5/8"
- HP: 1/2
- Volts: 115/208-230

**239<sup>99</sup>**

**S81-250**  
Mfg.# 06005



**Turbo™ 200X Universal Replacement Capacitor**

- Replace more than 200 different motor-run capacitors
- Permanent replacement capacitor
- Protected to 10,000 AFC
- 5 year limited warranty
- Mfd: 2.5 to 67.5
- Volts: 370VAC or 440VAC

**47<sup>99</sup>**

**G33-036**  
Mfg.# 12200



**Electric Furnace Sequencer**



- One control switches a fan and up to three elements on and off in sequence
- 24VAC, 60 Hz
- Quick-connect terminals and wiring accessories included for quick and easy wiring and installation
- Stages: 3
- Switches: 4

**91<sup>99</sup>**

**L36-658**  
Mfg.# R8330D1039



**Universal Potential Relay**



- Replacement for all potential motor starting relays for compressors rated at 110 to 270VAC, single-phase, up to 5 HP with any pick-up voltage

**19<sup>99</sup>**

**B11-873**  
Mfg.# SUPR



**Control Transformer**

- Class 2 rated, easily mounts for use on low voltage control circuits
- Designed for over 60,000 hours of continuous use under normal load conditions
- 8" wire length
- VA Rating: 40
- Primary Voltage: 120/208/240
- Secondary Voltage: 24/12/2.5

**13<sup>99</sup>**

**L37-211**



**New Universal Pressure Switch**



- Adjustable Set Points
- Range: 0.25 to 1.0 W.C.
- Temp. Range: -40°F to +190°F

**16<sup>99</sup>**

**L46-061**  
Mfg.# RSS49511



# ALK Aluminum Chimney Liner Kit



- Kit includes length, round top, flashing with 3" collar, mortar guard, fasteners and instructions
- Stretch Ratio 5:1 (approximate)
- Compatible with Type B gas vent systems

Order #	Mfg. #	Size	Price
L98-390	3ALK25	3" x 25'	54.99
L98-244	3ALK35	3" x 35'	64.99
L86-355	4ALK25	4" x 25'	59.99
L86-356	4ALK35	4" x 35'	69.99
L86-357	5ALK25	5" x 25'	68.99
L96-341	5ALK35	5" x 35'	74.99
L96-342	6ALK25	6" x 25'	82.99
L96-343	6ALK35	6" x 35'	99.99



## Media Air Cleaners

- Replaces 2200 & 2400 models
- MERV 10 filtration performance
- Air flow up to 2000 CFM



L99-218

L99-219

# 129<sup>99</sup>

**L99-218**

Order #	Mfg. #	Duct Size	Price
L99-218	2210	20" x 25"	129.99
L99-219	2410	16" x 25"	129.99

## Electronic Air Cleaner

- 16" x 25" w/control
- 2,000 CFM
- Combines electronic cells and pleated media in one unit



# 479<sup>99</sup>

**L96-864**  
Mfg.# 5000

## Media Air Cleaner

- Right angle cartridge type with low pressure drop
- MERV 10



# 119<sup>99</sup>

**L90-783**  
Mfg.# MAC-L

## Media Air Cleaners

- High efficiency media filter captures particles as small as 0.3 microns
- MERV 10



# 79<sup>99</sup>

**L97-390**

Order #	Mfg. #	Description	Duct Size	CFM	Price
L97-390	F100F2002	Media Air Cleaner Without Airwatch	16" x 25"	1,400	79.99
L97-391	F100F2010	Media Air Cleaner Without Airwatch	20" x 25"	2,000	79.99

## Electronic Air Cleaners

- With post filter
- Low pressure drop



# 457<sup>99</sup>

**L97-381**

Order #	Mfg. #	Description	Duct Size	CFM	Price
L97-381	F300E1019	Electronic Air Cleaner With Post-Filter	16" x 25"	1,400	457.99
L97-383	F300E1035	Electronic Air Cleaner With Post-Filter	20" x 25"	2,000	519.99



### Bypass Humidifiers

- Installs on supply or return plenum
- Includes built-in bypass damper
- Output in gallons/day



**109<sup>99</sup>**

B84-264

Order #	Mfg. #	Description	Volts	Output	Price
B84-264	500M	Manual	24	12	109.99
B84-266	600M	Manual	24	16.8	119.99

### Powered Humidifier

- 18 gallons per day output
- 120V



**219<sup>99</sup>**

B84-260  
Mfg.# 700

### Solenoid Valve

- 24V
- Includes fittings



**39<sup>99</sup>**

B14-314  
Mfg.# 4040

### Air Pressure Sensing Switch Kit

- Range: 0.25 to 1.0 W.C.
- Temp. Range: -40°F to +190°F



**16<sup>99</sup>**

L39-313  
Mfg.# RSS-495-210

### Legacy Humidifier

- 24V
- 19.2 gallon per day output
- Includes humidistat



**104<sup>99</sup>**

B81-212  
Mfg.# 1042-LH

### Elite Steam Humidifier

- 25 gallons per day output
- 230V
- Duct mount



**449<sup>99</sup>**

B82-709  
Mfg.# DS25

### Digital Humidifier Control

- For Aprilaire humidifiers
- Can activate blower when heating system is not running



**83<sup>99</sup>**

B16-869  
Mfg.# 58

### Bypass Humidifiers

- Includes humidifier pad, mounting template, self-piercing saddle valve, 24V transformer and a humidity control
- Output in gallons/day



**124<sup>99</sup>**

B82-006

Order #	Mfg. #	Volts	Output	Humidistat	Price
B82-006	HE225H8908	24	12	H8908	124.99
B82-007	HE265H8908	24	17	H8908	139.99

### TrueSTEAM Humidification System

- Provides humidity when needed, regardless of equipment operation
- No tools required to access and clean tank
- Output in gallons/day



**323<sup>99</sup>**

B84-219

Order #	Mfg. #	Description	Volts	Output	Humidistat	Price
B84-219	HM506H8908	Humidifier	120	6	H8908ASPST	323.99
B84-222	HM509H8908	Humidifier	120	9	H8908ASPST	403.99

### Powered Humidifier

- 18 gallons per day output
- 120V



**224<sup>99</sup>**

B82-008  
Mfg.# H8908

### Digital Humidity Control

- Provides low voltage control
- Includes outdoor temperature sensor



**74<sup>99</sup>**

L45-240  
Mfg.# GFX3

### Elite Series Humidifiers

- Includes KineticFlo® distribution system for maximum evaporative performance
- Output is in gallons/day



**99<sup>99</sup>**

B85-649

Order #	Mfg. #	Description	Volts	Output	Price
B85-649	570M	Manual Bypass	24	12	99.99
B85-650	900M	Manual Bypass	24	17	104.99

# Meeting Your Flexible Air Duct Needs With a Wide Range of Quality Solutions



**Quietflex**<sup>®</sup>

877.694.3665

[www.quietflex.com](http://www.quietflex.com)

Available from your local Johnstone Supply

## UV Surface Treatment

- Mounts in supply side
- LED bulb change indicator
- 120V



**Honeywell**

**135<sup>99</sup>**  
L86-488  
Mfg.# UV100A1059

## UV Surface Treatment

- Mounts in supply side
- LED bulb change indicator
- 120V
- Smart Lamp Technology



**Honeywell**

**237<sup>99</sup>**  
L86-979  
Mfg.# UV100E1043

## Replacement Lamp

- Dual lamp replacement bulb
- 36W, 120V




**Honeywell**

**48<sup>99</sup>**  
L86-986  
Mfg.# UC36W1006

## Replacement Lamp

- 16" replacement lamp



**SANUXOX**

**49<sup>99</sup>**  
L80-305  
Mfg.# LMPRGPT160T5

## Saber GENIUS UV Purifier

**SANUXOX**

- 24/110V
- 3" back-lit LCD
- Second lamp included in each unit

**124<sup>99</sup>**  
L80-891  
Mfg.# SABERGN16/24110-G



## R+ In-Duct Air Purifier

**SANUXOX**

- Smart voltage ballast and LCD screen
- For up to 2,000 sq. ft.

**414<sup>99</sup>**  
L80-892  
Mfg.# R+





### Extended Medium Temperature Hermetic Condensing Unit



- Hypercore™ Microchannel condenser coil
- BtuH capacity rating based on 95°F ambient
- BtuH Capacity @ 25°F Evap.: 13,830
- HP: 1-1/2
- Volts: 208-230/1



**1699<sup>00</sup>**

**B94-167**  
Mfg.# CHT015X6BFM

### Low Silhouette Unit Cooler



- Easy front access
- Suitable for use with R22, R507, or R404A
- Defrost: Air
- Volts: 115-1
- BtuH @ 10° TD: 14,000



**699<sup>00</sup>**

**B93-862**  
Mfg.# LSC140AK

### Direct-Acting Solenoid Valve Supplier of the Month

- 3/8" ODF
- R22 Capacity: 1.27 tons
- Valve and coil sold separately



**EMERSON**  
Climate Technologies  
**27<sup>99</sup>**  
**B12-235**  
Mfg.# 100RB2S3

### Solenoid Valve Coil Supplier of the Month

- UL listed; CSA approved
- 120V



**EMERSON**  
Climate Technologies  
**26<sup>49</sup>**  
**B12-311**  
Mfg.# AMG-120

### Replacement Motor

- 1/15 HP, 208-230V, 1550 RPM, 5/16" shaft, CCWSE



**InterLINK**  
Commercial Refrigeration Parts  
**64<sup>99</sup>**  
**S89-827**  
Mfg.# 25309101

### Nu-Brite® Coil Cleaner

- High foaming, non-acid condenser cleaner
- Biodegradable
- 1 Gallon




**Nu-Calgon**  
**14<sup>49</sup>**  
**B81-558**  
Mfg.# 4291-08

Hazardous Material Shipping Alert.

### R404A "A" Series Expansion Valve

Supplier of the Month

- Externally equalized
- Medium Temp
- 3/8" ODF inlet x 1/2" outlet
- Capacity Tons: 1



**EMERSON**  
Climate Technologies  
**52<sup>49</sup>**  
**B18-030**  
Mfg.# AAE1SC

### Head Pressure Control

- 3-way non-adjustable
- Capacity: 2.25 nominal ton capacity for R404a at 2 PSI pressure drop
- Pressure Setting: 180 PSIG



**Parker**  
**79<sup>99</sup>**  
**B17-459**  
Mfg.# LAC-4-180

### CRO Series Crankcase Pressure Regulator

- Conn. Size: 1/2" ODF; Pressure Range PSIG: 0-50R404A
- Capacity: .08 @ -20° and 30 psi



**Parker**  
**89<sup>99</sup>**  
**B17-402**  
Mfg.#CRO-4 0/50

### Mechanical Temperature Control

- 72" remote bulb capillary (0 to 55°F)
- SPST switch opens low



**RANCO**  
**48<sup>99</sup>**  
**B10-516**  
Mfg.# 010-1409

### Fan Cycling Control

- SPST Open Low; Press. Range PSIG: 100 to 465
- Diff. PSIG: 25 to 85; 36" Cap. w/ Flare Nut



**Danfoss**  
**44<sup>99</sup>**  
**B14-742**  
Mfg.# 060-524200

### Low Pressure Control

- Pressure Range PSIG: 20" to 100
- Diff. PSIG: 7 to 50
- Switch Action: SPST Close High/Open Low



**Johnson Controls**  
**54<sup>99</sup>**  
**B11-561**  
Mfg.# P70AB-2C

### Defrost Termination Switch

- Replacement for Bohn, Larkin, Chandler & Climate Control products
- 35°F Cut-In, 55°F Cut-Out



**InterLINK**  
Commercial Refrigeration Parts  
**39<sup>99</sup>**  
**B12-834**  
Mfg.# 5709L

### Evap Foam® No Rinse

- Fresh-scented evaporator coil cleaner
- Foaming, safe for indoors
- 18 oz.



**Nu-Calgon**  
**6<sup>99</sup>**  
**B82-003**  
Mfg.# 4171-75

## Air Conditioning and Heat Pump TXV Kit

- 1-1/2 through 5 tons
- Adjustable superheat, built-in check valve, sweat connections, externally equalized
- 2 valves per refrigerant type with Aeroquip, Chatleff fittings, and ODF x SAE fittings
- Refrig. Type: R22/R407C & R410A



**Parker**

**199<sup>99</sup>**

B17-091  
Mfg. #TXV KIT

## Solenoid Operated Reversing Valve

- For unitary, split systems and window-type heat pump applications
- Instantaneously reversing



**ARANGO**

**111<sup>99</sup>**

B14-876  
Mfg. #V6-412080-170

## Coil

- For V1/V2/V3/V6/V10/V12-4 series valves
- 24 Volts
- Includes W29 wiring harness w/ 48" leads




**ARANGO**

**24<sup>99</sup>**

B14-880  
Mfg. #LDK-110000-070

## QwikLug™ Compressor Terminal Kit

- Attaches to damaged or corroded spade terminals
- 3 screw-tight connectors and wire nuts



**MAINSTREAM ENGINEERING**

**25<sup>99</sup>**

G32-265

Order #	Mfg. #	Wire Gauge	Lead Length	Pkg. Qty.	Price
G32-265	QT2910	10	4'	3	25.99
G32-266	QT2912	12	4'	3	26.99

## Base Mounted Shutoff Valves

- Sweat connection shutoff valves with extended copper fitting
- Service port machined for Schraeder type core



**Parker**

**12<sup>99</sup>**

B12-481

Order #	Mfg. #	Conn. Size	Height	Length	Price
B12-481	QL171R-06-06	3/8" ODF	2-3/8"	4-5/8"	12.99
B12-483	QL171R-12-12	3/4" ODF	3-3/8"	5"	21.99

## Heat Pump Filter-Drier

- Internal check valve
- Conn. Size: 3/8" ODF
- Cu. In.: 5
- R22/R410A Capacity: 5.0



Supplier of the Month

**EMERSON**  
Climate Technologies

**26<sup>99</sup>**

B12-291  
Mfg.# BFK-163S

**HOT DEAL**

## Heat Pump Defrost Timer

- Input: 18 to 30VAC
- Frequency: 50/60 Hz
- SPST, N.O.



**ICM CONTROLS**

**12<sup>99</sup>**

B11-806  
Mfg.# ICM300C

## Suction Accumulator

- Specifically designed for heat pumps
- 89 oz. holding capacity @ 40°F for R22
- Conn. Size: 3/4" ODF



**Parker**

**47<sup>99</sup>**

B81-392  
Mfg.# VPA589-6SRD

## MasterFit® Direct Replacement Multi-Horsepower Motor

- Is a direct replacement for mfg.# 51-20668-11, 51-23055-11, 51-23054-11 and 51-23053-11



**AC Smith**

**64<sup>99</sup>**

S89-728  
Mfg.# ORM5458B

## Universal Replacement Condenser Fan Blade

- Pitch: 27°
- Rot.: CW
- Size: 22"



**34<sup>99</sup>**

W89-012

## Crankcase Heater

- Size: 27-7/16" x 34-1/4"
- Volts: 240
- Watts: 54
- Installed to raise crankcase oil temperature and reduce its ability to attract and hold refrigerant



**12<sup>99</sup>**

B11-385  
Mfg.# CH10140

## Solenoid Valve Magnet Tool

- Temporarily replaces faulty coil to open solenoid valve
- Magnetically lifts the stem assembly and plunger
- Ideal for troubleshooting
- Fits most brands of solenoid valves including reversing valves



**CPS**

**19<sup>99</sup>**

B15-390  
Mfg.# TLMKC18



### Raywall Fan-Forced Wall Heater



- Dual wattage
- Built-in thermostat and thermal overload cut-off
- Powerful 12' downward air-throw
- White finish with heavy gauge front louvered cover
- Watts: 4,000-3,000/2,000-1,500
- Volts: 240/208
- BtuH: 13,652/6,826



**229<sup>00</sup>**

X90-238  
Mfg.# HF3316TRPW

### Surface Mounting Kit



- To be used with Raywall register style fan-forced wall heaters



**49<sup>99</sup>**  
X89-915

### Raywall Baseboard Heater



- Dual rated 240/208VAC or 120VAC
- Junction box with quick-connect feature at either end
- Length: 8'
- Volts: 240/208
- Watts: 2000/1500




**79<sup>99</sup>**

X90-286  
Mfg.# H2920-096SW

### Baseboard Heater Thermostat



- Baseboard mounted thermostat may be installed at either end
- White Color
- Single Pole



**19<sup>99</sup>**  
X71-206  
Mfg.# TBS

### Direct Vent Wall Furnaces



- One-touch operation
- 7-stage modulating gas valve and blower control
- Setback and frost protection
- Programmable thermostat
- Restart function allows automatic restart
- FOT-151 vent kit included



**1399<sup>00</sup>**

L99-485

Order #	Mfg. #	Gas Type	Type	Price
L99-485	ES38-N	NG	LED Control Panel Biege D-vent	1399.00
L99-486	ES38-P	LP	LED Control Panel Biege D-vent	1399.00

### Direct Drive Oil Furnace Highboy Upflow Model



- 81% AFUE
- 120V
- Easy access clean-out ports for heat exchanger servicing
- Nom. Tons: 2.5-4.0
- SCFM @ 0.5" SP: 1,590
- Flue Diam.: 6"



**999<sup>00</sup>**

L96-677  
Mfg.# OUF95-D4

### Gas-Fired Unit Heater Low Profile Design



- Certified for residential, commercial and industrial use
- Power vented
- 115VAC, 60 Hz, single-phase
- Natural gas-fired unit converts to propane via optional kit
- BtuH Input: 75,000
- BtuH Output: 60,000



**599<sup>00</sup>**

L98-703  
Mfg.# HD75AS0111

### Wall Furnace



- Milivolt and wall thermostat included
- All furnaces are natural gas; LP conversion kits available for most models
- BtuH Input: 35,000
- BtuH Output: 25,930



**399<sup>00</sup>**

L96-179  
Mfg.# 3509622

### Bimini Gas Fired Hot Water Boiler



#### Condensing, High Efficiency, Direct Spark

- Uses 60/100mm concentric vent
- Stainless steel burner
- Variable-speed blower assembly
- Gas Type: NG
- Sections: Mono Block
- AFUE: 95.2



L97-827  
Mfg.# BWC120



## 95% AFUE Upflow/ Horizontal Gas Furnaces

### GMVC95 Series, Two-Stage, Variable-Speed

- TuffTube™ tubular heat exchanger
- Two-stage gas valve
- Two-speed induced draft blower
- Variable-speed circulator motor
- Integrated electronic furnace control board



Order #	Mfg. #	BtuH Input	BtuH Output	Nom. CFM	Width
L90-095	GMVC950453BX	46,000	45,000	1,400	17-1/2"
L90-096	GMVC950704CX	69,000	67,000	1,760	21"
L90-097	GMVC950905DX	92,000	90,000	2,200	24-1/2"
L90-702	GMVC950905CX	92,000	90,000	2,200	21"
L90-098	GMVC951155DX	115,000	109,000	2,200	24-1/2"

## 95% AFUE Downflow/ Horizontal Gas Furnaces

### GCVC9 Series, Two-Stage, Variable-Speed

- TuffTube™ tubular heat exchanger
- Two-stage gas valve
- Two-speed induced draft blower
- Integrated electronic furnace control board



Order #	Mfg. #	BtuH Input	BtuH Output	CFM @ 0.5" ESP	Width
L90-707	GCVC950714CX	69,000	65,000	1,600	21"
L90-708	GCVC950915DX	92,000	87,000	1,970	24-1/2"
L90-094	GCVC91155DX	115,000	109,000	1,878	24-1/2"

## Manufactured Housing Electric Furnaces

### Downflow

- Multi-speed blower capable of handling up to 48,000 BtuH of cooling or 42,000 BtuH when used with a heat pump
- Built-in coil cabinet
- Circuit breaker protection
- 230V



Order #	Mfg. #	Nom. kW	BtuH Output	CFM Low @ 0.3" W.C.	CFM High @ 0.3" W.C.
L96-324	EB10D	10.0	34,000	924	1,435
L96-452	EB12D	11.4	39,000	924	1,435
L96-325	EB15D	15.0	51,000	924	1,435
L96-453	EB17D	16.4	56,000	1,140	1,435
L96-326	EB20D	19.6	67,000	1,140	1,435
L96-454	EB23D	22.6	77,000	1,140	1,435

## New Heat Pumps

### 14 SEER, Single-Phase, 1-1/2 To 5 Tons, R410A

- Steel louver coil guard
- High efficiency Copeland scroll compressor
- High pressure and low pressure switch
- Factory installed bi-flow filter-drier
- 850 RPM condenser fan motor
- Copper tube/enhanced aluminum fin coil



Order #	Mfg. #	Nom. Tons	HSPF	Min. Circuit Amps	Max. Fuse Size
B72-606	GSZ140181	1-1/2	8.6	11.8	20
B72-607	GSZ140241	2	8.6	17.1	25
B72-608	GSZ140301	2-1/2	8.6	18.7	30
B72-609	GSZ140361	3	9	22.4	30
B72-610	GSZ140421	3-1/2	9	24	40
B72-611	GSZ140481	4	9	26.4	40
B72-612	GSZ140601	5	9	34.6	60

## Gas/Electric Packaged Air Conditioners

### 15 SEER, Single-Phase, 2 to 5 Tons, R410A, 80% AFUE, Multi-Position

- High-efficiency compressor
- T-140 aluminized steel tubular heat exchanger
- Energy-efficient EEM motor
- Copper tube/aluminum fin coil with TXV
- 2-stage gas valve
- Field convertible to LP
- Direct spark ignition
- 208/230 volts



Order #	Mfg. #	Nom. Tons	BtuH Cooling	BtuH Heating Input	BtuH Heating Output
B96-853	GPG152407041	2	23,200	69,000	55,000
B90-064	GPG153009041	2-1/2	29,000	92,000	72,900
B90-065	GPG153709041	3	35,000	92,000	72,900
B90-066	GPG154211541	3-1/2	40,000	115,000	91,200
B90-067	GPG154911541	4	47,000	115,000	91,200
B96-856	GPG156014041	5	56,500	138,000	110,200





### 318-V Video Pro Scope

- Digital inspection scope with video output
- 2.5" high resolution color LCD display (320 x 240)
- Includes clip-on mirror, magnet, batteries and case

**199<sup>99</sup>**

H85-536  
Mfg. #400563 VP42



### Carbon Monoxide Meter

- Measures carbon monoxide (CO) from 0–1,999 PPM
- User adjustable alarm points with audible and visual indicators
- Reads true concentration even when powered up in CO contaminated areas

**179<sup>99</sup>**

H26-323  
Mfg. #0632 3173



### Vane Anemometer

- Airflow velocity meter with temperature measurement
- Max./Min./Hold functions
- Backlit display

**114<sup>99</sup>**

H26-826  
Mfg.# 0560-4101



### Auto-Ranging Differential Manometer

- Provides pressure, differential pressure, and air velocity measurements
- User selectable units of measure
- Backlit display

**144<sup>99</sup>**

H26-324  
Mfg. #0560 0510



### HVAC Guide<sup>®</sup> System Analyzer

- Step-by-step guide through the most common HVAC system tests including target evaporator exit temperature, superheat, subcooling, and combustion analysis
- CheckME! testing feature is approved for many utility rebate and incentive programs

**249<sup>99</sup>**

H27-044  
Mfg.# HG2



### Carbon Monoxide Accessory Head

- Fast enough to locate CO in "walk-around" tests
- Connects to Fieldpiece meters, data loggers and H26-113 EHD1 electronic handle
- Range: 0–1,000 PPM

**134<sup>99</sup>**

H26-249  
Mfg.# ACM3



### Combustion Check Accessory Head

- Measures % oxygen and temperature, and calculates % carbon dioxide
- Connects to Fieldpiece meters, data loggers and H26-113 EHD1 electronic handle

**149<sup>99</sup>**

H26-641  
Mfg.# AOX2



### Dual Port Manometer Accessory Head

- Displays in W.C. or mBar
- Connects to Fieldpiece meters, data loggers and H26-113 EHD1 electronic handle
- Range: -60.0" to +60.0" W.C.
- Resolution: down to 0.01" W.C.

**94<sup>99</sup>**

H26-735  
Mfg.# ADMN2



## Informant 2 Leak Detector

- Dual purpose refrigerant and combustible gas leak detector
- Refrigerant sensitivity: 0.25 oz./yr.
- Combustible gas sensitivity: 50 PPM

**299<sup>99</sup>**

H85-388  
Mfg.# 19-8038



**BACHARACH**

## Ultimate Puller

- Removes various sizes of fan blades and blower wheels
- Both pushing and pulling force
- Hardened steel hooks and screws won't flatten with use

**39<sup>99</sup>**

H85-404  
Mfg.# UP-1



57



## New Whisper Ultrasonic Leak Detector

- Detects ultrasonic frequencies generated by leaks of any gas under pressure or vacuum
- Adjustable sensitivity

**149<sup>99</sup>**

H27-054  
Mfg.# 711-202-G1



**TNFICON**

## Magnetic Torpedo Level

- Large reversible easy-reading vials
- Heat-resistant, unbreakable endplates and internal aluminum frame

**13<sup>99</sup>**

H23-907  
Mfg.# 839



**GENERAL**

## 13-Piece Hex Key Set

- Includes 0.050", 1/16", 5/64", 3/32", 7/64", 1/8", 9/64", 5/32", 3/16", 7/32", 1/4", 5/16" and 3/8"

**8<sup>99</sup>**

H25-810  
Mfg.# 56612G



**ALLEN**

## New Bi-Metal Utility Bit Kit

- High speed steel cutting edges provide long life in tough applications
- Includes 3/4", 7/8" and 1" bits

**39<sup>99</sup>**

H27-140  
Mfg.# 10954300S



**LENOX**

## New 5-Piece Flex Flare Nut Wrench Set

- Flexible flare ends for greater access around obstructions
- Includes 1/4" x 5/16", 3/8" x 7/16", 1/2" x 9/16", 5/8" x 11/16" and 3/4" x 7/8"

**59<sup>99</sup>**

H27-168  
Mfg.# 81910



**GEARWRENCH**

## Extra Long Magnetic Hex Drivers

- Use with power drills or Connex quick change handles
- Hex drivers are color coded for easy size identification
- 1/4" power insert shanks

**5<sup>99</sup>**

H27-102



**Malco**

Order #	Mfg. #	Hex Opening	Length	Price
H27-102	MSHML14	1/4"	4"	5.99
H27-103	MSHML516	5/16"	4"	6.99
H27-104	MSHXL14	1/4"	6"	8.99
H27-105	MSHXL516	5/16"	6"	9.99

## Prices Valid November 1–30, 2011 at Participating Johnstone Supply Stores

Prices subject to change. Contact your local Johnstone Supply location. Johnstone Supply is committed to illustrate and describe all the products in this flyer accurately. Such descriptions and illustrations are for the purpose of identification, and do not imply that the products will conform to the descriptions or illustrations. Copyright © 2011 Johnstone Supply, Inc. Marca Registrada. All rights reserved, no part of this mailer or its inserts may be reproduced in any form without written permission from Johnstone Supply, Inc.

G

### Clamp-On Meter

- Backlit display
- Measures AC/DC voltage, AC current, resistance and continuity

**32<sup>99</sup>**

**H26-156**  
Mfg.# UTL260



### Ventilation And Refrigeration Universal Motor Kit

- Includes 4" and 5-1/2" fan blades, mounting brackets, 1/4" and 5/16" shaft adapter and hub adapter
- 1 speed, C frame, 3000 RPM, 115V, sleeve bearing type
- Volts: 115


**13<sup>99</sup>**

**S58-464**  
Mfg.# 65670



### Cloth Duct Tape

- 2" x 60'
- UL723
- 10.5 mils



**Shurtape<sup>®</sup>**

**5<sup>29</sup>**

**G89-876**  
Mfg.# PC-609

### Disconnect Switch

- Heavy-duty disconnects with two-position pullouts or switches
- Cover remains in place when open; protective shield covers wiring



**10<sup>99</sup>**

**G84-940**  
Mfg.# DPU222R