




E209344

SAFE-T-SWITCH® MODEL SS1

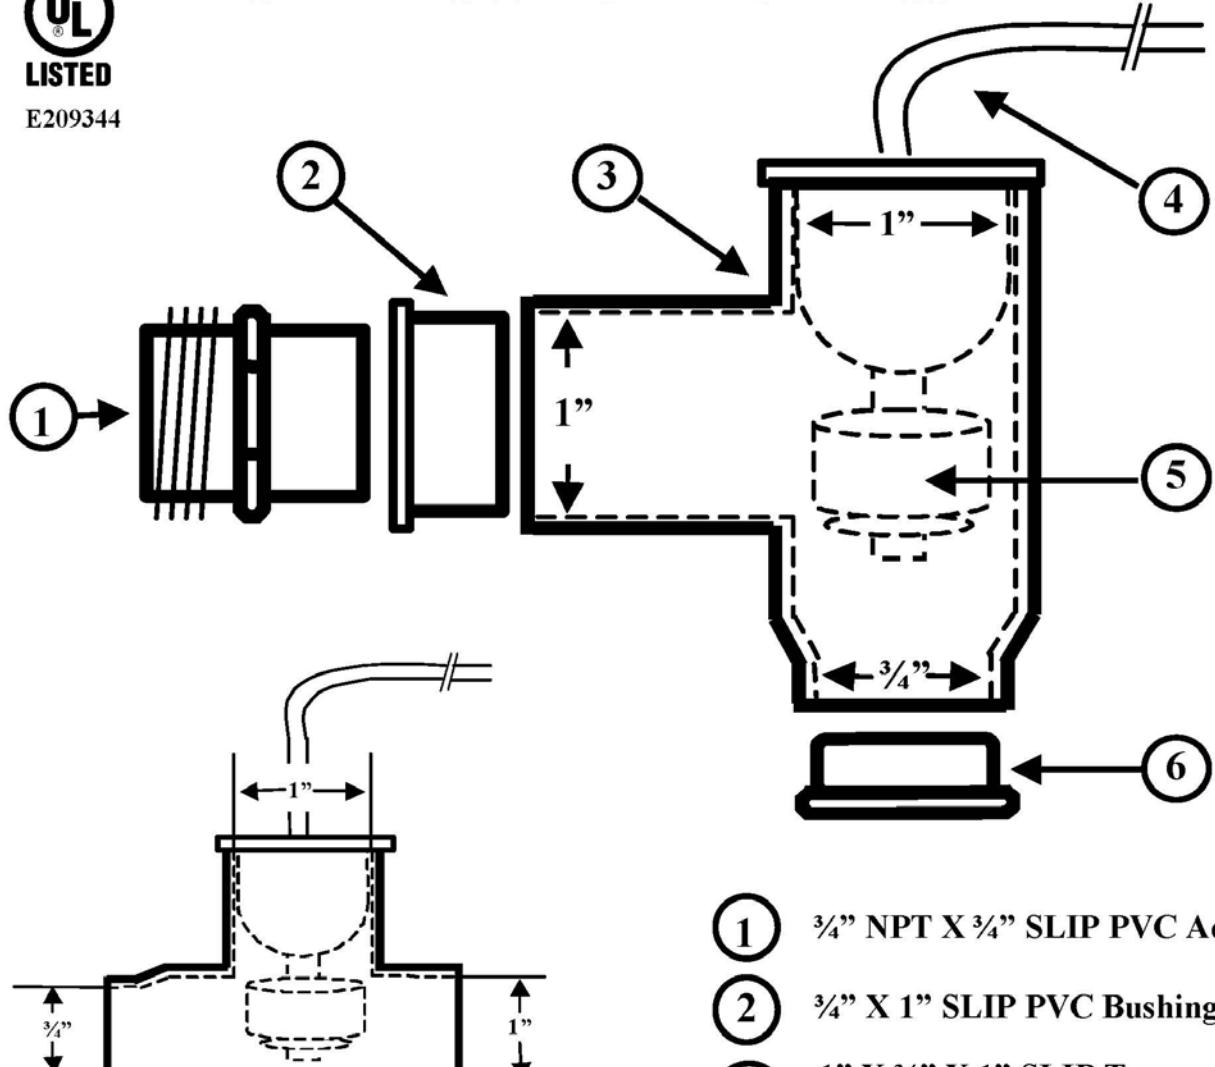

HORIZONTAL APPLICATION

RECTORSEAL
2601 Spenwick Dr
Houston, TX 77055
800-231-3345 www.rectorseal.com

PART NAME:

**MODEL SS1 1/4" INLINE A/C CONDENSATE
DRAIN OVERFLOW KIT**

TOLERANCES:
(EXCEPT WHERE NOTED)

.XX ± .020
.XXX ± .005
.XXXX ± .0005
ANG. ± 1/2 °

SCALE:

NONE

DRAWN BY:

MTB

DATE:

3/27/06

DRAWING #:

SS1

APPROVED BY:

SPO

REVISION:

A

- ① 3/4" NPT X 3/4" SLIP PVC Adaptor
- ② 3/4" X 1" SLIP PVC Bushing
- ③ 1" X 3/4" X 1" SLIP Tee
(Schedule 40 / PVC 1)
- ④ 72"-Inch, 18AWG Cables
(Prewired/Potted)
- ⑤ Electrically Potted Switch/Cap
Assembly
- ⑥ 3/4" SLIP Plug for Close
Coupled Applications

REQUIREMENTS:

- Potted, water sealed reed/magnet switch design.
- UL 508 compliant.
- Schedule 40 PVC1 plastic components
- 2.5 Amp Carry capacity
- 1.25 Amp switching capacity