

WASHING MACHINE OUTLET BOX

>> 696 SERIES

OxBox ONE™

SPECIFICATION

Sioux Chief 696 series OxBox ONE™ washing machine outlet box shall be installed as necessary in plumbing supply/drainage systems. Unit shall allow for mounting on stud or between studs using provided bracket. Unit shall be available with 1/4-turn ball valves or 1/4-turn ball valves with arresters. Arresters shall be certified to ASSE 1010 and shall be UPC listed. Adjustable support bracket shall be included in the package. Bracket shall slide into the top track of the box for between stud configurations. Box shall be available with an integral test nipple on knockout. Outlet connections shall generally be 3/4".

MATERIALS

Outlet box: ABS (white)

Frame: ABS (white)

VALVE/ARRESTER WORKING LIMITS

Max working temperature: 250°F

Max testing air pressure: 100 PSIG

Max working/testing water pressure: 250 PSIG


DIMENSIONS

A: box rough-in width	4"
B: box rough-in height	5½"
C: box depth	3½"
D: drain connection	2"
E: test nipple	5/8" O.D.
F: bracket length	11" – 18"
G: bracket width	5/8"
H: frame width	5¾"
I: frame height	7¼"

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____



696-2413MF

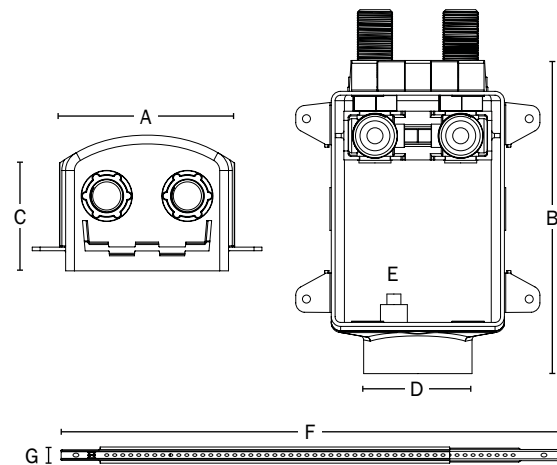

Create Item Number

696-24A3BF

e.g. 696-2413MF: double hose bibb outlet connection access box with 2" drain connection

ARRESTER A

0 = no arrester

1 = with arrester*

SUPPLY CONNECTION B

M = 1/2" female sweat

C = 1/2" male CPVC

X = 1/2" PEX F1807 Crimp

W = 1/2" PEX F1960 Grip