


Features:

- 5 years parts warranty - 2 years labor warranty
- Generator typically can be installed up to 25 ft from the bathing area
- Diagnostic LED Displays
- Stainless-Steel Construction
- Solid-State Circuitry

Codes/Standards:

- UL 499
- UL/CUL Listed
- City of LA - Approved
- City of New York - M.E.A. Approved

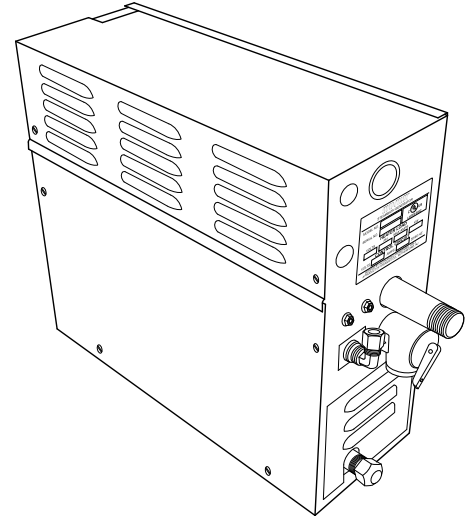

Important:

In order for the InstaMist feature to function on model SM-11-IM, water must always be in the tank. For this reason the factory installed Auto-Drain is *NOT* available with any InstaMist generators.

Steam Generator Specification Chart

Model Number	Product Number	KW Rating	Max. Cu. Ft. Range *	Volts/Phase/Max. Amps	Wire Size 90°C Copper AWG	Line Fuse	Dimensions L x W x H
SM-11	1100	11	400	240/1/46	6	60	17½" x 6½" x 15½"
	1101			208/1/53	6	70	
	1102			240/3/27	8	35	
	1103			208/3/31	8	40	
SM-11-IM	1100-IM			240/1/46	6	60	
	1101-IM			208/1/53	6	70	
	1102-IM			240/3/27	8	35	
	1103-IM			208/3/31	8	40	

* Refer to sizing guidelines to accurately determine the proper size generator for the installation.

Required Equipment:

TC-110, TC-135, TC-125, TC-150DSC-425, or DSP Controls

Required Electrical Service:

Dedicated circuit required: See Specification Chart for proper electrical requirements

Product Information:

Dedicated circuit required: See Specification Chart for proper electrical requirements

- Water Supply - ⅜" Compression Fitting
- Steam Line - ¾" Brass BPT male thread
- Pressure Relief Valve - ¾" NPT female thread
- Drain Line - Capped ½" Brass NPT male thread (Not available on InstaMist models.)

Generator:


Weight - 40 lbs.

Installation Notes:


- Steam Generators can be typically mounted within 25ft of the bathing area.
- Steam Generators should be accessible for service.
- Do not install generators outside, in moist, humid area or in an area where parts may freeze or corrode.
- Steamhead to be mounted 18" above floor or 6" above rim of tub and as far from the seating area as possible.

Rough-In Notes:

Access: 28"W x 18"D x 20"H (35"W with Auto-Drain)

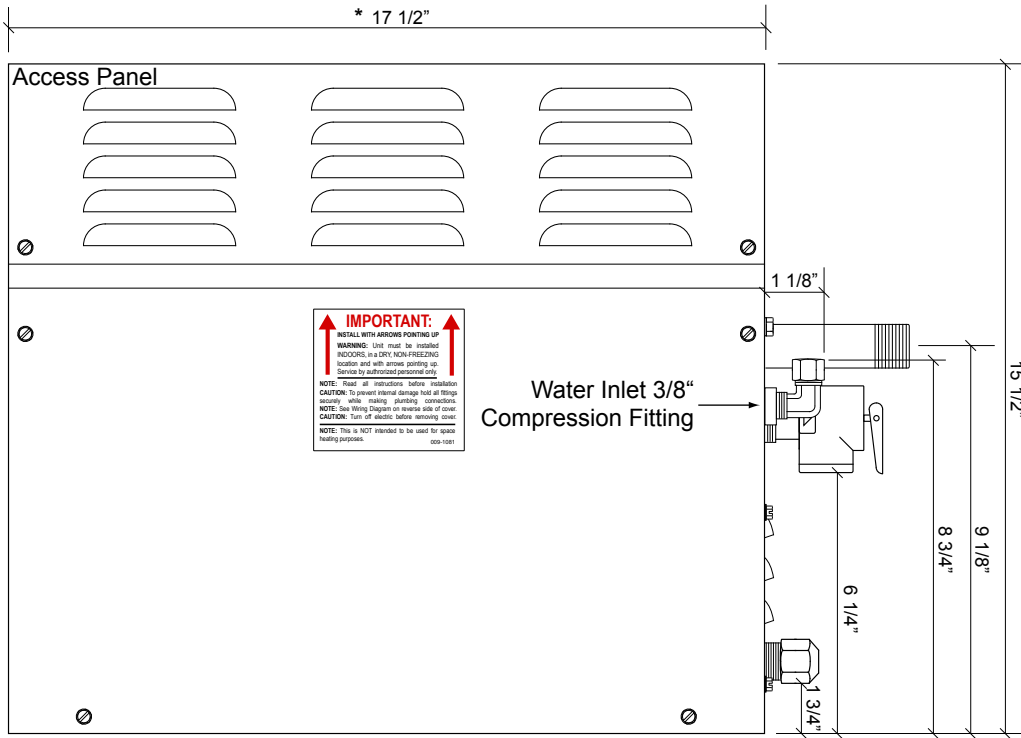


Front Access

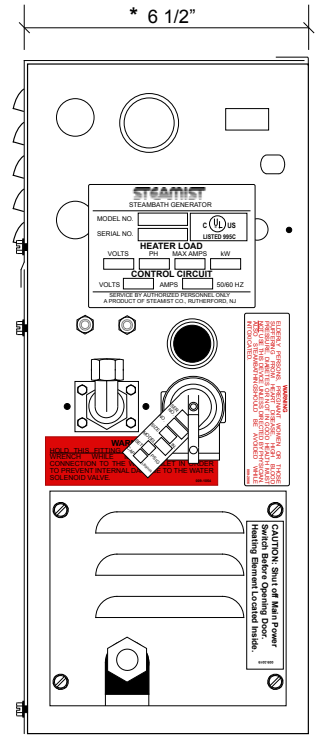


Front Side View

* Add 1/4" to the dimension for the louvres

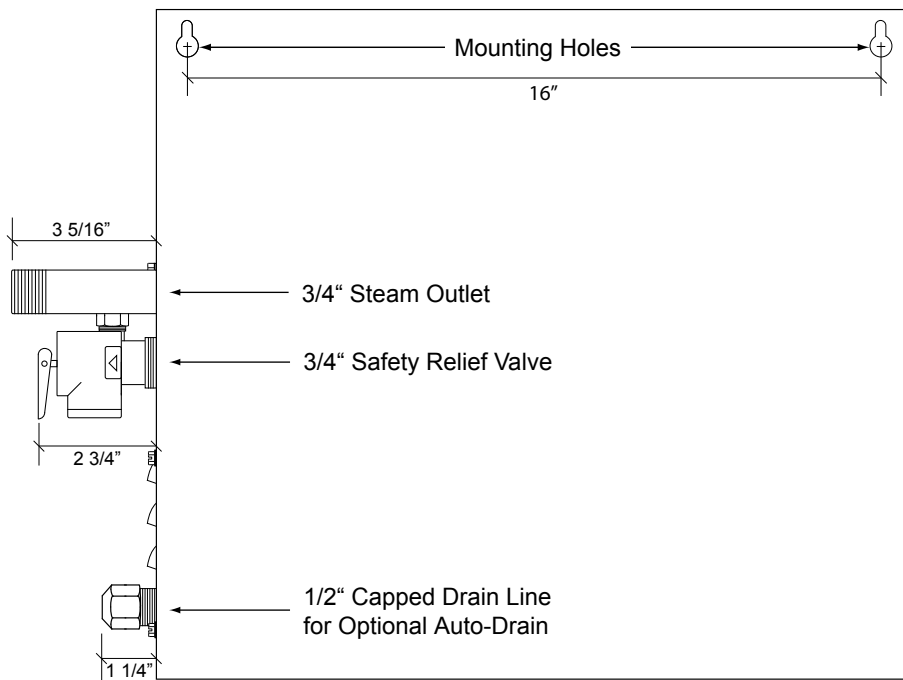

Back View

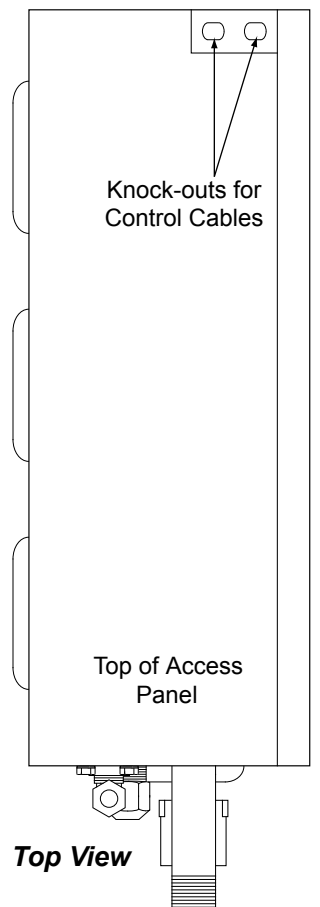

Top View



East Coast Office: 275 Veterans Blvd., Rutherford, NJ 07070 • Tel: (800) 577-6478 • Fax: (201) 933-0746
 West Coast Office: 315 W. Pondera St., Suite F, Lancaster, CA 93534 • Tel: (800) 355-6478 • Fax: (661)940-1617