



A KOHLER COMPANY

ENSEMBLE™

Features

- Compression molded from Sterling's exclusive solid VIKRELL™ material
- Modular 4-piece design
- Tongue-and-groove "snap together" design allows for easy installation
- Convenient shelves provide generous storage
- Shaving ledge and foot rest added for comfort
- Receptor can be ordered separately
- Lightly pebbled bottom surface for sure footing
- Durable high gloss finish
- 10 year consumer/3 year commercial limited warranty
- 42" (106.7 cm) x 35-1/4" (89.5 cm) x 77" (195.6 cm) rough-in dimensions include nailing flange
- 42" (106.7 cm) x 34" (86.4 cm) x 75-3/4" (192.6 cm) complete unit finished dimensions

Codes/Standards Applicable


Specified model meets or exceeds the following:

- ANSI Z124.2
- IAPMO/UPC
- CSA B45
- ASTM F462 Slip Resistance

42" (106.7 cm) SHOWER RECEPTOR AND WALL SURROUND

72110100

ALSO 72210100

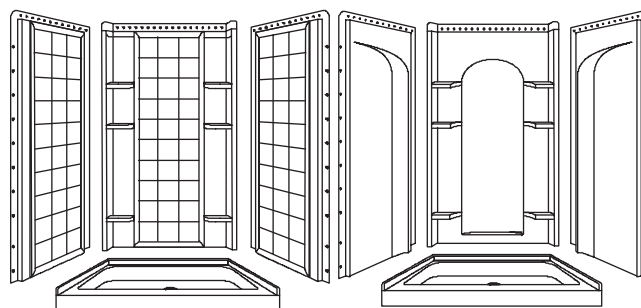

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Complete Unit Description	Colors/Finishes	
72110100	42" (98.1 cm) shower receptor and tile wall surround	☐ 0 White	☐ Other_____
72210100	42" (98.1 cm) shower receptor and curve wall surround	☐ 0 White	☐ Other_____

Model	Wall Component Description	Colors/Finishes	
72112100	Back wall, tile	☐ 0 White	☐ Other_____
72103110	Left end wall, tile	☐ 0 White	☐ Other_____
72103120	Right end wall, tile	☐ 0 White	☐ Other_____
72114100	Complete wall set, tile	☐ 0 White	☐ Other_____
72105100	End wall set, tile	☐ 0 White	☐ Other_____
72212100	Back wall, curve	☐ 0 White	☐ Other_____
72203110	Left end wall, curve	☐ 0 White	☐ Other_____
72203120	Right end wall, curve	☐ 0 White	☐ Other_____
72214100	Complete wall set, curve	☐ 0 White	☐ Other_____
72205100	End wall set, curve	☐ 0 White	☐ Other_____

SterlingPlumbing.com

Visit us online for fixture color choices, detailed product information, color photos, installation instructions, care guides, and warranties. Sterling offers additional lines of plumbing products to complement the Sterling product you've chosen. Sign up for the Sterling monthly e-newsletter which showcases our latest product innovations. You may also call our Sterling Plumbing Answer Center from within the USA at 1-888-STERLING in addition to consulting with your local dealer. Sterling. Strong. Professional. Design.

ENSEMBLE™

Technical Information

Model	door maximum width	door maximum height
72110100/ 72210100	38-5/8" (98.1 cm)	70-1/2" (179.1 cm)

Installation Notes

Install this product according to the installation guide.



Size the drain cutout to fit the drain assembly that will be used.

End stud positioning is critical if nailing-in flanges are to be used.

Double studding is recommended for pivot shower door installations.

Studs should be positioned roughly as shown for roofing nail installation.

Both tile and curve wall surrounds share the same dimensions.

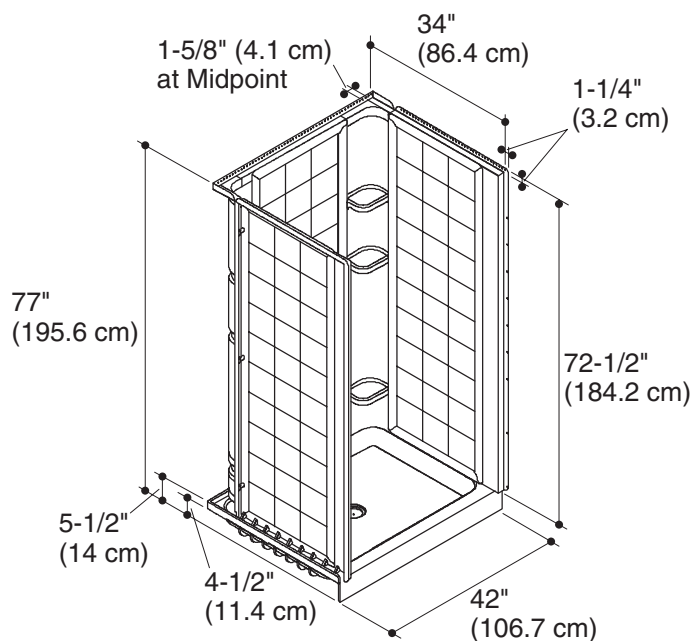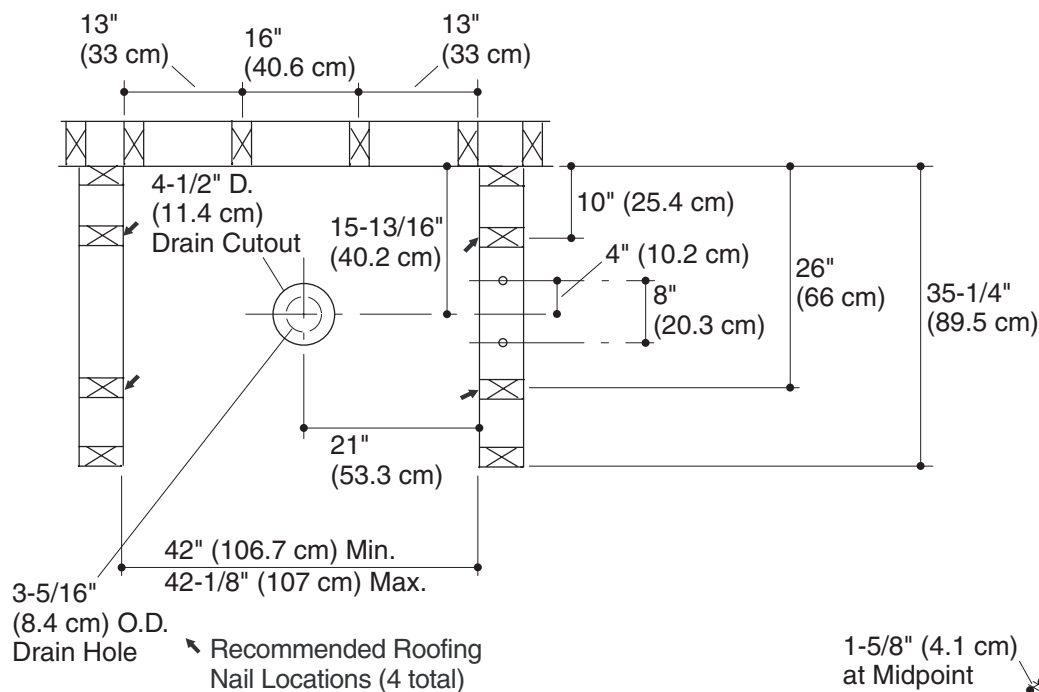

Product Diagram