




USAIRE

MODEL LMH

Model LMH

Adjustable Curved Blade Supply (1 Way)

Table with columns: Size Area, Inlet Velocity, and performance metrics (100, 200, 300, 400, 500, 600, 700, 800, 900, 1000) for various sizes (6x4 to 22x10) and configurations (CFM, Throw, NC).

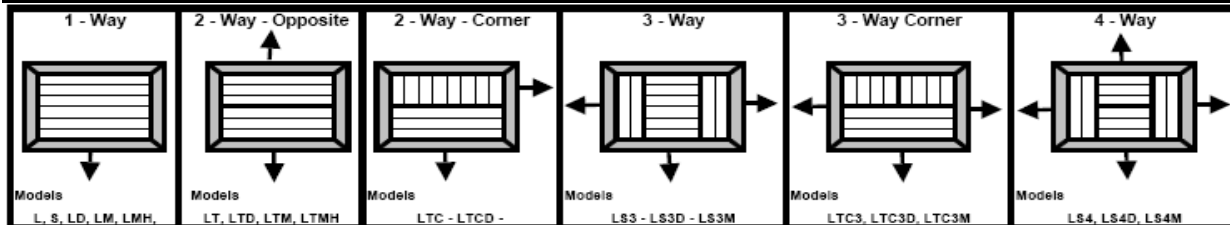

Notes

All Units have been tested in accordance with ANSI / ASHRAE 70-2006. Data in table is derived from such testing. Ps - Static pressure required to obtain listed cfm, units of inches water gauge (in. wg.) NC - Cal Example: 25-20-18-15 (1 Way - 2 Way - 3 Way - 4 Way ) Throw - Max. face throw in feet for a terminal velocity of 50 fpm

For sizes not shown, refer to online tools GRD Selection Program performance calculator on Home Page