



BLUE™ Universal Touchscreen Thermostats

Single Stage/Multi-Stage/Heat Pump

Choice of Single Stage, Staging or Staging with Humidity Control

7 Day, 5+1+1 Day Programmable or Non-Programmable

Hardwired or Battery Powered – or Power Stealing Assist (1F95-1291)



1F95-1291

Universal – Humidity Control

Single Stage	Multi-Stage	Heat Pump
1/1	2/2	4/2

1F95-1277

Universal – Programmable Fan/Remote Sensor

Single Stage	Multi-Stage	Heat Pump
1/1	2/2	3/2

1F97-1277

Programmable Fan/Remote Sensor

Single Stage	Multi-Stage	Heat Pump
1/1		2/1



1F95-1291

5-Year Warranty

Emerson...Delivering Comfort & Innovation

Emerson® Blue™ 12 Square-Inch Touchscreens offer more features, delivering a new level of comfort to your customers.

Simple and logical installer menu set-up and programming and operation are enhanced with audio confirmation of touchscreen entries. Features like variable touchscreen security to prevent tampering, temporary and vacation overrides, and filter change reminders add convenience.

Blue touchscreen thermostats include humidity control, programmable fan and remote sensing, as well as the exclusive Cool Savings™ feature and heat pump dual fuel control, providing the ultimate in comfort control. Our +/- 1° temperature accuracy will keep your customers comfortable and protect their HVAC systems.

Emerson Blue is the result of smart, innovative thinking. Install Blue with confidence because it's exclusively for the professional trade. See back for all the specifications.

White
Rodgers™


EMERSON
Climate Technologies

BLUE™ Universal Touchscreen Thermostats

1F95-1291/1F95-1277
Single Stage/Multi-Stage/Heat Pump

Choice of Single Stage, Staging or Staging with Humidity Control
7 Day, 5+1+1 Day Programmable or Non-Programmable
Hardwired or Battery Powered – or Power Stealing Assist (1F95-1291)

1F97-1277
Single Stage/Heat Pump

Exclusive Blue™ Features

- Humidity control – 1F95-1291
- Dual fuel capable with Smart Fuel™ Logic Program or outdoor temperature sensor – 1F95-1291
- Dual fuel with outdoor temperature sensor – 1F97/95-1277
- Large, 12 square-inch display with 10-second backlight
- Exclusive Cool Savings™ feature saves energy during peak A/C demand periods
- Remote sensing indoor or outdoor and at the thermostat
- Programmable fan
- Automatic daylight savings option

Programming

- Choice of 7 day, 5+1+1 day programmable or ∅ (non-programmable) (installer selectable)
- 4 time and 4 temperature settings per program (2 setbacks) heat and cool, or selectable - 2 time and 2 temperature settings (1 setback)
- Energy savings up to 33%

Display

- Large, 12 square-inch touchscreen display
- Blue, high-contrast lighted display for easier low-light viewing
- Larger, easy-to-read character size
- Extra-large touch keys for easy operation

Performance

- Universal Dual-Powered – choice of hardwired or battery back-up – or power stealing assist (1F95-1291)

Selectable Energy Management Recovery

Meets California Building Code, Title 24

Fast (FA) or slow (SL) heating cycle anticipation

Exclusive “Call for Service” diagnostic indicator

Compressor lockout protection

Millivolt compatible

Electric heat option

Comfort & Convenience

Intuitive menu-driven set-up, programming and operation, with audio prompt to confirm touchscreen entries

Permanent program retention during power loss

Indefinite setpoint Hold or 4-hour temporary temperature override

Temporary temperature override – can be set from 15 minutes for temporary adjustments up to 7 days for Vacation override

Auto heat/cool changeover option – automatically switches between heating and cooling programs

Heating and cooling, heating only or cooling only configuration (installer selectable)

Setpoint temperature “limited range” capable

Enhanced (variable) touchscreen security prevents tampering


Furnace filter change reminder

Humidifier pad change reminder

Maintains room temperature to within +/- 1° F

Room temperature display can be recalibrated up to +/- 4° F

Terminal Designations* – Terminal Block Wire Connections

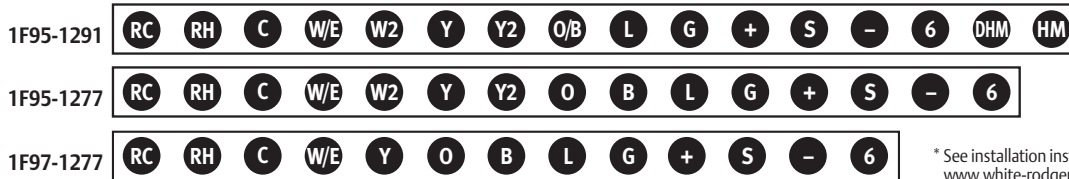

* See installation instructions or www.white-rogers.com for terminal descriptions

Dimensions

4.6"H x 5.9"W x 1.2"D

Thermal Specifications

Setpoint Temperature Range:
45° to 99° F (7° to 37° C)

Rated Differential:
Heat 0.6° F; Cool 1.2° F

Operating Ambient Temperature:
32° to 105° F (0° to 41° C)

Operating Humidity Range:
90% non-condensing maximum

Shipping Temperature Range:
-40° to 150° F (-40° to 65° C)

Electrical Specifications

Rating

Battery Power: mV to 30 VAC, NEC Class II, 50/60 Hz or DC

Input-Hardwire: 20 to 30 VAC

1.5 Amps (load per terminal)

2.5 Amps maximum load (all terminals combined)

Standard Systems

Single Stage gas, oil, electric

Single Stage heat pump

Millivolt Systems

Multi-Stage gas, oil, electric (1F95-1291, 1F95-1277)

Multi-Stage heat pump (1F95-1291, 1F95-1277, 1F97-1277)

Accessories

Remote Sensors

Indoor – F145-1328

Outdoor – F145-1378

Thermostat Guards

Clear – F29-0198

Metal – F29-0220 (solid base)

F29-0222 (ring base)

Wall Plates

F61-2600 (8.1"W x 5.4"H)

F61-2634 (6.5"W x 5"H)

Contractor Branding

Imprint thermostat with your contact information.
See your wholesaler or visit white-rogers.com.

Single Stage	Multi-Stage	Heat Pump	Model	Programs		Applications			Selectable Performance Features										Comfort and Convenience Features												
				Model Number	Program Options	Periods Per Day Options	Gas/Oil/Electric	3 Wire Zone	Millivolt	Humidity Control (H) Humidity (D) Dehumidify	Power Source	Auto Changeover	Heat Only or Cool Only Option	Programmable Fan	Energy Mgt. Recovery	Energy Aware	Dual Fuel Option	Keypad Lockout	Setpoint Temp. Lmts. Adj.	Indoor Remote Sensor*	Outdoor Remote Sensor*	User Interface (T) Touchscreen / (B) Button	Display Size (Square Inches)	Lighted Display**	Audible Feedback	Alkaline Battery Life** (Years)	Cool Savings™	Daylight Sav. Adj. (A)Auto / (B)Button	Furnace Lockout Ignit. Mod. Reset	Memory Back-up (P) Permanent (B) Battery	Display Temp. Recalibration
1/1	2/2	4/2	1F95-1291	7,5+1+1,∅	4, 2, ∅	4, 2, ∅	✓	✓	✓	H/D	B,H,PA	✓	✓	✓	✓	✓	✓	✓	✓	✓	T	12.0	✓	✓	3	✓	A	✓	P	✓	5
1/1	2/2	3/2	1F95-1277	7,5+1+1,∅	4, 2, ∅	4, 2, ∅	✓	✓	✓		B,H	✓	✓	✓	✓	✓	✓	✓	✓	✓	T	12.0	✓	✓	3	✓	A	✓	P	✓	5
1/1		2/1	1F97-1277	7,5+1+1,∅	4, 2, ∅	4, 2, ∅	✓	✓	✓		B,H	✓	✓	✓	✓	✓	✓	✓	✓	✓	T	12.0	✓	✓	3	✓	A	✓	P	✓	5

B = Battery, H = Hardwired, PA = Power Stealing Assist *** Optional Continuous Display Light w/Hardwire Connection ** Recommended Battery Change Interval Is Once Per Year
▼ Only One (1) Remote Sensor May Be Used – Either Indoor or Outdoor; or Logic Program and Indoor Remote Sensor

White
Rodgers™

Saint Louis, Missouri
314-553-3600

Markham, Ontario
905-948-3411

www.white-rogers.com
www.emersonclimate.com

The Emerson logo is a trademark and a service mark of Emerson Electric Co.


EMERSON
Climate Technologies

WR-1959-6