

Valves & Fittings


SF5000 Series Saddle Valve Copper to Copper



Completely self tapping. Steel pin with core penetrates line and is locked into valve body in one operation, simply by tightening cap.



SF5514 SF5516 SF5538 SF5558



SF5518 SF5534 SF5578

PART NO.	TUBING	PART NO.	TUBING
SF5512	1/2" O.D.	SF5534	3/4" O.D.
SF5514	1/4" O.D.	SF5538	3/8" O.D.
SF5516	5/16" O.D.	SF5558	5/8" O.D.
SF5518	1 1/8" O.D.	SF5578	7/8" O.D.


Replacement Gasket

PART NO.	DESCRIPTION
SF5501	25 per pack

SF8400 Series Economy Service Valves




SF8400 SF8408 SF8403 SF8404 SF8405 SF8406

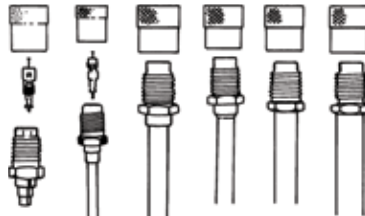

PART NO.	I.D. HOLE	O.D.	MOUNTING
SF8400	1/8"	3/16", 1/4", 5/16" Step	Braze Only with SF1515 Core
SF8408	1/8" Tube	3/16", 1/4", 5/16" Step	
SF8403		3/16" Tube, 1/4" Step	
SF8404		1/4" Tube	
SF8405		5/16" Tube	
SF8406		3/8" Tube	

SF8000 Series Universal Line Valves



Available in various sizes. Copper Tee with the body brazed on. Two styles - a flared or straight end copper piece. (See chart below for exact size.)

Straight Copper Piece

PART NO.	LENGTH	I.D.	O.D.
SF8418	1 7/8"	1 1/8"	1 1/4"
SF8434	1 5/16"	3/4"	13/16"
SF8478	1 9/16"	7/8"	1"

Flared Copper Piece

PART NO.	LENGTH	I.D.	O.D.
SF8412	1 3/4"	1/2"	9/16"
SF8414	2 9/32"	1/4"	5/16"
SF8416	2"	5/16"	3/8"
SF8458	2"	5/8"	11/16"

SF4040 Charging Hose Flow-Control Valve




- Reliable and easy to use
- Install on the end of a charging hose and minimize refrigerant loss during servicing
- A quarter turn of the handle makes quick work of turning on and off
- Straight flow through design offers maximum flow rate
- Brass depressor tip fully engages valve core

SF1818 and SF1414 Brass Bodies



- Both bodies complete with neoprene seal, core and cap.
- Each is a quarter male flare above the hex.



SF1818
(1/8" NPT-DRYSEAL)



SF1414
(1/4" MPT-DRYSEAL)

Valve Replacement Parts



PART NO.	DESCRIPTION
SF2235	Heavy duty hex brass cap with dual neoprene or metal seal
SF2245	Heavy duty round brass cap with neoprene seal
SF2250	Heavy duty round brass cap with handy core wrench on top and neoprene seal
SF4450	Valve core with neoprene seal compatible with most refrigerants (Replaces SF1515)
SF5161	5/16" OD neoprene hose gasket for charging hoses